
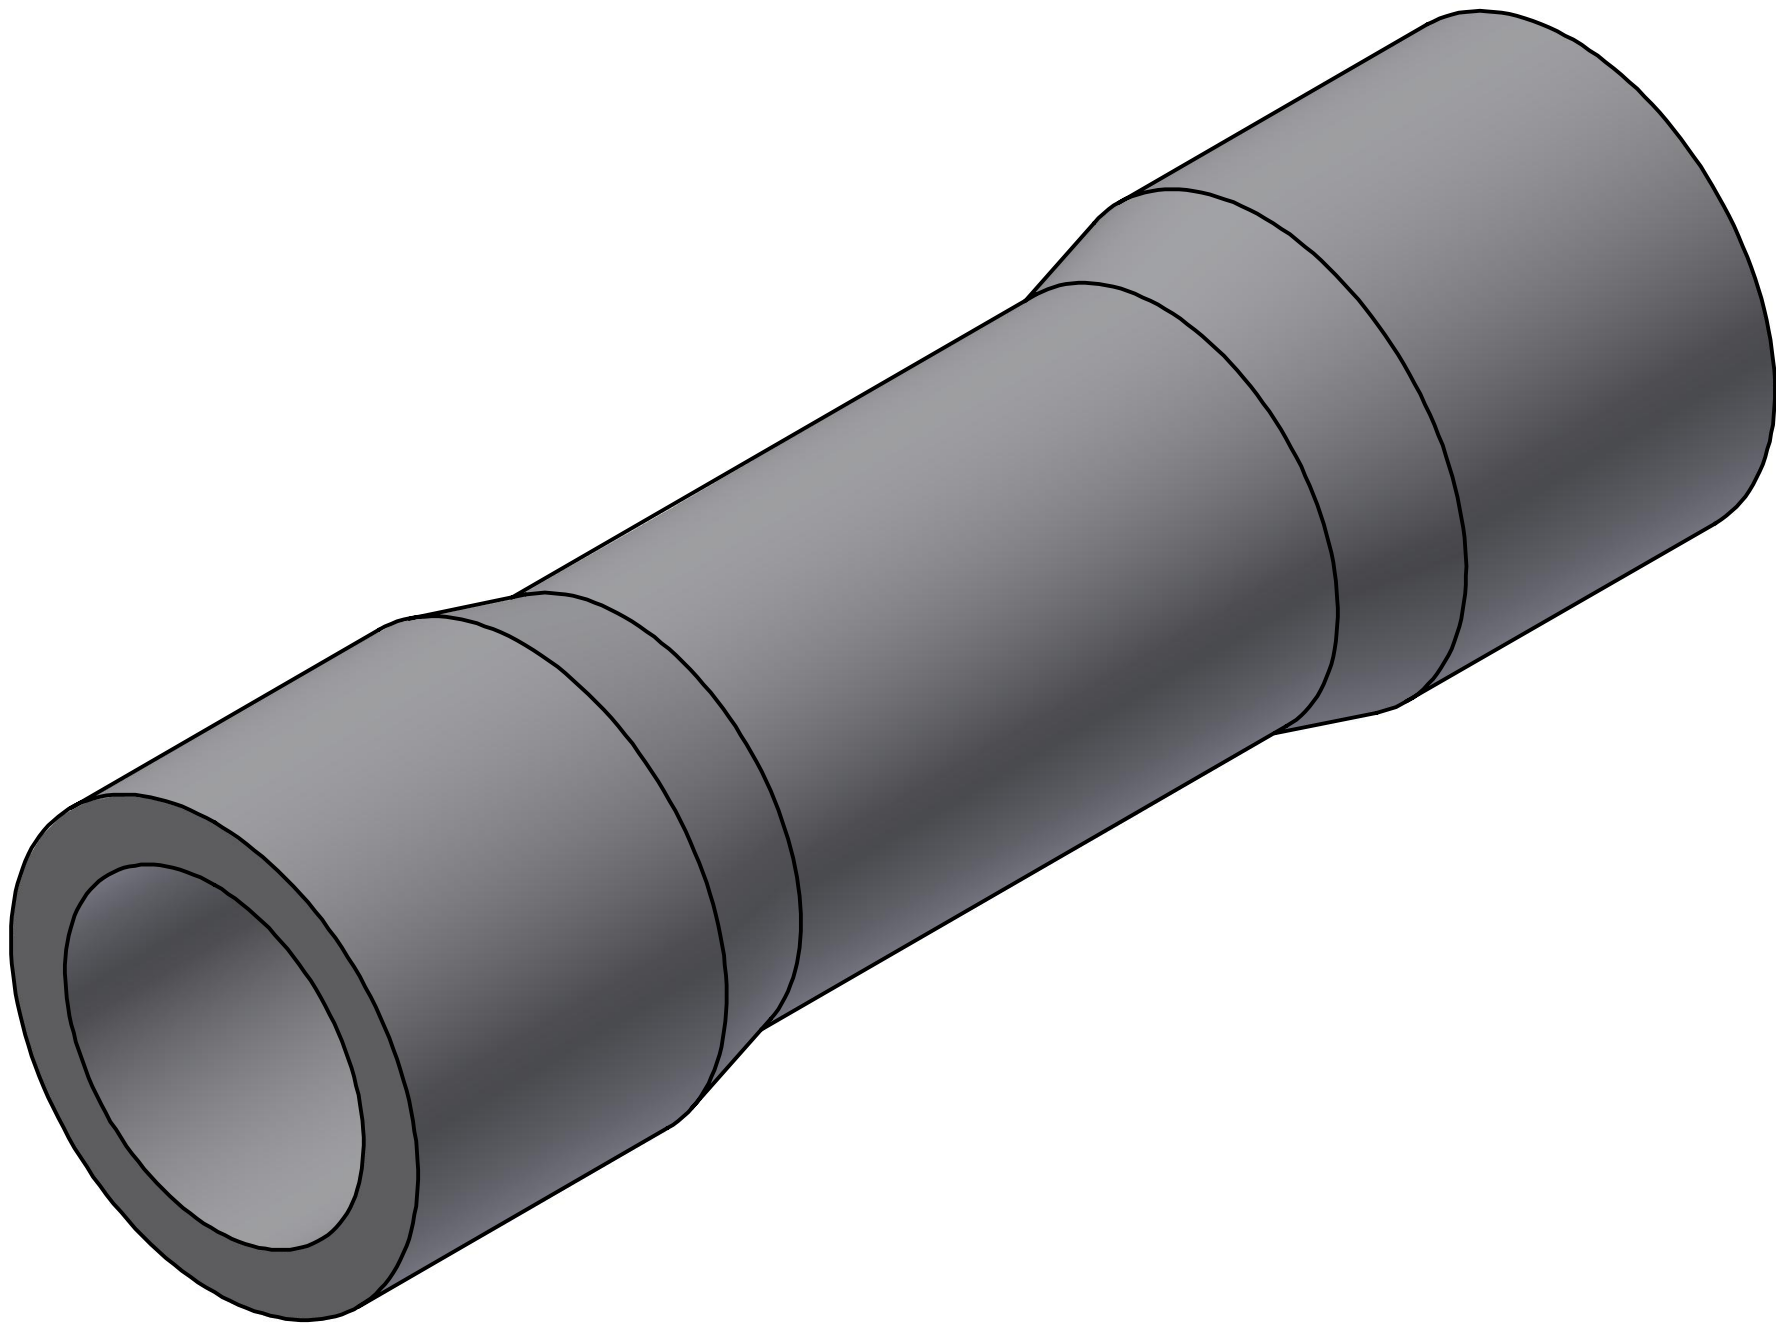


AWG WIRE SIZE (METRIC SIZE)	CATALOG NUMBER	BULK CATALOG NUMBER	L MAX.	MAX. WIRE INSUL. DIA. ACCOM.	WIRE STRIP LENGTH ± .03 [± .8]	COLOR CODE	INSTALLATION TOOLING
22-16 Str. and Sol. (0.34 mm² - 1.00 mm²)	SP16	BS16	1.00 [25.4]	.15 [3.8]	1/4" [6.4]	RED	MR15
16-14 Str. and Sol. (1.50 mm²)	SP14	BS14		.18 [4.6]		BLUE	
12-10 Str. (4.00 mm²)	SP10	BS10	1.23 [31.2]	.26 [6.6]	21/64" [8.3]	YELLOW	

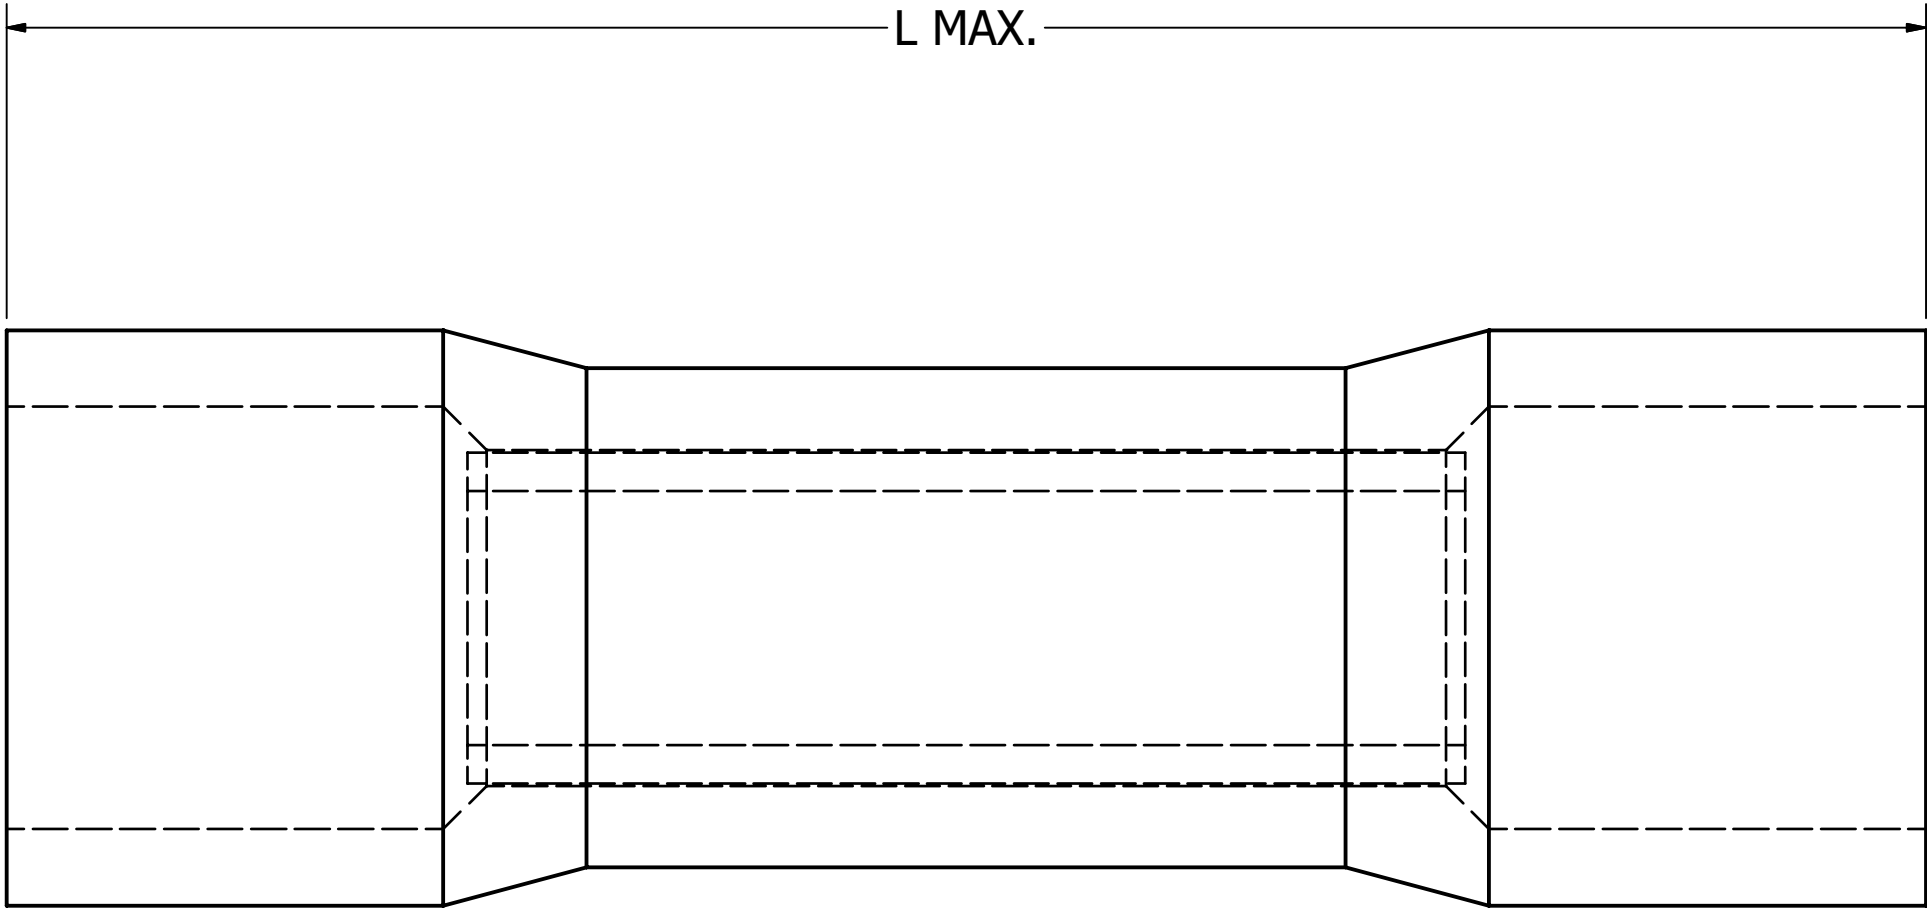

NOTES:

1. TERMINAL: TIN PLATED COPPER

2. INSULATION: POLYVINYLCHLORIDE

3. DIMENSIONS IN BRACKETS [] ARE IN MILLIMETERS AND ARE FOR REFERENCE ONLY.

4. UL LISTED & CSA CERTIFIED SPLICING WIRE CONNECTORS PER UL486C (FILE E9498) & CSA C22.2 NO.188 REQUIREMENTS (FILE 252405)

5. DISCONTINUED TOOLS: MR889, MR8891, Y1022HYTOOL
CONTACT TECH SERVICE FOR INFORMATION ABOUT APPROVED APPLICATIONS (1-800-451-4956)

6. WIRE CONNECTOR:
600V MAXIMUM
BUILDING WIRE: 1000V MAXIMUM, SIGNS OR LUMINARIES
TEMPERATURE RATING OF INSULATING MATERIAL 105°C
FLAME RATING: UL94 V-0

REV	DATE	DESCRIPTION	ECO	BY	C'H'K.
C	08/28/2024	UPDATED TABLE AS PER MARKUP	240822041955	RA	YR

TO ORDER BURNDY® PRODUCTS CALL		VINYLINK™			
UNITED STATES 1-800-346-4175 (LONDONDERRY, NH) CANADA: 1-800-361-6975 (QUEBEC) 1-800-387-6487 (ALL OTHER PROVINCES) FOR PRODUCT INFO: http://www.burndy.com		ITEM NO: N/A			
		CAT. NO: TYPE SP			
		DRAWN BY: RBABU		12/3/2018	
		CHECKER: V.SAKTHIVEL		12/3/2018	
		DSN APRVL: K.CASTONGUAY		12/18/2018	
		MFG APRVL: --			
		QA APRVL: B.POST		12/6/2018	
		MKT APRVL: M.BAILLY		12/6/2018	
		PROD FAM: --			
		PROJECT #: --		SIZE	
		DOCUMENT TYPE: SALES		D	
		REL LEVEL: Released			
				DRAWING NO	
		50094190		C	
		SHEET 1 OF 1			