



Southwire™

TOOLS & EQUIPMENT

LIGHTING SOLUTIONS CATALOG



**[BUILT FOR DURABILITY.
BUILT FOR RELIABILITY.
BUILT FOR WORK.™]**

SOUTHWIRETOOLS.COM

OUR STORY

For over 60 years, Southwire has provided high quality electrical wire and cable to the commercial and industrial construction industries. Now, the name you trust provides durable, cutting-edge professional grade tools, designed with safety and productivity in mind. Look to Southwire® for solutions to all your electrical needs, from electrician's hand tools, meters, contractor equipment, temporary power, and extension cords.

TABLE OF CONTENTS

SOUTHWIRE™ LIGHTING

Area Lights.....	3
Overhead Lights.....	9
String Lights	21
Cart Lights	28
Work Lights.....	31
Personal Lighting.....	41
Clamps & Trouble Lights	44
Installed Lighting	47
Hazardous Location	50

AREA LIGHTS

- LED Wobblelights®
- Metal Halide Wobblelights®
- Halogen Wobblelights®
- Fluorescent Wobblelights®
- Wobblelights® Accessories & Replacement Bulbs
- 120V LED Area Lights
- 360° Tower Light
- 360° Jobsite Lantern
- Balloon Light



AREA LIGHTS



For 20 years the Wobblelight has been providing reliable lighting to the job site. The self-righting design paired with the heavy duty housing guarantees these products will give years of service in even the toughest environments.

360° OF LIGHT

INTEGRATED HANDLE

DURABLE RESIN HOUSING

COVERED PLUG

SELF RIGHTING BASE



WOBBLELIGHT®

AREA LIGHTS

LED WOBBLELIGHT®



111301LED

- 120V
- 5,000 K color temperature
- Operating temp: -40° to 125° F
- 5-15 plug

SPECIFICATIONS



MODEL #	DESCRIPTION	BODY STYLE	WATTS	LAMP LIFE	LINKABLE UNITS	AMP DRAW	CORD TYPE	IP RATING	WEIGHT
111206	9,000 lumen 27" LED Wobblelight	27"	80W	35,000 Hr.	-	0.7A	5' 18/2 SJTW	-	14 lbs
111301LED	12,000 lumen 32" LED Wobblelight	32"	150W	50,000 Hr.	6 Max	1.25A	5' 16/3 SJOOW	IP54	31 lbs
111303LED	15,000 lumen 32" LED Wobblelight	32"	220W	50,000 Hr.	-	1.8A	5' 16/3 SJOOW	IP55	31 lbs

METAL WOBBLELIGHT®



111104PS

- 120V
- 4,000 K color temperature
- Operating temp: -40° to 125° F
- Built in 5-15 plug + receptacle (no cord included)
- Assembled in USA

SPECIFICATIONS



MODEL #	DESCRIPTION	BODY STYLE	WATTS	LAMP LIFE	LINKABLE UNITS	AMP DRAW	CORD TYPE	IP RATING	WEIGHT
111104PS	40,000 lumen 36" Metal Halide Wobblelight	36"	400W	20,000 Hr.	3 Max	4A	-	-	33 lbs
111302	8,000 lumen 36" Halogen Wobblelight	36"	500W	2,000 Hr.	2 Max	4.5A	-	-	28 lbs

FLUORESCENT WOBBLELIGHT®



111205

- 120V
- 2,700K color temperature
- Operating temp: 20° to 120° F
- Includes 5ft cord and 5-15 plug

SPECIFICATIONS



MODEL #	DESCRIPTION	BODY STYLE	WATTS	LAMP LIFE	LINKABLE UNITS	AMP DRAW	CORD TYPE	IP RATING	WEIGHT
111205	5,000 lumen 27" Fluorescent Wobblelight	27"	85W	8,000 Hr.	-	0.7A	18/2 SJTW	-	13.5 lbs

WOBBLELIGHT®

AREA LIGHTS


WOBBLELIGHT® ACCESSORIES AND REPLACEMENT BULBS

SPECIFICATIONS

MODEL #	DESCRIPTION	WORKS WITH
111980JR	9,000 Lumen LED Bulb	11206
111908	85W Fluorescent Bulb	11205
111904	500W Halogen Bulb	111302
111901	175W Metal Halide Bulb	111102
111903	400W Metal Halide Bulb	111104
111807	Nylon Reflector Shield	111203, 111204, 111205, 111206
111808	Nylon Reflector Shield	111301LED, 111303LED, 111302, 111102, 111104
111801	Replacement Reflector Dome and Cap	111302, 111102, 111104
1113186	Replacement Reflector Dome and Cap	111301LED, 111303LED
65151701	Replacement Dome and Cap	111205, 111206

*ADDITIONAL INTERNAL REPLACEMENT PARTS AVAILABLE

WOBBLELIGHT® 360° LIGHT DISTANCE

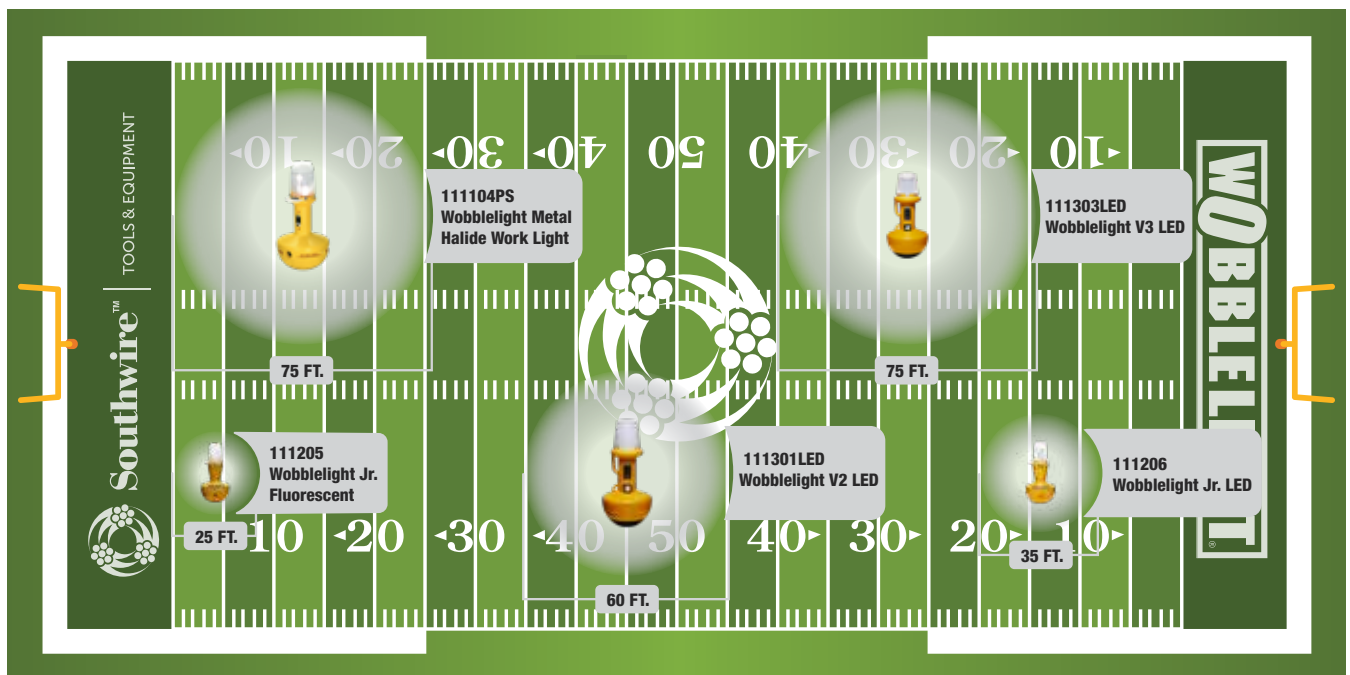

WOBBLELIGHT®

AREA LIGHTS

120W 360° TOWER LIGHT



111508

- 5,000 K color temperature
- Integrated cord
- 360° and 180° illumination
- 7,500 and 15,000 lumen range

SPECIFICATIONS



MODEL #	DESCRIPTION	LIGHT TEMPERATURE	IP RATING	WATTS	CORD	FEATURES
111508	15,000 Lumens ProLight™ 360° LED Light Kit	5,000K	IP65	120W	5' - 18/3 SJTW Cord	Included: Floor Stand Tripod Mount, Hook, Two Earth Magnets
111509	15,000 Lumens ProLight™ 360° LED Light Kit with Tripod	5,000K	IP65	120W	5' - 18/3 SJTW Cord	Included: Floor Stand Tripod Mount, Hook, Two Earth Magnets Heavy Duty Tripod
TLU-100	12,000 Lumen LED Lanterns		--	100W	10' Cord	Included: Hook, Magnet, Tripod Adapter, and Paint Shield

PROLIGHT™ 360° KIT FEATURES (111508 & 111509)



HOOK



EARTH MAGNETS



TRIPOD



STAND

78W 360° TOWER LIGHT



CLM78LED

- 180-verticle degrees of light
- 7' Steel stand. 2 stage
- 19" diameter tripod footprint
- 120V

SPECIFICATIONS



MODEL #	DESCRIPTION	BODY STYLE	WATTS	IP RATING
CLM78LED	9,750 Lumens, 360 Degree Tripod Light	Tripod	78	IP65
TLU-100*	12,000 Lumens, 360 Degree Tripod Light	Tripod	100	IP64

*Includes Hook, magnet, and paint sheild.

360° LED LIGHTS

AREA LIGHTS

360° JOBSITE LANTERN



T50060W

- Daisy-chainable
- 5,000 K color temperature
- Floor stand included
- IP64
- Includes hanging hook

SPECIFICATIONS

MODEL #	DESCRIPTION	BODY STYLE	WATTS	AMPS	IP RATING
T50060W	6,300 Lumen Jobsite LED Lantern on H-Stand	H-Stand	60	0.5	IP64



BALLOON LIGHT



9822

- Soft diffused, glare free light
- Illuminates 11,000 sq. ft.
- Rated for wet location
- Collapsible flame retardant fabric balloon and 9' tripod
- 15' 16/3 SJTOW cord with 5-15 plug with in-line switch
- 125V

SPECIFICATIONS

MODEL #	DESCRIPTION	BODY STYLE	WATTS	AMPS
9822	24,000 Lumen LED Balloon Light	Tripod	200	1.62



360° LED LIGHTS

OVERHEAD JOBSITE LIGHTING

- T5 & T6 Series Integrated LED OverHead Lights
- CL Series First & Second Gen Integrated LED OverHead Lights
- Ready2Hang™ Lighting Program
- Custom Light Fixture
- Temporary LED Cage Lights
- Temporary Fluorescent Cage Lights
- Mini Temporary Cage Lights
- Direct Wire Box Mounted Temporary Lights
- Replacement Bulbs
- Hanging Accessories
- Cage Light Accessories




OVERHEAD JOBSITE LIGHTING

LIGHTING DISTRIBUTION SOLUTIONS

Southwire has a wide range of overhead jobsite light fixtures with various optical distribution features to meet every job site need.

THE LONG NECK SERIES

OPTICAL ADVANTAGE: Focus light down
USE CASE: Large open spaces to efficiently achieve minimum OSHA illumination requirements of 5 foot candles

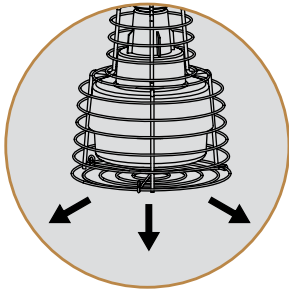

INTEGRAL HOOK FOR EASY HANGING

INTEGRATED RECEPTACLE

REPLACEABLE BULB


PROTECTIVE CAGE



1110120ECO

T60 SERIES

OPTICAL ADVANTAGE: Distributes light in all directions
WHY: General purpose lights where wall illumination or ceiling work may be important

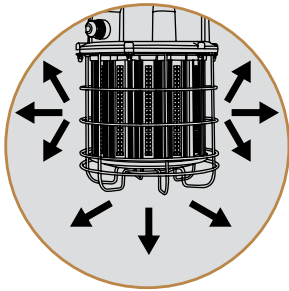

INTEGRAL HOOK FOR EASY HANGING

DAISY CHAINABLE CORDS WITH LENGTH OPTIONS

INTEGRAL LEDS


PROTECTIVE CAGE



T60100

CL SERIES

OPTICAL ADVANTAGE: Broad distribution of light but delivers more light to the ground.
WHY: General purpose scenarios where efficient ground illumination is also a priority.

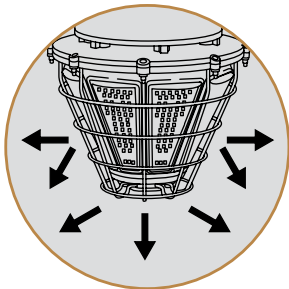

INTEGRAL HOOK FOR EASY HANGING

DAISY CHAINABLE CORDS WITH LENGTH OPTIONS

ANGLED INTEGRAL LEDS



CL100LEDG2

360° JOBSITE LIGHTS

OVERHEAD JOBSITE LIGHTING

T5 SERIES INTEGRATED LED OVERHEAD LIGHTS



T50078

- 5,000 K
- 120/277V
- Rugged diecast aluminum housing
- 50,000 hour rated LED life
- Damp location rated

SPECIFICATIONS



MODEL #	DESCRIPTION	WATTS	SQ. FT. COVERAGE AT 5 FC, HUNG AT 15FT	AMP DRAW	FEEDTHROUGH	COLOR
T50078	8,200 Lumen Temporary Low Bay LED Light, 120/277	78W	1,600	0.65	3' - Plug Only	Copper
T50079	8,200 Lumen Temporary Low Bay LED Light, Direct Wire	78W	1,600	0.65	3' - Direct Wire	Copper

T6 SERIES INTEGRATED LED OVERHEAD LIGHTS



T60100

- 16/3 cord
- 5,000 K, 80 CRI
- 50,000 hour rated LED life
- 120/277V
- Integral hook
- Damp location rated

SPECIFICATIONS



MODEL #	DESCRIPTION	WATTS	SQ. FT. COVERAGE AT 5 FC, HUNG AT 15FT	AMP DRAW	MAX LINKABLE UNITS	FEEDTHROUGH	COLOR
T60100	13,000 Lumen Integrated LED Cage Light	100W	2,000	0.83	7	10' - Plug and 1' - Receptacle	Copper
T60100W35	13,000 Lumen Integrated LED Cage Light	100W	2,000	0.83	7	35' - Plug and 1' - Receptacle	Copper
T60150	19,500 Lumen Integrated LED Cage Light	150W	2,646	1.25	5	10' - Plug and 1' - Receptacle	Copper
T60150W45	19,500 Lumen Integrated LED Cage Light	150W	2,646	1.25	5	45' - Plug and 1' - Receptacle	Copper

CL120 SERIES INTEGRATED LED OVERHEAD LIGHTS



CL120LED

- 16/3 cord
- 4,800 K
- 120/277V
- 50,000 hour rated LED life
- Polycarbonate lens cover
- Damp location rated

SPECIFICATIONS



MODEL #	DESCRIPTION	WATTS	SQ. FT. COVERAGE AT 5 FC, HUNG AT 15FT	AMP DRAW	MAX LINKABLE UNITS	FEEDTHROUGH	COLOR
CL120LED	14,000 Lumen Integrated LED Cage Light, Angled LED Panel	120W	2,500	1	7	5' - Plug and receptacle	Yellow
CL120LEDW	14,000 Lumen Integrated LED Cage Light, Angled LED Panel	120W	2,500	1	7	5' - Plug and receptacle	White

360° LED LIGHTS

OVERHEAD JOBSITE LIGHTING

CL SERIES SECOND GEN INTEGRATED LED OVERHEAD LIGHTS



CL100LEDG2

- 16/3 Cord
- 5,000 K
- 120/277V

- 50,000 hour rated LED life
- Polycarbonate lens cover
- Operating temperature:
-20°F (-29°C) to 140 F 60C

- Damp location rated

SPECIFICATIONS



MODEL #	DESCRIPTION	WATTS	SQ. FT. COVERAGE AT 5 FC, HUNG AT 15FT	AMP DRAW	MAX LINKABLE UNITS	FEEDTHROUGH	COLOR
CL60LED	7,200 Lumen Integrated LED Cage Light, Angled LED Panel	60W	1,320	0.5	9	5' - Plug Only	Orange
CL60LEDG2	7,200 Lumen Integrated LED Cage Light, Angled LED Panel	60W	1,320	0.5	9	6' - Plug and 1' - Receptacle	Orange
CL100LEDG2	12,000 Lumen Integrated LED Cage Light, Angled LED Panel	100W	2,000	0.83	7	6' - Plug and 1' - Receptacle	Orange
CL100LEDG2W	12,000 Lumen Integrated LED Cage Light, Angled LED Panel	100W	2,000	0.83	7	6' - Plug and 1' - Receptacle	White
CL100LED	12,00 Lumen Integrated LED Economy Cage Light	100W	2,600	1.25	7	6' - Plug and receptacle	Orange
CLM150LED	19,000 Lumen Integrated LED Cage Light	150W	2,600	1.25	5	5' - Plug and receptacle	Orange

LONGNECK LED TEMP CAGE LIGHT WITH PLUG & RECEPTACLE



1110120ECO

- 5,000 K color temperature
- Operating temperature:
-40° to 125°F
- 14/3 SJTW cord -58"

- Spring loaded hanging clamp
- Replaceable bulb
- Lamp rated 120/277V

SPECIFICATIONS



MODEL #	DESCRIPTION	WATTS	AMP DRAW	MAX LINKABLE UNITS
111080ECO	7,600 Lumen LED Long Neck Cage Light w/Plug and Receptacle	80	0.8	6
1110120ECO	13,500 Lumen LED Long Neck Cage Light w/Plug and Receptacle	120	0.9	4

360° LED LIGHTS

OVERHEAD JOBSITE LIGHTING

METAL HALIDE & FLUORESCENT CAGE LIGHTS



111400PS

111105F

- Damp location
- 4,000 K Color temperature
- 5-15 plug with 14/3 SJTW cord - 60"

SPECIFICATIONS



MODEL #	DESCRIPTION	WATTS	LAMP LIFE	AMP DRAW	LINKABLE UNITS	TEMP. RATED
111105F	6,900 Lumen Temporary Fluorescent Cage Light	105	10,000 hr.	0.87	6	5 to 125 F
111400PS	42,000 Lumen Temporary Metal Halide Cage Light	400	20,000 hr.	4	Modifiable	-30 to 120 F

WET LOCATION, IP65 HANGING LIGHTS



111084

- 6" rare earth magnet or eye hooks
- No exposed glass
- 120V
- 10 lbs
- 5-15 plug with 14/3 SJTW cord - 60"

SPECIFICATIONS



MODEL #	DESCRIPTION	WATTS	LAMP LIFE	AMP DRAW	COLOR TEMP	TEMP. RATED
111084	6,400 Lumen Temporary Fluorescent Wet Location Light	84W	20,000 hr.	0.76	3,5000K	5 to 125 F
111085	6,000 Lumen Temporary LED Wet Location Light	60W	40,000 HRS	0.54	5,000K	-30 to 120 F

HANGING LIGHT

OVERHEAD JOBSITE LIGHTING

JOBSITE OVERHEAD LIGHTING LAYOUT SERVICES

OSHA standard 1926.56(a) requires a job site have 5 foot candles of light on the ground. Southwire can help you with your lighting layout to ensure that you keep your crew safe without overspending on unnecessary lights.

Contact your Southwire sales associate for more information about Southwire's Lighting Layout Tool
EMAIL: LIGHTINGSUPPORT@SOUTHWIRE.ONMICROSOFT.COM

- Keep your jobsite safe with the right amount of light
- Avoid over lighting a space and increasing install time
- Reduce your material spend



LET SOUTHWIRE LAYOUT YOUR JOBSITE LIGHTING

WHAT WE NEED FROM YOU

- **PROJECT DIMENSIONS:** Length x Width x Deck Height
- **REQUESTED FOOT CANDLE LEVEL:** How many foot candles do you need on your project?
- **WE CAN USE YOUR DRAWINGS TO CALCULATE JOBSITE DIMENSIONS:** Either .PDF or .IFC files

LIGHTING LAYOUT SERVICES

OVERHEAD JOBSITE LIGHTING

READY2HANG LIGHTING PROGRAM

INCREASE YOUR LIGHTING INSTALL EFFICIENCY

By reducing install time with Southwire's Ready2Hang Lighting Program.



PRE ASSEMBLED



SHIPPED COMPLETE TO YOUR JOBSITE



READY TO HANG ON YOUR JOBSITE

PROGRAM DETAILS

**Order minimum: 50+ pieces*

SERVICES INCLUDES

- The Ready2Hang service does not extend lead times
- LED bulbs come fully installed to save you time
- Assembled fixtures are removed from cardboard boxes
- Safely shipped in easily removed bubble wrap packing



REDUCE JOBSITE WASTE & CLEAN UP TIME WITH MINIMAL PRODUCT PACKAGING



ELIMINATE LIGHT FIXTURE ASSEMBLY TIME



INCREASE INSTALL SPEED WITH CUSTOM LIGHT FIXTURES

PRE-ASSEMBLED



WRAPPED



PACKAGE



UNPACK



UNWRAP



INSTALL

READY2HANG

OVERHEAD JOBSITE LIGHTING

CUSTOM LIGHT FIXTURE

CREATE THE PERFECT OVERHEAD LIGHT TO FIT YOUR LIGHTING NEEDS.

Job sites are complex and having the right product at the right time can save you time and money. Garvin custom light fixtures can be designed specifically for your job.



LUMENS

- 5,200
- 7,800
- 10,400
- 13,000
- 15,600
- 19,500
- 28,000

CORD GAUGE

- 16
- 14
- 12

CORD LENGTH

- 6 ft.
- 10 ft.
- Other _____



**NEMA
5-15P**



**NEMA
L5-15P**



**NEMA
L7-15P**

MALE CORD END	FEMALE CORD END
none	none
515P-120V 15A 3 PRONG STRAIGHT BLADE	515P-120V 15A 3 PRONG STRAIGHT BLADE
L515-120V 15A TWIST LOCK	L515-120V 15A TWIST LOCK
L520-120V 20A TWIST LOCK	L520-120V 20A TWIST LOCK
L715-277V 15A TWIST LOCK	L715-277V 15A TWIST LOCK



CUSTOM LIGHTING

OVERHEAD JOBSITE LIGHTING

TEMPORARY LED CAGE LIGHTS

- 6,500K color temperature
- 50,000 hour bulb life
- Replaceable bulbs



TL40LEDW




TL100LEDWS



TL200LEDWTL

SPECIFICATIONS



MODEL #	DESCRIPTION	CORD	WATTS	VOLTS
TL40LED	5,200 Lumen Cage Light w/ medium base LED Corncob Bulb	None	40W	120-277V
TL40LEDW		6' w/ 5-15P Plug	40W	120V
TL40LEDWS		6' Direct Wire	40W	120-277V
TL40LEDWTL		6' w/ L7-15P Twist Lock Plug	40W	277V
TL40LEDPT		1' Cord w/ 5-15P Plug and 1' Cord w/ 5-15R Receptacle	40W	120V
TL60LED	7,800 Lumen Cage Light w/ medium base LED Corncob Bulb	None	60W	120-277V
TL60LEDW		6' w/ 5-15P Plug	60W	120V
TL60LEDWS		6' Direct Wire	60W	120-277V
TL60LEDWTL		6' w/ L7-15P Twist Lock Plug	60W	277V
TL60LEDPT		1' Cord w/ 5-15P Plug and 1' Cord w/ 5-15R Receptacle	60W	120V
TL80LED	10,400 Lumen Cage Light w/ LED Corncob Bulb	None	80W	120-277V
TL80LEDW		6' w/ 5-15P Plug	80W	120V
TL80LEDWS		6' Direct Wire	80W	120-277V
TL80LEDWTL		6' w/ L7-15P Twist Lock Plug	80W	277V
TL100LEDW	13,000 Lumen Cage Light w/ mogul base LED Corncob Bulb	6' w/ 5-15P Plug	100W	120V
TL100LEDWS		6' Direct Wire	100W	120-277V
TL100LEDWTL		6' w/ L7-15P Twist Lock Plug	100W	277V
TL100LEDPT		1' Cord w/ 5-15P Plug and 1' Cord w/ 5-15R Receptacle	100W	120V
TL120LED	15,600 Lumen Cage Light w/ mogul base LED Corncob Bulb	None	120W	120-277V
TL120LEDW		6' w/ 5-15P Plug	120W	120V
TL120LEDWS		6' Direct Wire	120W/120-277V	120-277V
TL120LEDWTL		6' w/ L7-15P Twist Lock Plug	120W/277V	277V
TL120LEDPT		1' Cord w/ 5-15P Plug and 1' Cord w/ 5-15R Receptacle	120W/120V	120V
TL150LED	19,500 Lumen Cage Light w/ mogul base LED Corncob Bulb	None	150W	120-277V
TL150LEDW		6' w/ 5-15P Plug	150W	120V
TL150LEDWS		6' Direct Wire	150W	120-277V
TL150LEDWTL		6' w/ L7-15P Twist Lock Plug	150W	277V
TL150LEDPT		1' Cord w/ 5-15P Plug and 1' Cord w/ 5-15R Receptacle	150W	120V
TL200LED	28,000 Lumen Cage Light w/ mogul base LED Corncob Bulb	None	200W	120-277V
TL200LEDW		6' w/ 5-15P Plug	200W	120V
TL200LEDWS		6' Direct Wire	200W	120-277V
TL200LEDWTL		6' w/ L7-15P Twist Lock Plug	200W	277V
TL200LEDPT		1' Cord w/ 5-15P Plug and 1' Cord w/ 5-15R Receptacle	200W	120V

LED CAGE LIGHTS

OVERHEAD JOBSITE LIGHTING

TEMPORARY FLUORESCENT CAGE LIGHTS



TL105CFPT

- 105W
- 8,000 hour bulb life
- Mounting hook & steel cage

SPECIFICATIONS



MODEL #	DESCRIPTION	CORD END	VOLTS	BULB BASE
TL105CF	6,400 Lumen, 105W Fluorescent Temporary Light	None	120V	Medium
TL105CFW		6' w/ 5-15P Plug	120V	Medium
TL105CFWS		6' Direct Wire	120V	Medium
TL105CFPT		1' cord w/ 5-15P Plug and 1' cord w/ 5-15R Receptacle	277V	Mogul
TL105CF277		None	277V	Mogul
TL105CF277W		6' w/ 5-15P Plug	277V	Mogul
TL105CF277WS		6' Direct Wire	277V	Mogul

MINI TEMPORARY CAGE LIGHTS



TLM

- Steel cage
- Medium base

SPECIFICATIONS



MODEL #	DESCRIPTION	CORD	VOLTS
TLM	Mini Temporary Cage Lights	None	120V - 277V
TLMW		6' w/ 5-15P Plug	120V
TLMPT		6' Direct Wire	120V
TLMAGW		1' cord w/ 5-15P Plug and 1' cord w/ 5-15R Receptacle	277V

DIRECT WIRE BOX MOUNTED TEMPORARY LIGHTS



TLCO

- Steel cage
- Medium bulb base
- Includes mounting plates for square and round boxes
- Direct wire

SPECIFICATIONS



MODEL #	DESCRIPTION	BULB
TLCO	1,000 Lumen Box Mount Temp Cage Light	9W
TLMU	Box Mount Wall Sconce Temp Cage Light	----

LED CAGE LIGHTS

OVERHEAD JOBSITE LIGHTING

REPLACEMENT BULBS



LED100

- 6,500 K color temperature
- LED bulbs are IP64

SPECIFICATIONS



MODEL #	DESCRIPTION	WATTS/ VOLTS	BULB LIFE	BULB BASE
C105651MED	6,400 Lumen, Fluorescent Bulb	105W/120V	8,000 Hr.	Medium
C105652MOG	6,400 Lumen, Fluorescent Bulb	105W/277V	8,000 Hr.	Mogul
LED40	5,200 Lumen, LED Corncob Bulb	40W/120V-277V	50,000 Hr.	Medium
LED60	7,800 Lumen, LED Corncob Bulb	60W/120V-277V	50,000 Hr.	Medium
LED80	10,400 Lumen, LED Corncob Bulb	80W/120V-277V	50,000 Hr.	Mogul
LED100	13,000 Lumen, LED Corncob Bulb	100W/120V-277V	50,000 Hr.	Mogul
LED120	15,600 Lumen, LED Corncob Bulb	120W/120V-277V	50,000 Hr.	Mogul
LED150	19,500 Lumen, LED Corncob Bulb	120W/120V-277V	50,000 Hr.	Mogul
LED200	28,000 Lumen, LED Corncob Bulb	200W/120V-277V	50,000 Hr.	Mogul

HANGING ACCESSORIES



SC5075HF



CPMH1



JC-100



JHK-32MAG



JHK-64



BRM200-HD

SPECIFICATIONS

MODEL #	DESCRIPTION	FUNCTION
SC-5075HF	4" Square Swivel Fixture Hanger Ring, with Hands Free Door	Provides a threaded mounting point for the fixture hook and convenient hands free door for direct wire applications
SC-507HFR	4" Round Swivel Fixture Hanger Ring, with Hands Free Door	Provides a threaded mounting point for the fixture hook and convenient hands free door for direct wire applications
SC-507511BHF	4-11/16" Round Swivel Fixture Hanger Ring, with Hands Free Door	Provides a threaded mounting point for the fixture hook and convenient hands free door for direct wire applications
CPMH1	Cage Light Fixture Hook with Threaded End	Pairs with swivel fixture hangers to provide a hanging surface for the light
JC-100	Zinc Fixture Support #12, 100'	Support light fixtures
JHK-32MAG	2" J Hook with 90 lb. Magnet	Supporting and managing string light or extension cord cables
JHK-64	2" J Hook with Mounting Hole	Supporting and managing string light or extension cord cables
JHK-32-AB	2" J Hook with Angled Bracket with Mounting Hole	Supporting and managing string light or extension cord cables
BRM200-HD	2" Bridal Rign with 90 lb. magnet	Supporting and managing string light or extension cord cables
	Security Lock	When used with chain can secure the light fixture to help prevent theft.
58299040	14" Reusable Cable Ties, Black, 15 Pack	Manage cables and hang small fixtures
58298740	14" Reusable Cable Ties, Black, 100 Pack	Manage cables and hang small fixtures

BULBS & ACCESSORIES

OVERHEAD JOBSITE LIGHTING

CAGE LIGHT ACCESSORIES



TLPS

SPECIFICATIONS

MODEL #	DESCRIPTION
TLPS	Light Pollution Shield, 13" (Works with Medium Base Fixtures)
TLPS-L	Light Pollution Shield, 15" (Works with Mogul Base Fixtures)
TLSGLK	Temp Light Lockable Acrylic Guard

STRING LIGHTS

- LED String Light with Up-Light
- LED String Lights With Magnetic Yolk
- LED String Lights With Replaceable Light Panels
- Standard Plastic String Lights
- Standard Metal String Lights
- String Lights with LED Bulbs
- Standard Locking String Lights
- String Lights Replacement Parts
- String Light Hanging Accessories



STRING LIGHTS

LED STRING LIGHTS WITH UP-LIGHT

Shine light along hundreds of feet with the ease utilizing these convenient and easy to install integrated LED string lights. With no bulb to break or replace, these products are low profile and will provide service for years.

**50' AND 100'
MODELS AVAILABLE**



DAISY CHAIN UP TO 1000'

**NO BULBS -
700 LUMEN DOWN LIGHT**



IP65 HEAD

DURABLE CONSTRUCTION

**100 LUMEN UPLIGHT ILLUMINATES
CEILING TASKS LIKE CONDUIT AND
STRUT WORK**



UP-LIGHT STRING LIGHTS

STRING LIGHTS

LED STRING LIGHT WITH REPLACEABLE HEADS

We know that string lights get beat up, trashed, covered in paint or other chemicals, and cables cut. Replaceable head string lights help you stay up and running on the job site with quick easy replacement of light heads or salvaging of parts for future jobs.

**RATED FOR 50,000 HOUR
LED LIFE (24/7 FOR 6 YEARS)**

**100 LUMEN UPLIGHT ILLUMINATES
CEILING TASKS LIKE CONDUIT AND
STRUT WORK**



E17 BASE

**REPLACEABLE HEAD ALLOWS FOR
CHANGE-OUT IF DAMAGED, OR TO
SALVAGE PARTS IF A CABLE IS CUT**



REPLACEABLE HEAD

STRING LIGHTS

LED STRING LIGHTS WITH UP-LIGHT



7164SW

- 5,000 K light color temperature
- IP65 heads
- 800 lumens per head
- 100 lumen up-light, 700 lumen down light
- 5-15 plug and receptacle
- Mounting hole molded into top housing

SPECIFICATIONS

MODEL #	DESCRIPTION	LENGTH	CORD TYPE	HEAD COUNT	LINKABLE UNITS
7164SW	50' - 14/3, 4,000 Lumen, LED String Light	50'	14/3 SJTW	5	1,000 Ft.
7165SW	100' - 14/3, 8,000 Lumen, LED String Light	100'	14/3 SJTW	10	1,000 Ft.



LED STRING LIGHTS WITH MAGNETIC YOLK



- 5,600 K color temperature
- Adjustable yolk for directing light
- 1,140 lumens per head
- Impact resistant polycarbonate lens
- 1-15 plug and receptacle with slide lock feature
- 50,000 hour fixture life
- 30 lbs. magnet on each yolk for quick mounting

SPECIFICATIONS

MODEL #	DESCRIPTION	LENGTH	CORD TYPE	HEAD COUNT	LINKABLE UNITS
91135	50' - 18/2, 5,700 Lumen LED String Light	50'	18/2 SJTW	5	500 Ft.
91120	20' - 18/2, 1,140 Lumen LED String Light	20'	18/2 SJTW	1	500 Ft.



LED STRING LIGHTS WITH REPLACEABLE LIGHT PANELS



97132

- 5,600 K color temperature
- Removable light panel with E17 base
- 900 lumens per head
- 1-15 plug and receptacle with slide lock feature
- 50,000 hour fixture life
- Impact resistant polycarbonate lens

SPECIFICATIONS

MODEL #	DESCRIPTION	LENGTH	CORD TYPE	HEAD COUNT	LINKABLE UNITS
97120	20' - 18/2 STW, 900 Lumen LED String Light	20'	SJTW	1	500 Ft.
97135	50' - 18/2 STW, 4,500 Lumen LED String Light	50'	SJTW	5	500 Ft.
97132	100' - 18/2 STW, 9,000 Lumen LED String Light	100'	SJTW	10	500 Ft.



STRING LIGHTS

STANDARD PLASTIC STRING LIGHTS



7145SW

- Medium base socket
- Integrated plug and receptacle
- Sockets rated to 150W
- NEC compliant
- Meets OSHA requirements



SPECIFICATIONS

MODEL #	DESCRIPTION	JACKET	CORD TYPE	CAGE TYPE	LENGTH	PLUG & RECEPTACLE	SOCKET COUNT	
7145SW	100' 14/2 SJTW String Light, Plastic Cages	SJTW	14/2	Plastic	100 ft.	1-15	10	
7155SW	100' 14/3 SJTW String Light, Plastic Cages			Plastic	100 ft.	5-15	10	
7548SW	50' 12/3 SJTW String Light, Plastic Cages			Plastic	12/3	50 ft.	5-15	5
7549SW	100' 12/3 SJTW String Light, Plastic Cages					100 ft.	5-15	10
96132	100' 12/3 SJTW String Light, Plastic Cages					Pre-Assembled Plastic	100 ft.	5-15
94132	100' 14/2 STW String Light, Plastic Cages			STW	14/2	Pre-Assembled Plastic	100 ft.	1-15
7146SW	100' 12/2 STW String Light, Plastic Cages	Plastic	100 ft.			1-15	10	
95135	50' 12/3 STW String Light, Plastic Cages	Pre-Assembled Plastic	50 ft.			5-15	5	
95132	100' 12/3 STW String Light, Plastic Cages	Pre-Assembled Plastic	100 ft.			5-15	10	

STANDARD METAL STRING LIGHTS



7539SW

- Medium base socket
- Integrated plug and receptacle
- Sockets rated to 150W
- NEC compliant
- Meets OSHA requirements



SPECIFICATIONS

MODEL #	DESCRIPTION	JACKET	CORD TYPE	CAGE TYPE	LENGTH	PLUG & RECEPTACLE	SOCKET COUNT
7538SW	50' 12/3 SJTW String Light, Metal Cages	SJTW	12/3	Metal	50 ft.	5-15	5
7539SW	100' 12/3 SJTW String Light, Metal Cages			Metal	100 ft.	5-15	10
7599SW	100' 12/3 STW String Light, Metal Cages	STW		Metal	100 ft.	5-15	10
95137	50' 12/3 STW String Light, Metal Cages			Pre-Assembled Metal	50 ft.	5-15	5
95133	100' 12/3 STW String Light, Metal Cages			Pre-Assembled Plastic	100 ft.	5-15	10

STANDARD STRING LIGHTS

STRING LIGHTS

STRING LIGHTS WITH LED BULBS



121050

- Medium base socket
- Integrated plug
- Rough service LED bulb
- 5,000 K color temperature
- NEC compliant
- Meets OSHA requirements

SPECIFICATIONS



MODEL #	DESCRIPTION	JACKET	CORD TYPE	CAGE TYPE	LENGTH	PLUG & RECEPTACLE	BULB LUMENS	SOCKET COUNT
SLP142J100K80	100' 14/2 SJTW String Light with 800 Lumen Bulb, Plastic Cages	SJTW	14/2	Plastic	100 ft.	1-15 Plug Only	800	10
SLP143J100K80	100' 14/3 SJTW String Light with 800 Lumen Bulb, Plastic Cages		14/3	Plastic	100 ft.	5-15	800	10
1111000	100' 14/2 SJTW String Light with 1,500 Lumen Bulb, Plastic Cages		14/2	Plastic	100 ft.	1-15 Plug Only	1,500	10
1311000	100' 14/3 SJTW String Light with 1,500 Lumen Bulb, Plastic Cages		14/3	Plastic	100 ft.	5-15	1,500	10
121050	50' 12/3 STW String Light with 1,500 Lumen Bulb, Plastic Cages	STW	12/3	Metal	50 ft.	5-15	1,500	5
1211000	100' 12/3 STW String Light with 1,500 Lumen Bulb, Plastic Cages			Metal	100 ft.	5-15	1,500	10

STANDARD TWIST-LOCK STRING LIGHTS



SLP123J100L

- Medium base socket
- Integrated plug and receptacle
- L5-20 plug and receptacle
- Sockets rated to 150W

SPECIFICATIONS



MODEL #	DESCRIPTION	JACKET	CORD TYPE	CAGE TYPE	LENGTH	PLUG & RECEPTACLE	SOCKET COUNT
SLP123J50L	50' 12/3 SJTW Locking String Light, Plastic Cages	SJTW	12/3	Plastic	50 ft.	L5-20	5
96125*	50' 12/3 SJTW Locking String Light, Plastic Cages			Plastic	50 ft.	L5-20	5
SLP123J100L	100' 12/3 SJTW Locking String Light, Plastic Cages			Plastic	100 ft.	L5-20	10
96122*	100' 12/3 SJTW Locking String Light, Plastic Cages			Pre-Assembled Plastic	100 ft.	L5-20	10
95125	50' 12/3 SJTW Locking String Light, Plastic Cages	STW		Pre-Assembled Plastic	50 ft.	L5-20	5
95122	100' 12/3 STW Locking String Lights, Plastic Cages			Pre-Assembled Plastic	100 ft.	L5-20	10
95127	50' 12/3 STW Locking String Lights, Metal Cages			Pre-Assembled Plastic	50 ft.	L5-20	5
95123	100' 12/3 STW Locking String Lights, Metal Cages			Pre-Assembled Plastic	100 ft.	L5-20	10

*UL Listed only.

LOCKING STRING LIGHTS

STRING LIGHTS

STRING LIGHTS REPLACEMENT PARTS



23WCFL

SPECIFICATIONS

MODEL #	DESCRIPTION	WORKS WITH
72002000	Metal Replacement Cage	All standard string light models
7301000	Plastic Replacement Cage	All standard string light models
9700	Replacement Magnetic Yolk	91135, 91120
9709	E17 Replacement Light Panel	97120, 97135, 97132
9711	E26 Replacement Light Panel	97132, 97135
5902FR	Incandescent 75W Medium Base Rough Service Bulb	All standard string light models
5903FR	Incandescent 100W Medium Base Rough Service Bulb	All standard string light models
105WCFL	Compact Fluorescent, 105W	All standard string light models
23WCFL	Compact Fluorescent, 23W	All standard string light models
111919	800 Lumen LED Medium Base Bulb	All standard string light models
111923	1,500 Lumen LED Medium Base Bulb	All standard string light models

STRING LIGHT HANGING ACCESSORIES



JHK-32MAG

SPECIFICATIONS

MODEL #	DESCRIPTION	FUNCTIONS
JHK-32MAG	Plastic Replacement Cage	Supporting and managing string light or cables
JHK-64	Metal Replacement Cage	
JHK-32-AB	Replacement Magnetic Yolk	
BRM200-HD	E17 Replacement Light Panel	
58299040	E26 Replacement Light Panel	
58298740	Incandescent 75W Medium Base Rough Service Bulb	

CART LIGHTS

- 7000 Series LED Cart Light
- 9000 Series LED Cart Light
- Metal Halide Cart Light
- Halogen Cart Light
- Replacement Bulbs



CART LIGHTS

7000 SERIES LED CART LIGHT



7322

- 125V
- 12 ft. 18/3 SJTW power cord - 5-15
- Self-breaking wench - 7322

- Adjustable head with protective wire cages
- Steel cart base
- Wet location



SPECIFICATIONS

MODEL #	DESCRIPTION	LUMENS	MAST HEIGHT	HANDLE/MAST STYLE	HEAD COUNT	TOTAL WATTS	AMPS
7309	22,000 Lumen, Single Head, 2 Stage Cart Light	22,000	5 ft. - 10 ft.	2 Stage Mast	1	200W	1.7A
7322	44,000 Lumen, Dual Head, 2 Stage Winch Cart Light	44,000	5.5 ft. - 12 ft.	2 Stage with 600 lbs. Mast	2	400W	2.14A
ACCESSORIES							
7300HA	Replacement Head for 7309	22,000					
7300DHA	Replacement Head for 7322	44,000					

9000 SERIES LED CART LIGHT



9322

- 125V
- 12 ft. 18/3 SJTW power cord - 5-15

- Adjustable head with protective wire cages
- Steel cart base
- Wet location



SPECIFICATIONS

MODEL #	DESCRIPTION	LUMENS	MAST HEIGHT	HANDLE/MAST STYLE	HEAD COUNT	TOTAL WATTS	AMPS
9842	11,000 Lumen, Twin Head, 2 Stage Cart Light	11,000	5 ft. - 10 ft.	2 Stage Mast	2	100W	0.8A
9322	44,000 Lumen, Quad Head, 2 Stage Winch Cart Light	22,000	5.5 ft. - 12 ft.	2 Stage Mast with 600 lbs. Wench	4	200W	1.6A
ACCESSORIES							
9800DHA	Replacement Head for 9842	11,000					
9900DHA	Replacement Head for 9322	22,000					

METAL HALIDE CART LIGHT



5309

- 125V
- 12 ft. 18/3 SJTW power cord - 5-15
- Self-breaking wench - 5322

- Adjustable head with protective wire cages
- Steel cart base
- Wet location



SPECIFICATIONS

MODEL #	DESCRIPTION	MAST HEIGHT	HANDLE/MAST STYLE	HEAD COUNT	TOTAL WATTS	AMPS
5309	1,000W Metal Halide, Single Head, 2 Stage Cart Light	5 ft. - 10 ft.	2 Stage Mast	1	1,000	8
5322	2,000W Metal Halide, Dual Head, 2 Stage Winch Cart Light	5.5 ft. - 12 ft.	2 Stage Mast with 600 lbs. Wench	2	2,000	16
ACCESSORIES						
LH1000MH	Replacement Head for 5309 and 5322					
5010	Replacement Head and Cross Bar for 5309					
5011	Replacement Head and Cross Bar for 5322					

WIRE CAGE CART LIGHTS

CART LIGHTS

HALOGEN CART LIGHT



5742

- Externally Operated On/Off Switch
- 12' 16/3 SJTW power supply cord
- Steel cart base



SPECIFICATIONS

MODEL #	DESCRIPTION	MAST HEIGHT	HANDLE/MAST STYLE	HEAD COUNT	TOTAL WATTS	AMPS
5742	1,000W Heavy Duty Quartz Halogen Cart Light	10'	2 Stage Mast	2	1,000	

REPLACEMENT BULBS



5610

SPECIFICATIONS

MODEL #	DESCRIPTION	WORKS WITH
5940	400W Metal Halide - Probe Start, Type-0	
5940P	400W Metal Halide - Pulse Start, Type-0	
5910	1000W Metal Halide - BT-37 Metal Halide Elliptical	5322
5910C	1000W Metal Halide - BT-37 Metal Halide Conical	Legacy cart lights 5322C & 5309C
L716SW	500W Rough Service Halogen Bulbs	5742
L23SW	500W Rough Service Halogen Bulb 6 pack in Protective Plastic Case	5742

HALOGEN CART LIGHT

WORK LIGHTS

- Slim Series LED Work Light
- Prolight™ XLE Series LED Heavy Duty Work Light
- AL Series Heavy Duty Work Light
- Wing Lights
- 6000 & 9000 Series Heavy Duty LED Work Light
- WL Series LED Work Light
- Rechargeable LED Folding Worklight
- Rechargeable AL Series LED Work Lights
- Rechargeable LED Wing Light
- 6000 Series Rechargeable Light
- Rechargeable Mini & Clamp Work Lights
- High Powered LED Rechargeable Flood Lights
- Prolight™ Slim Extreme LED Flood Light
- Halogen Work Lights & Replacement Bulbs
- Tripods



WORK LIGHTS

RECHARGEABLE FOLDING WORK LIGHT



LIGHT WINGS FOLD TO PROVIDE ILLUMINATION UP TO 360 DEGREES

BATTERY WITH 2 HOUR RUN TIME

BATTERY LIFE INDICATOR AND 2 MODE SETTINGS (2,000 & 4,000 LUMENS)

LIGHT WINGS FOLD OVER TO PROTECT LED LENS WHEN NOT IN USE

RECEPTACLE FOR DAISY CHAINING MULTIPLE LIGHTS

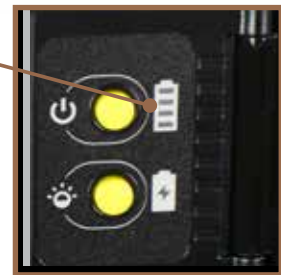

AVAILABLE WITH TRIPOD

RECHARGEABLE WORK LIGHT

WORK LIGHTS

AL SERIES RECHARGEABLE AND CORDED WORK LIGHTS

For the serious tradesman, Southwire's AL series work light is feature rich and built to last



**CORDED 6,000 AND 10,000 LUMEN MODELS
RECHARGEABLE 2,000 AND 6,000 LUMEN MODELS**



**APP ENABLED, CONTROL MULTIPLE LIGHTS
FROM THE SAME APP (AVAILABLE ON THE 6,000
AND 10,000 LUMEN MODELS).**

**USB OUTPUT
FOR CHARGING**



**DIMMING CONTROLS &
BATTERY LEVEL INDICATOR**



TILTING STAND



**DURABLE IP67, SUBMERSIBLE
IN WATER & DROP TESTED
FROM 1 METER**

AL SERIES WORK LIGHTS

WORK LIGHTS

SLIM SERIES LED WORK LIGHT



411050



411350

- Aluminum body
- IP65, indoor or outdoor use
- Operating temp: -40° to 122° F
- 5,000 K LED with 50,000 hr. life
- 120V, 5' - 18/3 SJTW cord

SPECIFICATIONS

MODEL #	DESCRIPTION	LUMENS	WATTS	STAND
411015	1,500 Lumen LED Slim Work Light	1,500	15W	Floor Stand
411215	1,500 Lumen LED Slim Work Light w/ Tripod	1,500	15W	Tripod
411315	3,000 Lumen LED Twin Head Slim Light w/ Tripod	1,500 x2	30W	Tripod
411030	3,000 Lumen LED Slim Work Light	3,000	30W	Floor Stand
411430	3,000 Lumen LED Slim Work Light w/ Magnetic Base	3,000	30W	Magnetic Disc Base
411230	3,000 Lumen LED Slim Work Light w/ Tripod	3,000	30W	Tripod
411330	6,000 Lumen LED Twin Head Slim Light w/ Tripod	3,000 x2	60W	Tripod
411050	5,000 Lumen LED Slim Work Light	5,000	50W	Floor Stand
411450	5,000 Lumen LED Slim Work Light w/ Magnetic Base	5,000	50W	Magnetic Disc Base
411250	5,000 Lumen LED Slim Work Light w/ Tripod	5,000	50W	Tripod
411350	10,000 Lumen LED Twin Head Slim Light w/ Tripod	5,000 x2	100W	Tripod



PROLIGHT™ XLE SERIES LED HEAVY DUTY WORK LIGHT



111500

- IP65 indoor or outdoor use
- Operating temp: -30° to 120° F
- 5,000 K LED with 50,000 hr. life
- Aluminum body, tempered glass, and protective cage
- 120V, 5' - 18/3 SJTW cord

SPECIFICATIONS

MODEL #	DESCRIPTION	LUMENS	WATTS	STAND
111500	6,500 Lumen LED PROLIGHT™ Work Light w/ Floor Stand	6,500	50W	Floor Stand
111505	6,500 Lumen LED PROLIGHT™ Work Light w/ Tripod	6,500	50W	Tripod
111507	6,500 Lumen LED PROLIGHT™ Work Light w/ Magnet	6,500	50W	Magnet
111000	13,000 Lumen LED PROLIGHT™ Twin Head Work Light	6,500 x2	100W	Dual Head w/ Tripod
111005	13,000 Lumen LED PROLIGHT™ Twin Head Work Light w/ Tripod	6,500 x2	100W	Dual Head w/ Tripod



AL SERIES HEAVY DUTY WORK LIGHT



AL100CSW

- IP67 - submersible in water
- Impact resistant die cast housing, drop tested to 1M
- USB Power outlet for charging other devices
- 3 year warranty
- Dimmable
- Bluetooth® Control via app available in Apple and Andoid store
- Dual power system: Can run on charge or while plugged in

SPECIFICATIONS

MODEL #	DESCRIPTION	LUMENS	WATTS	STAND
AL100CSW	10,000 Lumen LED Work Light	10,000	100W	Magnetic Swivel Stand
AL60CSW	6,000 Lumen LED Work Light	6000	60W	Magnetic Swivel Stand



CORDED WORK LIGHTS

WORK LIGHTS

WOODS® WL SERIES LED WORK LIGHT



WL40012

- 4,000 K color temperature
- Rugged die cast aluminum housing
- Quick release tripod with leveling leg

SPECIFICATIONS



MODEL #	DESCRIPTION	LUMENS	HEAD COUNT	WATTS	STAND
WL40012	1000 Lumen Portable Work Light	1000	1	10	H-Stand
WL40024	1500 Lumen Portable Work Light	1500	1	16	H-Stand
WL40036	3000 Lumen Portable Work Light	3000	1	36	H-Stand
WL40048	4000 Lumen Portable Work Light	4000	1	48	H-Stand
WL40072	6000 Lumen Portable Work Light	6000	1	72	H-Stand
WL40072S	6000 Lumen Work Light with Tripod	6000	1	72	H-Stand + Tripod
WL40236S	6000 Lumen Dual Head Work Light with Tripod	3000 x 2	2	72	Sled + Tripod
WL40272S	12,000 Lumen Dual Head Work Light with Tripod	6000 x 2	2	144	Sled + Tripod

9000 SERIES HEAVY DUTY LED WORK LIGHT




9125

- 50,000 Hour rated LED
- 5,000 K color temperature
- 120V
- All steel stand and tripod
- Wet location
- Impact resistant poly carbonate lens
- Replacement lenses available to cover paint and chemical over spray

SPECIFICATIONS



MODEL #	DESCRIPTION	LUMENS	HEAD COUNT	WATTS	STAND
9055	5,500 Lumen LED Roll Cage Work Light	5,500	1	50	Roll Cage
9125	5,500 Lumen LED Floor Stand Work Light	5,500	1	50	Floor Stand & Magnet
9750	5,500 Lumen LED Single Head Work Light on Tripod	5,500	1	50	19" DIA - 2 Stage Tripod
9810	11,000 Lumen LED Dual Head Work Light on Tripod	5,500x2	2	100	30" DIA - 2 Stage Tripod



9810

6000 SERIES LED WORK LIGHT



6125I

- 50,000 Hour rated LED
- 4,000 K color temperature
- 120V
- Wet location
- Impact resistant poly carbonate lens and die cast housing
- All steel stand and tripod

SPECIFICATIONS



MODEL #	DESCRIPTION	LUMENS	HEAD COUNT	WATTS	STAND
6125I	3,500 Lumen H-Stand Work Light	3,500	1	43	H-Stand
6710I	3,500 Lumen Work Light on 6.8' Tripod	3,500x2	2	86	19" DIA - 2 Stage Tripod

STEEL WORK LIGHTS

WORK LIGHTS

WING LIGHTS



5220

- Rotating panel design allows for 180 to 360 degree illumination
- 5,000 K color temperature
- 120V
- All steel stand and tripod
- Wet location
- Impact resistant polycarbonate lens
- Replacement lenses available to cover paint and chemical over spray

SPECIFICATIONS

MODEL #	DESCRIPTION	LUMENS	WATTS	STAND
5220	4,000 Lumen LED Wing Style Work Light on H Stand	4,000	51	H-Stand
5270	4,000 Lumen LED Wing Style Work Light on Tripod			Tripod



RECHARGEABLE LED FOLDING WORK LIGHT



514125

- Integrated lithium ion battery - 7.4V, 800 mAh
- IP65, indoor or outdoor use
- 50,000 hour LED life
- Operating temp: -10° to 125° F
- 5,000 K light temperature

SPECIFICATIONS

MODEL #	DESCRIPTION	ACCESSORIES	LUMENS	WATTS	RUN TIME	RECHARGE TIME
514124	PROLIGHT™ Folding LED Work Light	Wall Charger Car Charger	2,400 LM - High 1,200 LM - Med 800 LM - Low	30W	2.5 Hrs - High 5 Hrs. - Medium 8 Hrs. - Low	4 Hrs.
514125	PROLIGHT™ Folding LED Work Light	Wall Charger Car Charger Tripod				



RECHARGEABLE AL SERIES LED WORK LIGHTS



AL60RSW

- IP67 - submersible in water
- Impact resistant die cast housing, drop tested to 1M
- USB Power outlet for charging other devices
- 3 year warranty
- Dimmable
- Bluetooth® Control via app available in Apple and Android store - AL60RSW only
- Dual power system

SPECIFICATIONS

MODEL #	DESCRIPTION	LUMENS	RUN TIME	WATTS	RECHARGE TIME	STAND
AL20RSW	2,000 Lumen LED Rechargeable Work Light	2,000	2.5 Hr. - 15 Hr.	20	5 Hr.	Magnetic Swivel Stand
AL60RSW	6,000 Lumen LED Rechargeable Work Light	6,000	1 Hr. - 6 Hr.	60	8 Hr.	Swivel Stand



RECHARGEABLE WORK LIGHTS

WORK LIGHTS

RECHARGEABLE LED WING LIGHT



- Rotating panel design allows for 180° to 360° illumination
- High and low output settings
- Battery indicator shows remaining power
- Wet location
- Receptacle on back to allow for daisy chaining more lights or run other small products



SPECIFICATIONS

MODEL #	DESCRIPTION	LUMENS	WATTS	RUN TIME	RECHARGE TIME	STAND
7270	4,000 Lumen LED Wing Style Rechargeable Work Light on Tripod	2,000-4,000	51	2Hr.-4Hr.	6 Hr.	Tripod
7220	4,000 Lumen LED Wing Style Rechargeable Work Light on H-Stand					H-Stand

6000 SERIES RECHARGEABLE LIGHT



- Includes 120V wall charger, USB charger, or 12V vehicle charger
- Heavy duty die cast housing
- 5,200K Color Temperature
- 3 Brightness levels



SPECIFICATIONS

MODEL #	DESCRIPTION	LUMENS	WATTS	RUN TIME	RECHARGE TIME	STAND
6165I	1,500 Lumen Compact Rechargeable Work Light	1,500-500	20	2Hr.-6Hr.	3 Hr.	H-Stand
6175I	2,500 Lumen Rechargeable Work Light	2,500-700	30	2Hr.-6Hr.	3 Hr.	H-Stand

6165I

YELLOW JACKET® RECHARGEABLE MINI WORK LIGHT



- IP65 - weather resistant
- High and low output settings
- Durable metal housing
- 6,500K Color Temperature
- Compact form to easily fit in tool bag
- USB power outlet for charging other devices



SPECIFICATIONS

MODEL #	DESCRIPTION	LUMENS	WATTS	RUN TIME	RECHARGE TIME	STAND
WL1010R	1,000 Lumen Rechargeable Work Light	1,000	15W	2Hr. - 6 Hr.	5 Hr.	Pivoting Kick Stand

WL1010R

YELLOW JACKET® RECHARGEABLE CLAMP WORK LIGHT



- Unique clamping base
- 2-Axis swiveling head for directing light
- IP54 - water resistant
- Battery level indicator
- High and low output settings
- 5,000K Color Temperature



SPECIFICATIONS

MODEL #	DESCRIPTION	LUMENS	WATTS	RUN TIME	RECHARGE TIME	STAND
CL1170R	1,700 Lumen Rechargeable Clamp Work Light	1,700	20W	2Hr. - 7Hr.	5 Hr.	Clamp/Floor Stand

CL1170R

RECHARGEABLE WORK LIGHTS

WORK LIGHTS

HIGH POWERED LED RECHARGEABLE FLOOD LIGHTS



511000LITH

- Lithium ion 14.8V, 36Ah
- IP65, indoor or outdoor use
- 50,000 hour LED life
- Operating temperature: -20° to 140° F
- 5,000K light temperature

SPECIFICATIONS

MODEL #	DESCRIPTION	LUMENS	RUNTIME	RECHARGE TIME	WEIGHT
511000LITH	Solaris Single Head LED Rechargeable Flood Light	16,000 LM	2 Hr.	7 Hrs.	12.5 Lbs
		8,000 LM	4 Hr.		
		4,000 LM	8 Hr.		
		2,000 LM	16 Hr.		



SLIM EXTREME LED FLOOD LIGHT



4110150

- 120V, 5' - 18/3 SJTW cord
- IP65, indoor or outdoor use
- Operating temperature: -40° to 105° F
- 5,000K LED with 50,000 hr. life
- Works with tripod 311007

SPECIFICATIONS

MODEL #	DESCRIPTION	LUMENS	WATTS
4110150	15,000 Lumen Slim Extreme LED Flood Light	19,000	150W
4110220	22,000 Lumen Slim Extreme LED Flood Light	29,000	220W
4110300	30,000 Lumen Slim Extreme LED Flood Light	37,000	300W



FLOOD WORK LIGHTS

WORK LIGHTS

HALOGEN WORK LIGHTS



SPECIFICATIONS

MODEL #	DESCRIPTION	WATTS	HEAD COUNT	STAND
L878	250W Halogen Work Light with 4-in-1 Mounting Kit	250	1	4 in 1 , Curved Tube Stand, clamp, ground stake, hanging hook
L860	250W Halogen Work Light	250	1	Curved Tube Stand
L20	500W Halogen Work Light with Plastic Handle	500	1	Curved Tube Stand
L33	500W Halogen Work Light with Metal Handle	500	1	Curved Tube Stand
5050	500W Halogen Work Light with Magnetic Base	500	1	Magnet
5125ITL	500W Halogen Work Light with Twist Lock Plug	500	1	Curved Tube Stand
L10SLED	500W Halogen Work Light with Tripod and Detachable H-Stand	500	1	Tripod and Detachable H-Stand
L13	1,000W Halogen Twin Head Work Light with Tripod	1,000	2	Tripod
L14SLED	1,000W Halogen Twin Head Work Light with Tripod and Detachable Sled	1,000	2	Tripod and Detachable Sled



L20



L14SLED

HALOGEN WORK LIGHTS

WORK LIGHTS

TRIPODS



311001

SPECIFICATIONS

MODEL #	DESCRIPTION	MAX HEIGHT	WEIGHT	WORKS WITH
311001	Standard Tripod	5'	7.5 lbs	411215, 511510, 514124, 514125, 516001, 516002, 516003, 516004
311006	Medium Duty Tripod	5'	8.5 lbs	411315, 411230, 411330, 411250, 411350, 111505, 515100, 515103, 515104
311007	Heavy Duty Tripod	6'	9.5 lbs	111005, 111508, 111509, 4110150, 4110220, 4110300

HALOGEN REPLACEMENT BULBS



L23

SPECIFICATIONS

MODEL #	DESCRIPTION	WATTS	BULB QUANTITY
5911	150W T3 Halogen Bulb	150	1
L21	250W T3 Halogen Bulb in Plastic Storage Case, 6 Pack	250	6
L96	250W T3 Halogen Bulb	250	1
L22	500W T3 Halogen Bulb in Plastic Storage Case, 6 Pack	300	6
L12500W	500W T3 Halogen Bulb in Plastic Storage Case, 3 Pack	500	3
L16	500W T3 Halogen Bulb	500	1
L716SW	500W T3 Rough Service Halogen Bulb	500	1
L23SW	500W T3 Rough Service Halogen Bulb in Plastic Storage Case, 6 Pack	500	6
L23	500W T3 Rough Service Halogen Bulb in Plastic Storage Case, 6 Pack	500	6
78805000SW	500W T3 Halogen Bulb, 50 Pack	500	50
L15	600W T3 Halogen Bulb in Plastic Storage Case, 6 Pack	600	6

ACCESSORIES

PERSONAL LIGHTING

- Alkaline Battery Head Lamps
- Rechargeable Head Lamps
- SL Series Rechargeable Hand Held Lights
- H Series Rechargeable Hand Held Lights
- Alkaline Battery Hand Held Light



PERSONAL LIGHTING

ALKALINE BATTERY HEAD LAMP



HL1030SW

- Foam forehead pad
- Adjustable elastic head band
- Smooth dimming
- Hinged aimable head
- 2 x AAA batteries included

SPECIFICATIONS



MODEL #	DESCRIPTION	SPOT LIGHT LUMENS	FLOOD LIGHT LUMENS	RUN TIME	BATTERIES INCLUDED
HL1030SW	300 Lumen LED Adjustable Headlamp with (2x) AAA	120	300 - High, 30 - Low	Up to 30 Hours	2 x AAA Batteries

RECHARGEABLE HEAD LAMPS



HL12RSW

- Detachable magnetic light head
- Constant current - maintains light level throughout the life of the charge
- IP65 - weather proof
- 3-Year warranty
- Lithium ion battery
- HL25RSW has a hands free on/off sensor and down light for near field tasks like reading
- Includes two hard hat clips and charger

SPECIFICATIONS



HL25RSW

MODEL #	DESCRIPTION	DOWN LIGHT LUMENS	SPOT LIGHT LUMENS	FLOOD LIGHT LUMENS	RUN TIME	RECHARGE TIME
HL12RSW	120 Lumen Rechargeable LED Head Lamp	N/A	N/A	120 - High, 60 - Low	Up to 5 Hours	2-3 Hours
HL25RSW	250 Lumen Rechargeable LED Head Lamp	120 - High, 60 - Low	150	250 - High, 75 - Low	Up to 8 Hours	2-3 Hours

SL SERIES RECHARGEABLE HAND HELD LIGHTS



SL20RSW
SL50RSW

- Magnetic base
- Hanging Hook
- Articulating Arm
- Spot Light Tip
- 1M Drop Test
- Includes carrying case
- Constant current - maintains light level throughout the life of the charge
- 3 Year Warranty
- Lithium Ion Battery

SPECIFICATIONS



MODEL #	DESCRIPTION	SPOT LIGHT LUMENS	FLOOD LIGHT LUMENS	RUN TIME	CHARGER INCLUDED
SL20RSW	200 Lumen Rechargeable Folding LED Handheld Light	100	200 - High 50 - Low"	Up to 10 Hours	Yes
SL50RSW	500 Lumen Rechargeable Folding LED Handheld Light	100	500 - High 100 - Low"	Up to 12.5 Hours	Yes

HEAD LAMPS & HAND HELDS

PERSONAL LIGHTING

YELLOW JACKET® H SERIES RECHARGEABLE HAND HELD LIGHTS



HHL1030R HHL1060R

- Magnetic swivel base
- Smooth dimming
- Hanging hook
- 6,000K color temperature
- Lithium ion battery
- Spot light on tip (HHL1040R and HHL1060R)



SPECIFICATIONS

MODEL #	DESCRIPTION	SPOT LIGHT LUMENS	FLOOD LIGHT LUMENS	RUN TIME	CHARGER INCLUDED
HHL1030R	200 Lumen Yellow Jacket Rechargeable LED Pocket Light	NA	300 - High, 30 - Low	Up to 10 Hours	Yes
HHL1040R	400 Lumen Yellow Jacket Rechargeable LED Hand Held Adjustable Light	80	400 - High, 40 - Low	Up to 10 Hours	Yes
HHL1060R	600 Lumen Yellow Jacket Rechargeable LED Hand Held Adjustable Light	150	600 - High, 60 - Low	Up to 15 Hours	Yes

WOODS® ALKALINE BATTERY HAND HELD LIGHT



TLB20020

- Magnetic swivel base
- Spot light in end of light
- Swivel Hanging Hook



SPECIFICATIONS

MODEL #	DESCRIPTION	LUMENS	BATTERY TYPE
TLB20020	200 Lumen Handheld Task Light, w/ 3x AA Batteries	200	3x AA Batteries

HAND HELD LIGHTS

CLAMPS & TROUBLE LIGHTS

- Medium Duty Trouble Lights
- Heavy Duty Trouble Lights
- Clamp Lights and Brooders
- LED Clamp Light



CLAMP & TROUBLE LIGHTS

MEDIUM DUTY TROUBLE LIGHTS



692

SPECIFICATIONS



MODEL #	DESCRIPTION	CORD LENGTH	CORD	JACKET	OUTLET	GUARD
200	Medium Duty 15' Plastic Trouble Light, 18/2	15'	18/2	SJTW	No	Plastic
201	Medium Duty 25' Plastic Trouble Light, 18/2	25'	18/2		No	Plastic
681	Medium Duty 25' Metal Trouble Light, 18/3 w/Outlet	25'	18/3		Yes	Metal
682	Medium Duty 50' Metal Trouble Light, 18/3 w/Outlet	50'	18/3		Yes	Metal
691	Medium Duty 50' Metal Trouble Light, 16/3 w/ Outlet	25'	16/3		Yes	Metal
692	Medium Duty 50' Metal Trouble Light, 16/3 w/Outlet	50'	16/3		Yes	Metal
48000	Metal Cord Reel, 40' Metal Trouble Light w/ Outlet	40'	16/3		Yes	Metal

HEAVY DUTY TROUBLE LIGHTS



58588802SW

- Durable oil resistant cord jacket
- Elastomer cord jacket allows for maximum flexibility

SPECIFICATIONS



MODEL #	DESCRIPTION	CORD LENGTH	CORD	JACKET	OUTLET	GUARD
56578802SW	Heavy Duty Trouble Light, 16/3, 25' SJEOW, Metal Guard, w/ Outlet	25'	16/3	SJEOW	Yes	Metal
56588802SW	Heavy Duty Trouble Light, 16/3, 50' SJEOW, Metal Guard, w/Outlet	50'			Yes	Metal
58578802SW	Heavy Duty Trouble Light, 14/3, 25' SJEOW, Metal Guard, w/ Outlet	25'	14/3		Yes	Metal
58588802SW	Heavy Duty Trouble Light, 14/3, 50' SJEOW, Metal Guard, w/ Outlet	50'			Yes	Metal

MEDIUM & HEAVY DUTY

CLAMP & TROUBLE LIGHTS

HEAVY DUTY TROUBLE LIGHTS



160

- Non-marring clamp grip
- Built in hook
- 18/2 cord
- Porcelain socket
- Steel clamp
- Push-through switch

SPECIFICATIONS



MODEL #	DESCRIPTION	WATTS	CORD	REFLECTOR DIA	BULB PROTECTOR
160	60W Clamp Light with 5.5" Reflector	60	6' SJTW	5.5"	No
324	125W Clamp Light with Wire Reflector	125	6' SJTW	Wire	No
328	150W Clamp Light with None Reflector	150	6' SJTW	None	No
151	150W Clamp Light with 8.5" Reflector	150	6' SJTW	8.5"	No
2839	150W Clamp Light Socket with No Reflector	150	12' SJTW	8.5"	No
162	150W Clamp Light with 10" Reflector	150	6' SJTW	10"	No
165	250W Clamp Light with 10.5" Reflector	250	6' SJTW	10.5"	Yes
166	300W Clamp Light with 10" Reflector	300	6' SJTW	10"	Yes
167	300W Clamp Light with 10.5" Reflector	300	8' SJTW	10.5"	Yes

LED CLAMP LIGHT



CL20600YJ

- Non-marring clamp grip
- 18/2 Cord

SPECIFICATIONS



MODEL #	DESCRIPTION	CORD
CL20600YJ	600 Lumen LED Clamp Light	6' SJTW

CLAMP LIGHTS

INSTALLED LIGHTS

- Dock Lights
- 120V LED Dusk-to Dawn Lights
- 120V Security Lights with Bulbs
- Weather Tight Utility Lights
- Dusk to Dawn Photo Controls
- Outdoor Timer Switches



INSTALLED LIGHTS

DOCK LIGHTS



111510

- 40" Reach
- IP65 - Weather proof (111510 and 111515)
- Durable steel arm that prevent sagging
- Integrated power cord with plug

SPECIFICATIONS

MODEL #	DESCRIPTION	LUMENS	WATT	LIGHT SOURCE	LIGHT COLOR TEMPERATURE	BULB LIFE	FEATURES	CERTIFICATION
L41HDSW	500W Halogen Dock Light	8,000	500	Halogen-T3	3,000K	3,500 Hrs.	10' cord	UL
111510	LED Dock Light	1,700	20	Integrated LED	5,000K	50,000 Hrs.	IP65	cUL
111515	Replacement LED Dock Light Head							



120V LED DUSK-TO-DAWN LIGHTS



111511

- Aluminum Housing and Polycarbonate Lens
- IP65, Weatherproof
- Replacement photocell
- Operating Temperature: -30° to 120° F
- 5,000K LED with 50,000 Hr. Life

SPECIFICATIONS

MODEL #	DESCRIPTION	LUMENS	WATTS
L1683	3,500 Lumen LED Dusk to Dawn Light	3,500	40
111511	3,850 Lumen LED Dusk to Dawn Light	3,850	35
111512	6,000 Lumen LED Dusk to Dawn Light	6,000	55



120V SECURITY LIGHTS WITH BULBS



L1741

SPECIFICATIONS

MODEL #	DESCRIPTION	LAMP TYPE	WATT	PHOTOCELL INCLUDED
L1701	100W Metal Halide Dusk to Dawn Security Light	Metal Halide	100	Yes
L1743	150W Metal Halide Dusk to Dawn Security Light		150	Yes
L1755	65W Mogul Base Fluorescent Security Light	Mogul Fluorescent	65	No
L1730	70W High Pressure Sodium Dusk to Dawn Security Light	Metal Halide	150	Yes
L1741	150W High Pressure Sodium Dusk to Dawn Security Light	High Pressure Sodium	150	Yes
L177070W	70W High Pressure Sodium Dusk to Dawn Wall Light		70	Yes



SECURITY LIGHTS

INSTALLED LIGHTS

WEATHER TIGHT UTILITY LIGHTS



L1706



L1707SV

- Conduit knockouts on 4 sides
- 150W medium base socket for CFL, LED or incandescent bulbs
- Durable cast aluminum housing
- Tempered safety glass



SPECIFICATIONS

MODEL #	DESCRIPTION	MOUNT	COLOR
L1706	150W Outdoor Weather Tight Ceiling Mount Utility Light	Ceiling Mount	Gray
L1706AB			Antique Brass
L1706BLK			Black
L1706BS			Brushed Steel
L1706CH			Chrome
L1707SV	150W Outdoor Weather Tight Wall Mount Utility Light	Wall Mount	Gray
L1707SVAB			Antique Brass
L1707SVBLK			Black
L1707SVBS			Brushed Steel

DUSK TO DAWN PHOTO CONTROLS



L4700WD

- Automatically turns lights on at dusk and off at dawn
- Compatible with incandescent, fluorescent, halogen, LED, mercury vapor, high pressure sodium. Twist Lock also compatible with Metal Halide
- Time delay eliminates flicker and false On/Off triggers



SPECIFICATIONS

MODEL #	DESCRIPTION	CONNECTION	FEATURE	ELECTRICAL SPECIFICATIONS
59414WD	Mini Post Eye Light Control	HARDWIRE	Compact	120Vac 60Hz 1800W Tungsten, 1100VA Magnetic Ballast, 2A Electronic Ballast
59408WD	Post Eye Light Control	HARDWIRE	HD Bi-metal Switch	120Vac 60Hz 1800W Tungsten, 1100VA Magnetic Ballast, 5A Electronic Ballast
59410WD	Stem Mount Light Control	HARDWIRE	Light Level Adjust	120Vac 60Hz, 2000W Tungsten, 2000VA Magnetic Ballast, 15A Electronic Ballast
59411WD	Stem and Swivel Light Control	HARDWIRE	Adjustable	120Vac 60Hz, 2000W Tungsten, 2000VA Magnetic Ballast, 15A Electronic Ballast
59413WD	Swivel Mount Light Control	HARDWIRE	Light Level Adjust	120Vac 60Hz, 1800W Tungsten, 1100VA Magnetic Ballast, 3A Electronic Ballast
59412WD	Heavy Duty Twistlock Light Control	TWIST LOCK	Surge Protection	110-277Vac 60Hz, 1800W Tungsten, 1000VA Magnetic Ballast, 5A Electronic Ballast
L4700WD	Twistlock Light Control	TWIST LOCK	Surge Protection	120Vac 60Hz, 1800W Tungsten, 1100VA Magnetic Ballast, 5A Electronic Ballast

OUTDOOR TIMER SWITCHES



59103RWD

- Ideal use for lighting, signs, pumps, compressors, and other heavy duty application
- Manual override switch
- NEMA 3R lockable Box
- 1/2" and 3/4" Knockouts
- 48 On/Off settings, 30 minute intervals, repeats daily



SPECIFICATIONS

MODEL #	DESCRIPTION	TYPE	SPECIFICATIONS
59101RWD	24hr Heavy Duty Mechanical Time Switch	SPST	120Vac, 60Hz, 40A General/Resistive, 40A Tungsten, 20A Ballast, 1000VA Pilot Duty, 2HP (24FLA)
59103RWD	24hr Heavy Duty Mechanical Time Switch	DPST	120Vac, 60Hz, 40A General/Resistive, 40A Tungsten, 20A Ballast, 1000VA Pilot Duty, 2HP (24FLA)
59104RWD	24hr Heavy Duty Mechanical Time Switch	DPST	208-277Vac, 60Hz, 40A General/Resistive, 40A Tungsten, 20A Ballast, 1000VA Pilot Duty, 2HP (24FLA)

HAZARDOUS LOCATION

- Hazardous Location Inspection and Drop Lights
- Hazardous Location Flood Light



HAZARDOUS LOCATION

HAZARDOUS LOCATION INSPECTION AND DROP LIGHTS



1341

- Class 1 Div 1

SPECIFICATIONS



MODEL #	DESCRIPTION	RATING	GROUP	WATT	LIGHT SOURCE	CORD
1341	100W Class 1 Div 1 Drop Light	Class 1 Div 1	6' SJTW	5.5"	Incandescent	50' 16/3 SOW Cord
1345-LED	8W Class 1 Div 1 LED Inspection Light		6' SJTW	None	LED	

HAZARDOUS LOCATION LED LIGHTS



514009

- Lithium ion battery
- For use in hazardous areas
- Impact resistant construction

SPECIFICATIONS



MODEL #	DESCRIPTION	LUMENS	RUN TIME	BATTERY TYPE	IP RATING	FEATURE
514007	125 Lumen Intrinsically Safe LED Flashlight	125 LM - High 55 LM - Low	42.5 Hr. - High 80 Hr. - Low	x3 C	IP67	Waterproof
514008	160 Lumen Intrinsically Safe LED Flashlight	160 LM - High 65 LM - Low	6 Hr. - High 13 Hr. - Low	x4 AA	IP67	Waterproof
514009	270 Lumen Intrinsically Safe Right Angle LED Flashlight	270 LM - High 135 LM - Low	6.5 Hr. - High 13 Hr. - Low	x4 AA	IP54	Waterproof
514012	200 Lumen Intrinsically Safe LED Head Lamp	200 LM - High 100 LM - Low	2.5 Hr. - High 4.5 Hr. - Low	x3 AAA	IP67	Waterproof

DROP LIGHTS



Southwire™

TOOLS & EQUIPMENT

LIGHTING SOLUTIONS CATALOG

GET SOCIAL WITH US:



[/SOUTHWIRETOOLS](#)
[/SOUTHWIRETOOLSLATINO](#)



[@SOUTHWIRETOOLS](#)



[@SOUTHWIRETOOLS](#)



[SOUTHWIRETOOLS](#)

[SOUTHWIRETOOLS.COM](#) | 1-855-SWT00LS

All Trademarks or Registered Trademarks (TM/®) are owned or licensed by Southwire Company.
Any other TM/®- Trademark or Registered Trademark of Southwire Company.