3691038e 1 04.08.2024

# Diva Controls

## Diva 3-Way Dimmers

### Features

- Large paddle switch with a captive linear-slide dimmer for a standard designer wallplate opening.
- Full family of products for most lighting sources.
- Dimmers feature built-in soft-glow nightlight.
- Use standard single-pole and 3-way wiring for easy installation in any home.
- For more choices, see the new Diva Satin Colors product line.

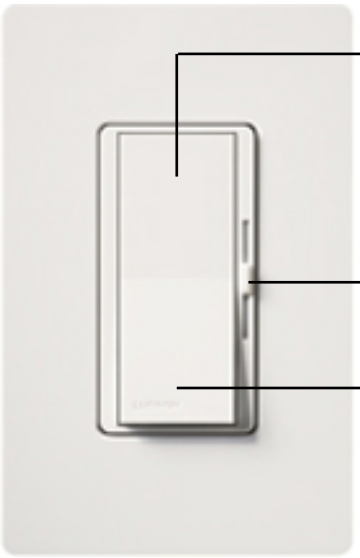


Preset Dimmer

Preset Fan-Speed Control



| Job Name: | Model Numbers: |
|---|---|
| Job Number: | |

3691038e 2 04.08.2024

# Specifications

### Standard Features

- Square law dimming
- Captive linear slider
- Precise color matching

### Standards

- UL listed
- CSA
- NOM

### Power / Performance

- 120 V~ 60 Hz
- Power-failure memory
- Electrostatic discharge tested
- RFI Suppression



| Job Name: | Model Numbers: |
| --- | --- |
| Job Number: | |

## Dimensions

### Front

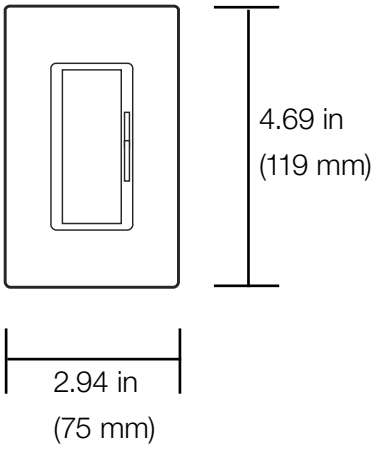


### Profile

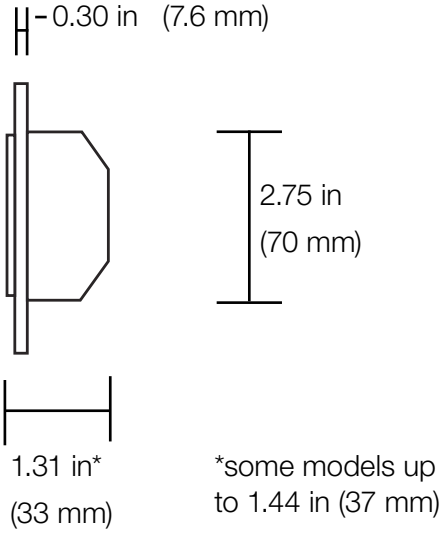


*some models up to 1.44 in (37 mm)



| Job Name: | Model Numbers: |
|---|---|
| Job Number: | |

Description | Max Capacity[1,6] | Model #

# Dimmers

## Incandescent

| Preset Dimmers with Nightlight | | |
|---|---|---|
| Single-pole | 1000 W | DV-10P- |
| 3-way | 1000 W | DV-103P- |

**Note:** The nightlight is visible best on the lighter color. For 3-way and 4-war switching, use with Claro switches or other mechanical switches.

## Electronic Low-Voltage

| Preset Dimmers with Nightlight | | |
|---|---|---|
| Single-pole | 300 W | DVELV-300P- |
| 3-way | 300 W | DVELV-303P- |

**Note:** Requires neutral wire connection wire connection. The nightlight is visible best on the lighter colors. For 3-way and 4-way switching, use with Claro switches or other mechanical switches.

## Magnetic Low-Voltage

| Preset Dimmers with Nightlight | | |
|---|---|---|
| Single-pole | 600 VA (450 W)[2] | DVLV-600P- |
| Single-pole | 1000 VA (800 W)[2] | DVLV-10P- |
| 3-way | 600 VA (450 W)[2] | DVLV-603P- |
| 3-way | 1000 VA (800 W)[2] | DVLV-103P- |

**Note:** The nightlight is visible best on the lighter colors. For 3-way and 4-way switching, use with Claro switches or other mechanical switches.

## 3-Wire LED/Fluorescent Ballast

| Preset Dimmers with Nightlight[4] | | |
|---|---|---|
| Single-pole, 277 V~ | 8 A | DVF-103P- |
| Single-pole | 6 A | DVF-103P-277 V |
| 3-way | 8 A | DVF-103P- |
| 3-way, 277 V~ | 6 A | DVF-103P-277 V |

**Note:** Requires neutral wire connection. The nightlight is visible best on the lighter colors. For 3-way and 4-way switching, use with Claro switches or other mechanical switches.

1 For capacities in multigang installations see **Derating/Maximum Capacity** on pg. 4
2 Actual lamp wattages.
3 For 3-way and 4-way switching, use with Claro switches or other mechanical switches.
4 No derating required if ganged.
5 A physical barrier (partition) must exist when ganging with line-voltage products.
6 For minimum load requirements see **Minimum Load Requirements** on pg. 5

Description | Max Capacity[1,6] | Model #

# Fan-Speed Controls

## Quiet Controls

| Preset Fan-Speed Controls[3,4] | | |
|---|---|---|
| Single-pole/3-way | 1.5 A | DVFSQ-F- |
| 3-speed | | |

| Preset Dimmers with Nightlight[4] | | |
|---|---|---|
| Fan 3-speed with off | 1.5 A | DVFSQ-LF- |
| Single-pole switch: | | |
| Inc./Hal. | 2 A | |
| CFL/LED | 1 A | |

**Note:** Does not have soft-glow nightlight.

# Switches[4]

## General Purpose Switching of all Sources and Motor Loads

| | | |
|---|---|---|
| Single-pole, 120/277 V~ | 15 A | CA-1PS- |
| 3-way, 120/277 V~ | 15 A | CA-3PS- |
| 4-way, 120/277 V~ | 15 A | CA-4PS- |

# Accessories

| Receptacle[4] | | |
|---|---|---|
| 125 V~ | 15 A | CAR-15- |
| 125 V~ | 20 A | CAR-20- |

| GFCI Receptacle[4] | | |
|---|---|---|
| 125 V~ | 15 A | CAR-15-GFST- |
| 125 V~ | 20 A | CAR-20-GFST- |

A physical barrier (partition) must exist when ganging with line-voltage products



| Single Telephone Jack[5] | | |
|---|---|---|
| 6 Conductor, RJ11 | 15 A | CA-PJ- |

Note: Also accepts most 4-conductor plugs



| Cable TV Jack[4,5] | |
|---|---|
| F-Style | |
| 75 Ω, coaxial cable jack | CA-CJ- |



| Job Name: | Model Numbers: |
|---|---|
| Job Number: | |

## Derating / Maximum Capacity



No side sections removed
(Full Capacity)



One side section removed
(End Units)



Two side sections removed
(Middle Unit)

### Incandescent Dimmers

| | | |
|---|---|---|
| 600 W | 500 W | 400 W |
| 1000 W | 800 W | 650 W |

### Electronic Low-Voltage

| | | |
|---|---|---|
| 300 W | 250 W | 200 W |

### Magentic Low-Voltage

| | | |
|---|---|---|
| 600 VA<br>(450 W[1]) | 500 VA<br>(375 W[1]) | 400 VA<br>(300 W[1]) |

| | | |
|---|---|---|
| 1000 VA<br>(800 W[1]) | 800 VA<br>(650 W[1]) | 650 VA<br>(500 W[1]) |

### Fluorescent Hi-lume/Eco-10 (ECO-Series)

| | |
|---|---|
| 20 ballasts / 8 A | No derating required |

### Fan-Speed Controls

| | |
|---|---|
| 1.5 A | No derating required |

1 Actual lamp wattage.

## Minimum Load Requirements

- Incandescent/Magenetic Low-Voltage: 40 W
- Electronic Low-Voltage: 5 W
- Fluorescent
  - — Hi-lume/Eco-10 (Eco Series): 1 ballast
- Fan-Speed Controls: .33 A (40 W)



| | |
|---|---|
| **Job Name:**<br><br>**Job Number:** | **Model Numbers:** |

# Accessories

### Field Customizable Multi-Port Frame



- 6-Port frame with 6 blanks
- CA-6PF-**

** For use with Lutron connectors shown below. Also compatible with Hubbell Xcelerator and snap-fit connectors.

### Connectors

- For use with 6-Port frame (CA-6PF-**).
- Each connector fills one port.
- Available in white only.

| | | |
|---|---|---|
| Phone Jack | 6-conductor, RJ11, Category 3 | CON-1P-C3-WH |
| Phone Jack | 8-conductor, RJ45, Category 5e | CON-1P-C5E-WH |
| Phone Jack | 8-conductor, RJ45, Category 6 | CON-1P-C6-WH |
| Fiber Jack | MT-RJ Feed-Through | CON-1F-MTRJ-WH |
| Fiber Jack | SC Simplex | CON-1F-SC-WH |
| Fiber Jack | LC Non-Flush Mount | CON-1F-LC-WH |
| Fiber Jack | ST Style | CON-1F-ST-WH |
| Cable Jack | F-Style, 75 Ω Coaxial cable | CON-1C-WH |
| BNC Jack | BNC Connector | CON-1B-WH |



| Job Name: | Model Numbers: |
|---|---|
| Job Number: | |

3691038e 7 04.08.2024

## Standard Wallplates

1-Gang CW-1-

2.94 in (75 mm) W x 4.69 in (119 mm) H x 0.30 in (7.6 mm) D



2-Gang CW-2-

4.75 in (121 mm) W x 4.69 in (119 mm) H x 0.30 in (7.6 mm) D



3-Gang CW-3-

6.56 in (167 mm) W x 4.69 in (119 mm) H x 0.30 in (7.6 mm) D



4-Gang CW-4-

8.37 in (213 mm) W x 4.69 in (119 mm) H x 0.30 in (7.6 mm) D



5-Gang CW-5-

10.18 in (259 mm) W x 4.69 in (119 mm) H x 0.30 in (7.6 mm) D

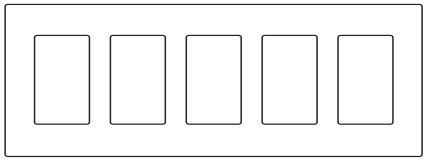

6-Gang CW-6-

12.00 in (305 mm) W x 4.69 in (119 mm) H x 0.30 in (7.6 mm) D

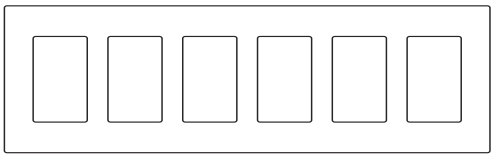

## Standard Colors/Finishes

For the latest color offerings, please see our website: www.lutron.com/colors



| Job Name: | Model Numbers: |
|---|---|
| Job Number: | |

# Wiring Diagrams

## Wiring Diagram 1

### Single-Pole Wiring — Model #

DV-600P-**
DV-10P-**
DVLV-600P-**
DVLV-10P-**
CA-1PS-**

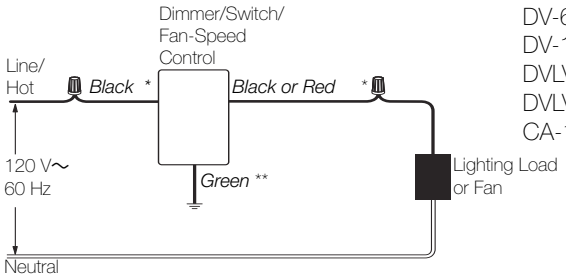


Ground
Wire Connectors

* or Brass screw terminal
** or Green screw terminal

## Wiring Diagram 2

### Single-Pole Wiring of 3-Way Control — Model #

DVFSQ-F-**
DVLV-103P-**
DVLV-603P-**
DV-103P-**
DV-603P-**

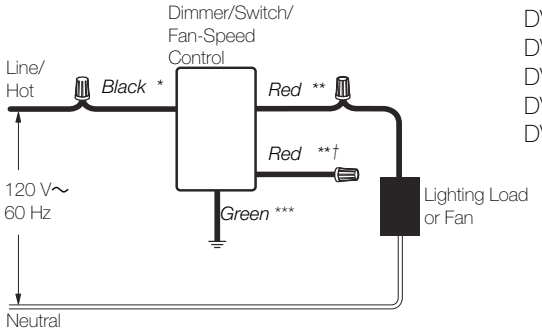


Ground
Wire Connectors

* or Copper/Black screw terminal
** or Brass screw terminal
*** or Green screw terminal
† or Red/White stripe (cap off)

## Wiring Diagram 3

### Single-Pole Wiring — Model #

DVELV-300P-**

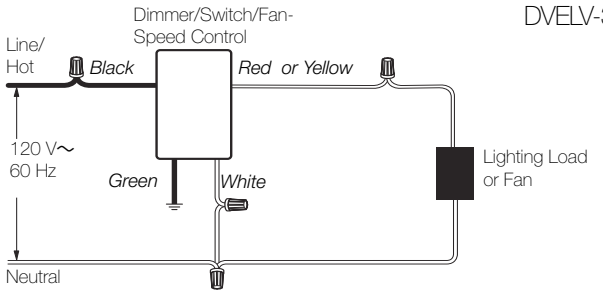


Ground
Wire Connectors

## Wiring Diagram 4

### 3-Way Wiring — Model #

DVELV-303P-**
CA-3PS-**

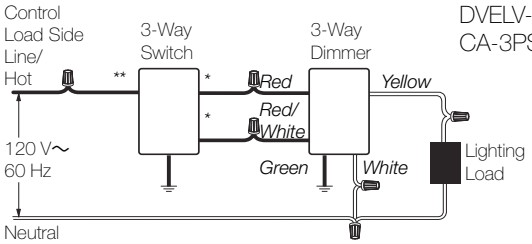


Ground
Wire Connectors

* or Copper/Black screw terminal
** or Brass/Gold screw terminal

Note: 3-way switch must be wired on the line side of the dimmer.

## Wiring Diagram 5

### 3-Way Used as Single-Pole — Model #

DVELV-303P-**

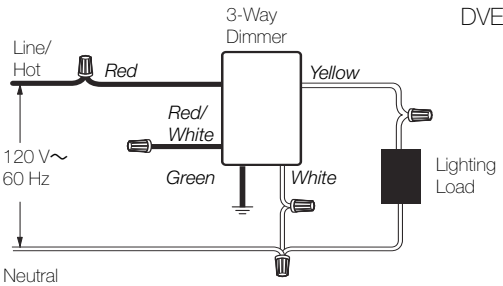


Ground
Wire Connectors



| Job Name: | Model Numbers: |
|---|---|
| Job Number: | |

# Wiring Diagrams

## Wiring Diagram 6

### 3-Way Wiring

**Model #**

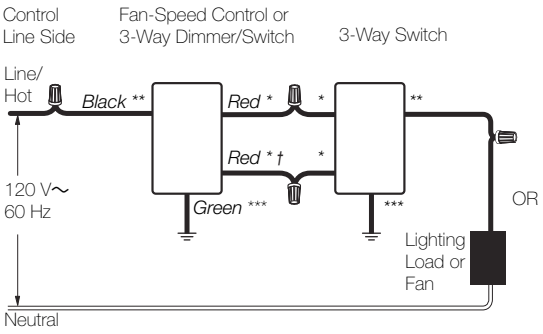


OR

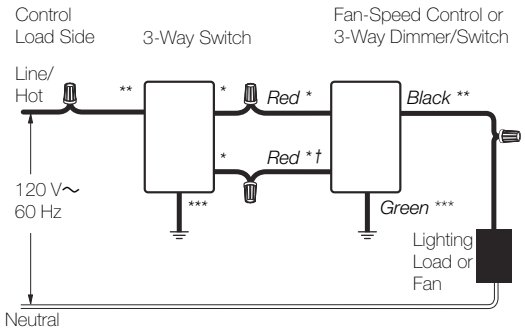


Ground

Wire Connectors

DV-603P-**
DV-103P-**
DVLV-603P-**
DVLV-103P-**
DVFSQ-F-**
CA-3PS-**

* or Brass/Gold screw terminal

** or Copper/Black screw terminal

† ** or Green screw terminal

*** or Red/White stripe

## Wiring Diagram 7

### 4-Way Wiring

**Model #**

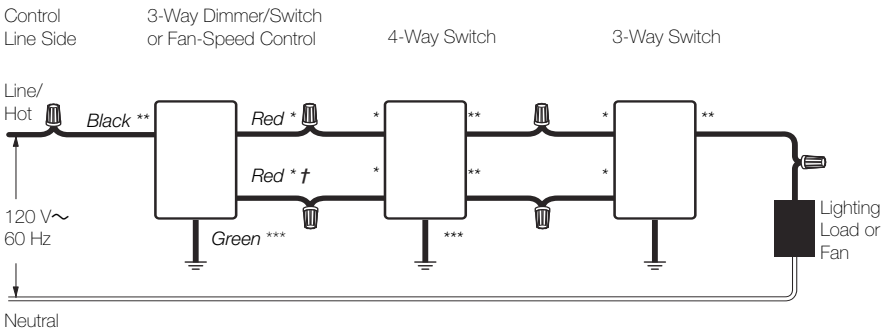


OR

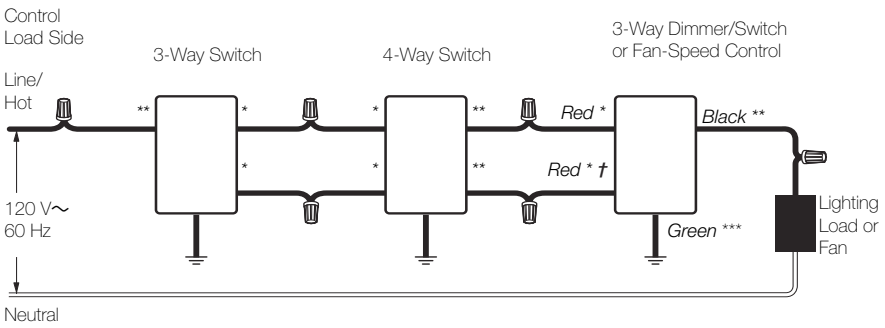


Ground

Wire Connectors

DV-603P-**
DV-103P-**
DVLV-603P-**
DVLV-103P-**
DVFSQ-F-**
CA-3PS-**
CA-4PS-**

* or Copper/Black screw terminal

** or Brass/Gold screw terminal

*** or Green screw terminal

† *** or Red/White stripe



| Job Name: | Model Numbers: |
|---|---|
| Job Number: | |

# Wiring Diagrams

## Wiring Diagram 8

### Single-Pole Wiring of a 3-Way Control

**Model #**

DVF-103P-**
DVF-103P-277-**

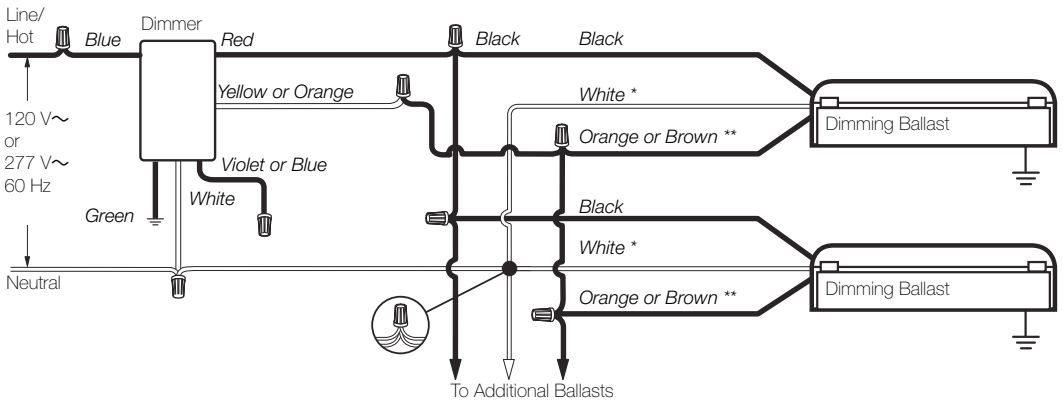


Ground
Wire Connectors
Typical 4-Wire Connection

* must use lamp disconnect sockets with electronic dimming ballasts

** or Yellow/Blue or Yellow/Green when used with magnetic dimming ballasts

## Wiring Diagram 9

### 3-Way Wiring

**Model #**

DVF-103P-**
DVF-103P-277-**
CA-3PS-**

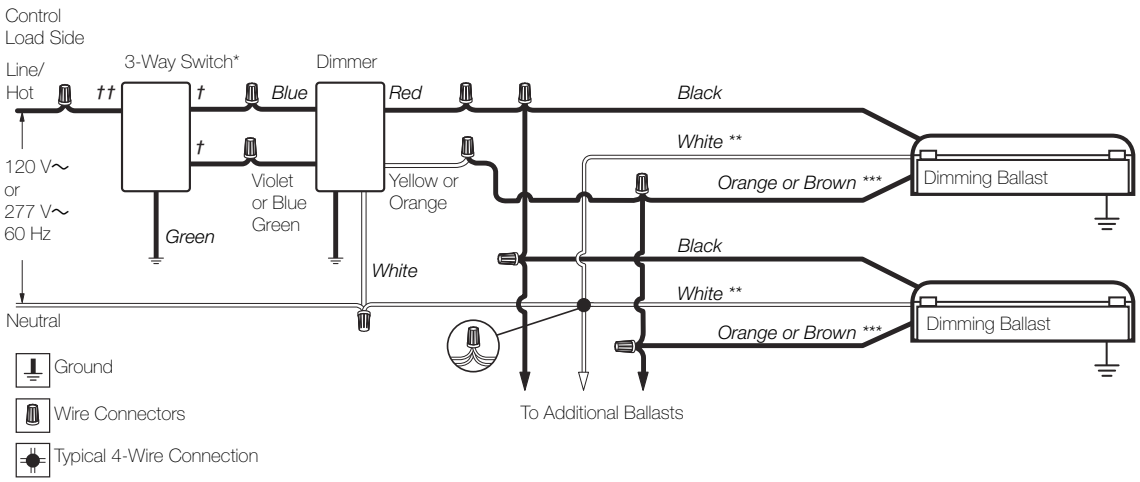


Ground
Wire Connectors
Typical 4-Wire Connection

* 3-Way switch must be wired on line side of dimmer
** must use lamp disconnect sockets with electronic dimming ballasts
*** or Yellow/Blue or Yellow/Green when used with magnetic dimming ballasts
† or Copper/Black screw terminal
†† or Brass/Gold screw terminal



| Job Name: | Model Numbers: |
|---|---|
| Job Number: | |

# Wiring Diagrams

## Wiring Diagram 10

| Cable TV Jack Wiring | Model # |
|---|---|
| | CA-CJ-** |

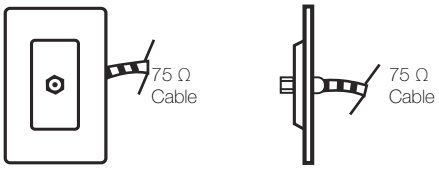


Cable TV Jack

## Wiring Diagram 11

| Telephone Jack Wiring | Model # |
|---|---|
| | CA-PJ-** |



6-Conductor
Telephone Jack*

| Jack Position | Wire Color |
|---|---|
| 1 | White |
| 2 | Black |
| 3 | Red |
| 4 | Green |
| 5 | Yellow |
| 6 | Blue |

*accepts most 4-conductor jacks

## Wiring Diagram 12

| Receptacle Wiring | Model # |
|---|---|
| | CAR-15-** |

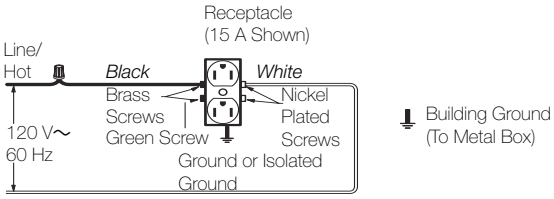


## Wiring Diagram 13

| GFCI Receptacle Wiring | Model # |
|---|---|
| | CAR-15-GFST-** |

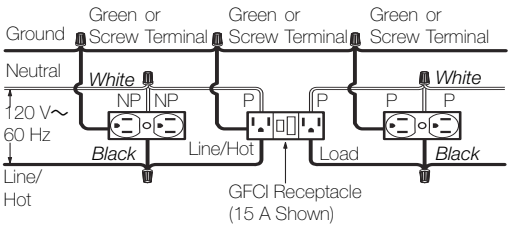


P - Protected
NP - Not Protected

Wire Connectors

The Lutron logo, Lutron, Diva, Claro, Hi-lume, Eco-10, and Satin Colors are trademarks or registered trademarks of Lutron Electronics Co., Inc. in the US and/or other countries.

All other product names, logos, and brands are property of their respective owners.



| Job Name: | Model Numbers: |
|---|---|
| Job Number: | |

3691038e 1 04.08.2024

# Diva Controls

## Diva 3-Way Dimmers

### Features

- Large paddle switch with a captive linear-slide dimmer for a standard designer wallplate opening.
- Full family of products for most lighting sources.
- Dimmers feature built-in soft-glow nightlight.
- Use standard single-pole and 3-way wiring for easy installation in any home.
- For more choices, see the new Diva Satin Colors product line.

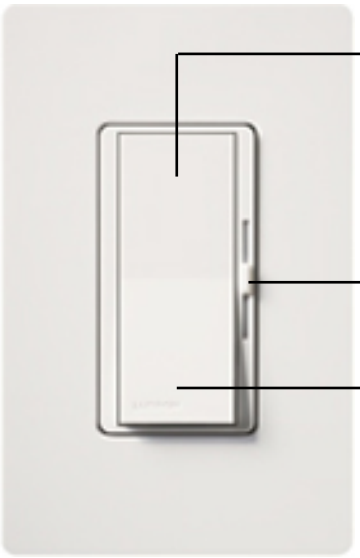


Preset Dimmer

Preset Fan-Speed Control



| Job Name: | Model Numbers: |
|---|---|
| Job Number: | |

3691038e 2 04.08.2024

# Specifications

### Standard Features

- Square law dimming
- Captive linear slider
- Precise color matching

### Standards

- UL listed
- CSA
- NOM

### Power / Performance

- 120 V~ 60 Hz
- Power-failure memory
- Electrostatic discharge tested
- RFI Suppression



| Job Name: | Model Numbers: |
| --- | --- |
| Job Number: | |

## Dimensions

### Front

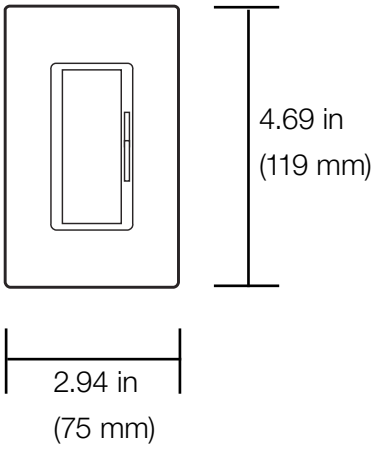


### Profile

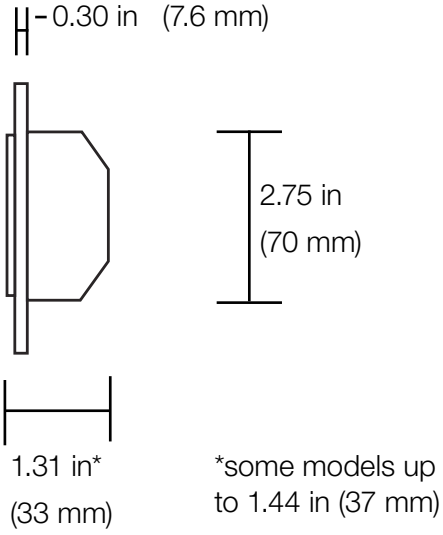


*some models up to 1.44 in (37 mm)



| Job Name: | Model Numbers: |
|---|---|
| Job Number: | |

Description | Max Capacity[1,6] | Model #

# Dimmers

## Incandescent

| Preset Dimmers with Nightlight | | |
|---|---|---|
| Single-pole | 1000 W | DV-10P- |
| 3-way | 1000 W | DV-103P- |

**Note:** The nightlight is visible best on the lighter color. For 3-way and 4-war switching, use with Claro switches or other mechanical switches.

## Electronic Low-Voltage

| Preset Dimmers with Nightlight | | |
|---|---|---|
| Single-pole | 300 W | DVELV-300P- |
| 3-way | 300 W | DVELV-303P- |

**Note:** Requires neutral wire connection wire connection. The nightlight is visible best on the lighter colors. For 3-way and 4-way switching, use with Claro switches or other mechanical switches.

## Magnetic Low-Voltage

| Preset Dimmers with Nightlight | | |
|---|---|---|
| Single-pole | 600 VA (450 W)[2] | DVLV-600P- |
| Single-pole | 1000 VA (800 W)[2] | DVLV-10P- |
| 3-way | 600 VA (450 W)[2] | DVLV-603P- |
| 3-way | 1000 VA (800 W)[2] | DVLV-103P- |

**Note:** The nightlight is visible best on the lighter colors. For 3-way and 4-way switching, use with Claro switches or other mechanical switches.

## 3-Wire LED/Fluorescent Ballast

| Preset Dimmers with Nightlight[4] | | |
|---|---|---|
| Single-pole, 277 V~ | 8 A | DVF-103P- |
| Single-pole | 6 A | DVF-103P-277 V |
| 3-way | 8 A | DVF-103P- |
| 3-way, 277 V~ | 6 A | DVF-103P-277 V |

**Note:** Requires neutral wire connection. The nightlight is visible best on the lighter colors. For 3-way and 4-way switching, use with Claro switches or other mechanical switches.

1 For capacities in multigang installations see **Derating/Maximum Capacity** on pg. 4
2 Actual lamp wattages.
3 For 3-way and 4-way switching, use with Claro switches or other mechanical switches.
4 No derating required if ganged.
5 A physical barrier (partition) must exist when ganging with line-voltage products.
6 For minimum load requirements see **Minimum Load Requirements** on pg. 5

Description | Max Capacity[1,6] | Model #

# Fan-Speed Controls

## Quiet Controls

| Preset Fan-Speed Controls[3,4] | | |
|---|---|---|
| Single-pole/3-way | 1.5 A | DVFSQ-F- |
| 3-speed | | |

| Preset Dimmers with Nightlight[4] | | |
|---|---|---|
| Fan 3-speed with off | 1.5 A | DVFSQ-LF- |
| Single-pole switch: | | |
| Inc./Hal. | 2 A | |
| CFL/LED | 1 A | |

**Note:** Does not have soft-glow nightlight.

# Switches[4]

## General Purpose Switching of all Sources and Motor Loads

| | | |
|---|---|---|
| Single-pole, 120/277 V~ | 15 A | CA-1PS- |
| 3-way, 120/277 V~ | 15 A | CA-3PS- |
| 4-way, 120/277 V~ | 15 A | CA-4PS- |

# Accessories

| Receptacle[4] | | |
|---|---|---|
| 125 V~ | 15 A | CAR-15- |
| 125 V~ | 20 A | CAR-20- |

| GFCI Receptacle[4] | | |
|---|---|---|
| 125 V~ | 15 A | CAR-15-GFST- |
| 125 V~ | 20 A | CAR-20-GFST- |

A physical barrier (partition) must exist when ganging with line-voltage products



| Single Telephone Jack[5] | | |
|---|---|---|
| 6 Conductor, RJ11 | 15 A | CA-PJ- |

Note: Also accepts most 4-conductor plugs



| Cable TV Jack[4,5] | |
|---|---|
| F-Style | |
| 75 Ω, coaxial cable jack | CA-CJ- |



| Job Name: | Model Numbers: |
|---|---|
| Job Number: | |

## Derating / Maximum Capacity



No side sections removed
(Full Capacity)



One side section removed
(End Units)



Two side sections removed
(Middle Unit)

### Incandescent Dimmers

| | | |
|---|---|---|
| 600 W | 500 W | 400 W |
| 1000 W | 800 W | 650 W |

### Electronic Low-Voltage

| | | |
|---|---|---|
| 300 W | 250 W | 200 W |

### Magentic Low-Voltage

| | | |
|---|---|---|
| 600 VA<br>(450 W[1]) | 500 VA<br>(375 W[1]) | 400 VA<br>(300 W[1]) |

| | | |
|---|---|---|
| 1000 VA<br>(800 W[1]) | 800 VA<br>(650 W[1]) | 650 VA<br>(500 W[1]) |

### Fluorescent Hi-lume/Eco-10 (ECO-Series)

| | |
|---|---|
| 20 ballasts / 8 A | No derating required |

### Fan-Speed Controls

| | |
|---|---|
| 1.5 A | No derating required |

1 Actual lamp wattage.

## Minimum Load Requirements

- Incandescent/Magenetic Low-Voltage: 40 W
- Electronic Low-Voltage: 5 W
- Fluorescent
  - — Hi-lume/Eco-10 (Eco Series): 1 ballast
- Fan-Speed Controls: .33 A (40 W)



| | |
|---|---|
| **Job Name:**<br><br>**Job Number:** | **Model Numbers:** |

# Accessories

### Field Customizable Multi-Port Frame



- 6-Port frame with 6 blanks
- CA-6PF-**

** For use with Lutron connectors shown below. Also compatible with Hubbell Xcelerator and snap-fit connectors.

### Connectors

- For use with 6-Port frame (CA-6PF-**).
- Each connector fills one port.
- Available in white only.

| | | |
|---|---|---|
| Phone Jack | 6-conductor, RJ11, Category 3 | CON-1P-C3-WH |
| Phone Jack | 8-conductor, RJ45, Category 5e | CON-1P-C5E-WH |
| Phone Jack | 8-conductor, RJ45, Category 6 | CON-1P-C6-WH |
| Fiber Jack | MT-RJ Feed-Through | CON-1F-MTRJ-WH |
| Fiber Jack | SC Simplex | CON-1F-SC-WH |
| Fiber Jack | LC Non-Flush Mount | CON-1F-LC-WH |
| Fiber Jack | ST Style | CON-1F-ST-WH |
| Cable Jack | F-Style, 75 Ω Coaxial cable | CON-1C-WH |
| BNC Jack | BNC Connector | CON-1B-WH |



| Job Name: | Model Numbers: |
|---|---|
| Job Number: | |

3691038e 7 04.08.2024

## Standard Wallplates

1-Gang CW-1-

2.94 in (75 mm) W x 4.69 in (119 mm) H x 0.30 in (7.6 mm) D



2-Gang CW-2-

4.75 in (121 mm) W x 4.69 in (119 mm) H x 0.30 in (7.6 mm) D



3-Gang CW-3-

6.56 in (167 mm) W x 4.69 in (119 mm) H x 0.30 in (7.6 mm) D



4-Gang CW-4-

8.37 in (213 mm) W x 4.69 in (119 mm) H x 0.30 in (7.6 mm) D



5-Gang CW-5-

10.18 in (259 mm) W x 4.69 in (119 mm) H x 0.30 in (7.6 mm) D

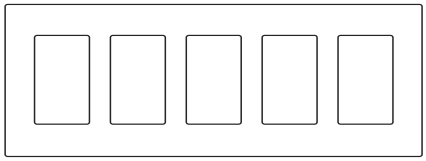

6-Gang CW-6-

12.00 in (305 mm) W x 4.69 in (119 mm) H x 0.30 in (7.6 mm) D

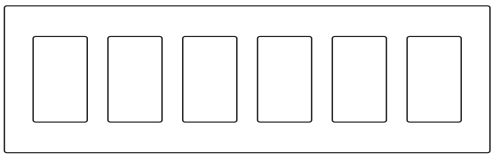

## Standard Colors/Finishes

For the latest color offerings, please see our website: www.lutron.com/colors



| Job Name: | Model Numbers: |
|---|---|
| Job Number: | |

# Wiring Diagrams

## Wiring Diagram 1

### Single-Pole Wiring — Model #

DV-600P-**
DV-10P-**
DVLV-600P-**
DVLV-10P-**
CA-1PS-**

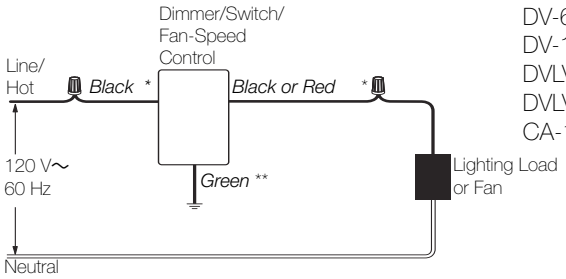


Ground
Wire Connectors

* or Brass screw terminal
** or Green screw terminal

## Wiring Diagram 2

### Single-Pole Wiring of 3-Way Control — Model #

DVFSQ-F-**
DVLV-103P-**
DVLV-603P-**
DV-103P-**
DV-603P-**

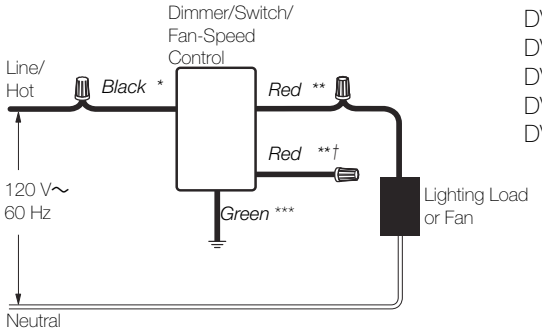


Ground
Wire Connectors

* or Copper/Black screw terminal
** or Brass screw terminal
*** or Green screw terminal
† or Red/White stripe (cap off)

## Wiring Diagram 3

### Single-Pole Wiring — Model #

DVELV-300P-**

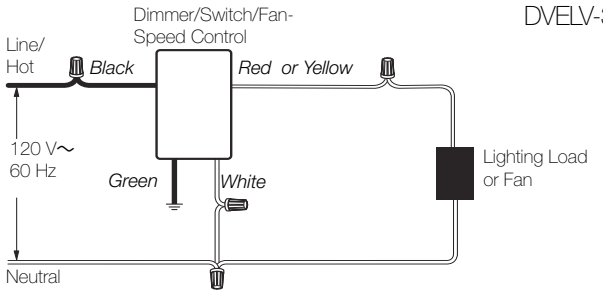


Ground
Wire Connectors

## Wiring Diagram 4

### 3-Way Wiring — Model #

DVELV-303P-**
CA-3PS-**

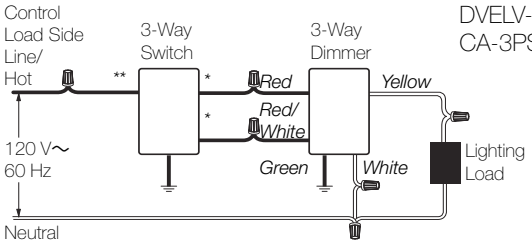


Ground
Wire Connectors

* or Copper/Black screw terminal
** or Brass/Gold screw terminal

Note: 3-way switch must be wired on the line side of the dimmer.

## Wiring Diagram 5

### 3-Way Used as Single-Pole — Model #

DVELV-303P-**

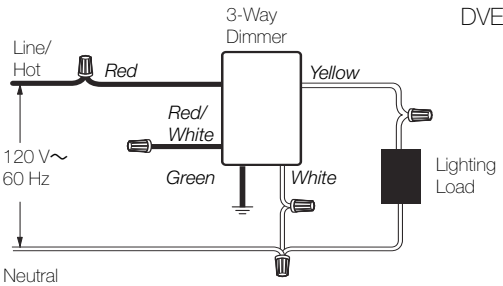


Ground
Wire Connectors



| Job Name: | Model Numbers: |
|---|---|
| Job Number: | |

# Wiring Diagrams

## Wiring Diagram 6

### 3-Way Wiring

**Model #**

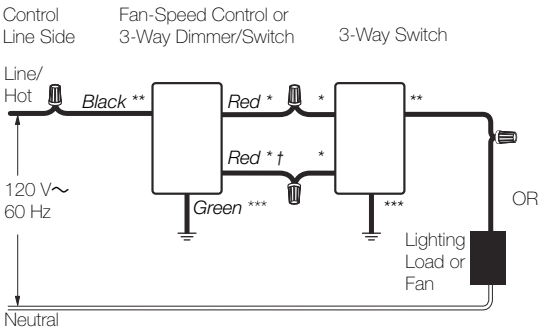


OR

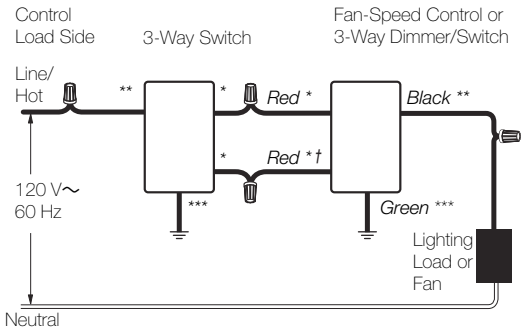


Ground

Wire Connectors

DV-603P-**
DV-103P-**
DVLV-603P-**
DVLV-103P-**
DVFSQ-F-**
CA-3PS-**

* or Brass/Gold screw terminal

** or Copper/Black screw terminal

† ** or Green screw terminal

*** or Red/White stripe

## Wiring Diagram 7

### 4-Way Wiring

**Model #**

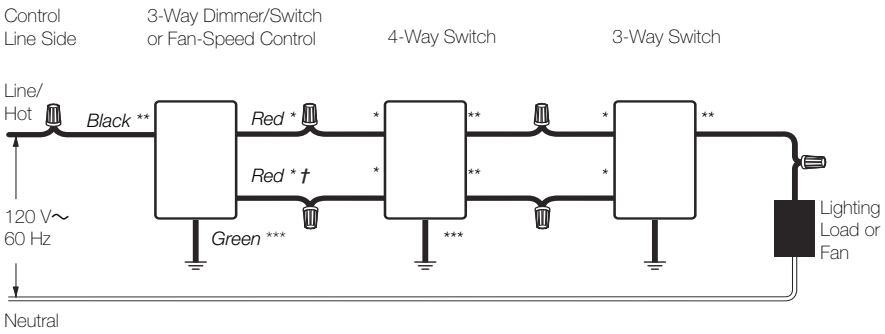


OR

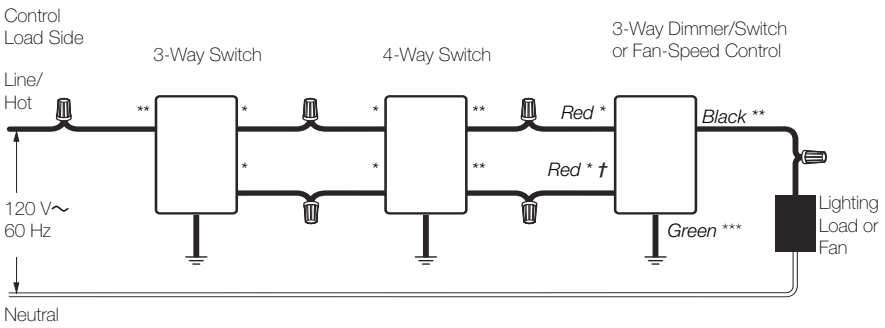


Ground

Wire Connectors

DV-603P-**
DV-103P-**
DVLV-603P-**
DVLV-103P-**
DVFSQ-F-**
CA-3PS-**
CA-4PS-**

* or Copper/Black screw terminal

** or Brass/Gold screw terminal

*** or Green screw terminal

† *** or Red/White stripe



| Job Name: | Model Numbers: |
|---|---|
| Job Number: | |

# Wiring Diagrams

## Wiring Diagram 8

### Single-Pole Wiring of a 3-Way Control

**Model #**

DVF-103P-**
DVF-103P-277-**

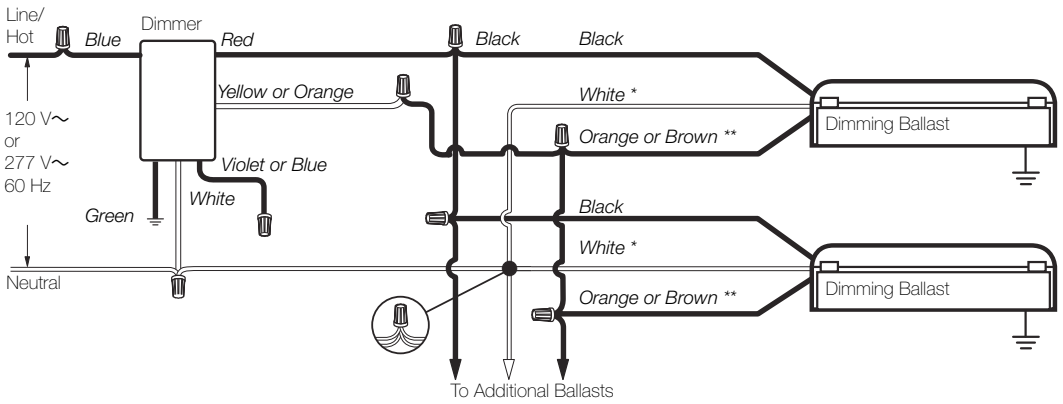


Ground
Wire Connectors
Typical 4-Wire Connection

* must use lamp disconnect sockets with electronic dimming ballasts

** or Yellow/Blue or Yellow/Green when used with magnetic dimming ballasts

## Wiring Diagram 9

### 3-Way Wiring

**Model #**

DVF-103P-**
DVF-103P-277-**
CA-3PS-**

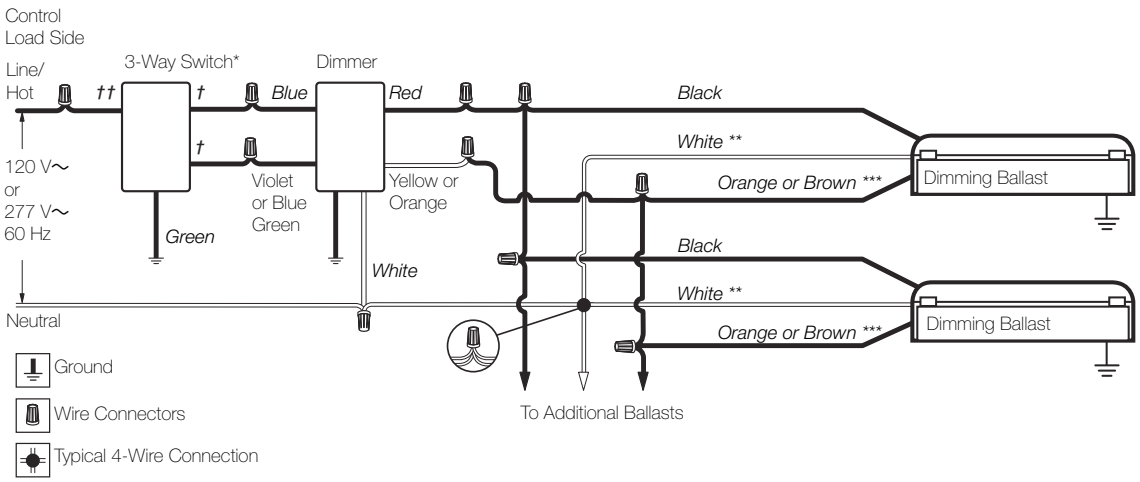


Ground
Wire Connectors
Typical 4-Wire Connection

* 3-Way switch must be wired on line side of dimmer
** must use lamp disconnect sockets with electronic dimming ballasts
*** or Yellow/Blue or Yellow/Green when used with magnetic dimming ballasts
† or Copper/Black screw terminal
†† or Brass/Gold screw terminal



| Job Name: | Model Numbers: |
|---|---|
| Job Number: | |

# Wiring Diagrams

## Wiring Diagram 10

| Cable TV Jack Wiring | Model # |
|---|---|
| | CA-CJ-** |

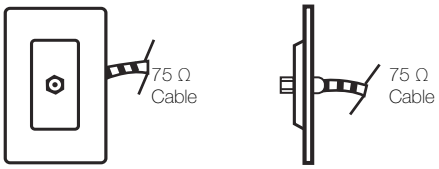


Cable TV Jack

## Wiring Diagram 11

| Telephone Jack Wiring | Model # |
|---|---|
| | CA-PJ-** |



6-Conductor
Telephone Jack*

| Jack Position | Wire Color |
|---|---|
| 1 | White |
| 2 | Black |
| 3 | Red |
| 4 | Green |
| 5 | Yellow |
| 6 | Blue |

*accepts most 4-conductor jacks

## Wiring Diagram 12

| Receptacle Wiring | Model # |
|---|---|
| | CAR-15-** |

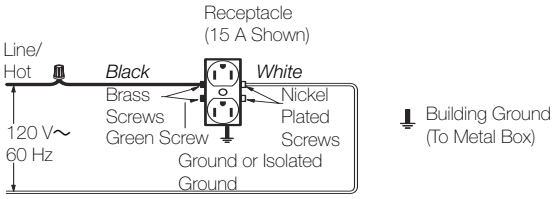


## Wiring Diagram 13

| GFCI Receptacle Wiring | Model # |
|---|---|
| | CAR-15-GFST-** |

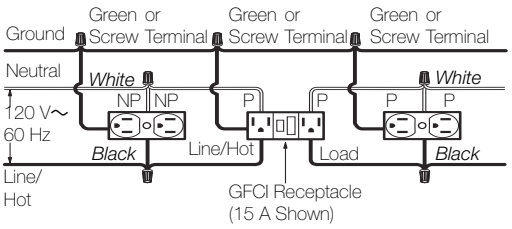


P - Protected
NP - Not Protected

Wire Connectors

The Lutron logo, Lutron, Diva, Claro, Hi-lume, Eco-10, and Satin Colors are trademarks or registered trademarks of Lutron Electronics Co., Inc. in the US and/or other countries.

All other product names, logos, and brands are property of their respective owners.



| Job Name: | Model Numbers: |
|---|---|
| Job Number: | |