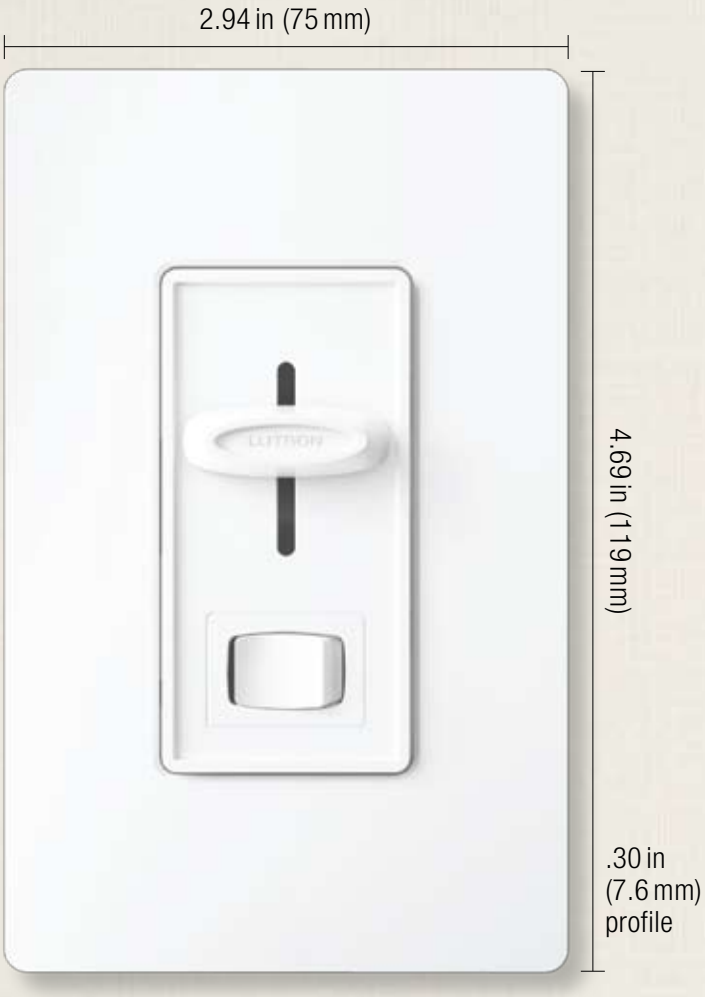

Shown actual size: Skylark dimmer and 1-gang Claro wallplate in White (WH).

Product family features

- Rocker switch returns light to your favorite light level
- Slide up to brighten, down to dim (adjust light to suit any activity)
- eco-dim® model available
- 1000 W preset dimmers have voltage compensation which maintains stable light levels, despite line voltage variations
- 100% factory tested
- Coordinating Claro® and Stainless Steel wallplates only available separately
- Custom engraving available for wallplates, see pg. 155

Control types

Single-pole (one location)

3-way or 4-way (two or more locations)

Direct load type compatibility

Incandescent/halogen lighting

Magnetic low-voltage lighting

Electronic low-voltage lighting

Fluorescent lighting

LED lighting

Dimmable compact fluorescent

Ceiling fans

Ceiling fan/lights

Load type requiring load interface

Neon/cold cathode lighting

Lighting load interfaces may be applicable for some additional load type, voltage and capacity combinations.
For additional information, see pg. 174.

Available finishes

Use **BOLD** color code in model number (Example: S-600P-**GR**)

Gloss finishes*

WH
White

LA
Light Almond

AL
Almond

IV
Ivory

GR
Gray

BR
Brown

BL
Black

SS
Stainless Steel

*Coordinating wallplates only available separately. For wallplate information, see pg. 160.

Stainless Steel wallplate includes black plastic trim/adapter, visible from side. Match with separate Black (BL) controls.

Dimmers

Slide-to-off dimmers

- Slide up to on/brighten; down to dim/off

Dimmers with on/off switch

- Rocker switch turns on/off
- Slide up to brighten; down to dim
- eco-dim® model guarantees at least 15% energy savings compared to a standard switch

Dimmers with on/off switch and locator light

- Rocker switch turns on/off
- Slide up to brighten; down to dim
- Includes amber locator light

Fan and fan/light controls

Slide-to-off fan controls

- Slide up to on/increase speed; down to decrease/off
- 3-quiet fan speeds for increased comfort
- For use with only one ceiling paddle fan
- Quiet 3-speed designed to prevent motor hum
- Fully variable model also available

Slide-to-off fan controls with on/off light switch

Fan control (top)

- Slide up to on/increase fan speed; down to decrease fan speed/off
- 3-quiet fan speeds for increased comfort
- For use with only one ceiling paddle fan
- Quiet 3-speed designed to prevent motor hum

Switch (bottom)

- Rocker switch turns light on/off

Dual devices

Dual slide-to-off dimmers (two loads)

Dimmers (left/right)

- Slide up to on/brighten; down to dim/off

Dual slide-to-off fan control and dimmer

Fan control (left)

- Slide up to on/increase speed; down to decrease/off
- 3-quiet fan speeds for increased comfort
- Quiet 3-speed designed to prevent motor hum
- Fully variable available for use with multiple paddle or exhaust fans

Dimmer (right)

- Slide up to on/brighten; down to dim/off

Connections overview

Load connections*

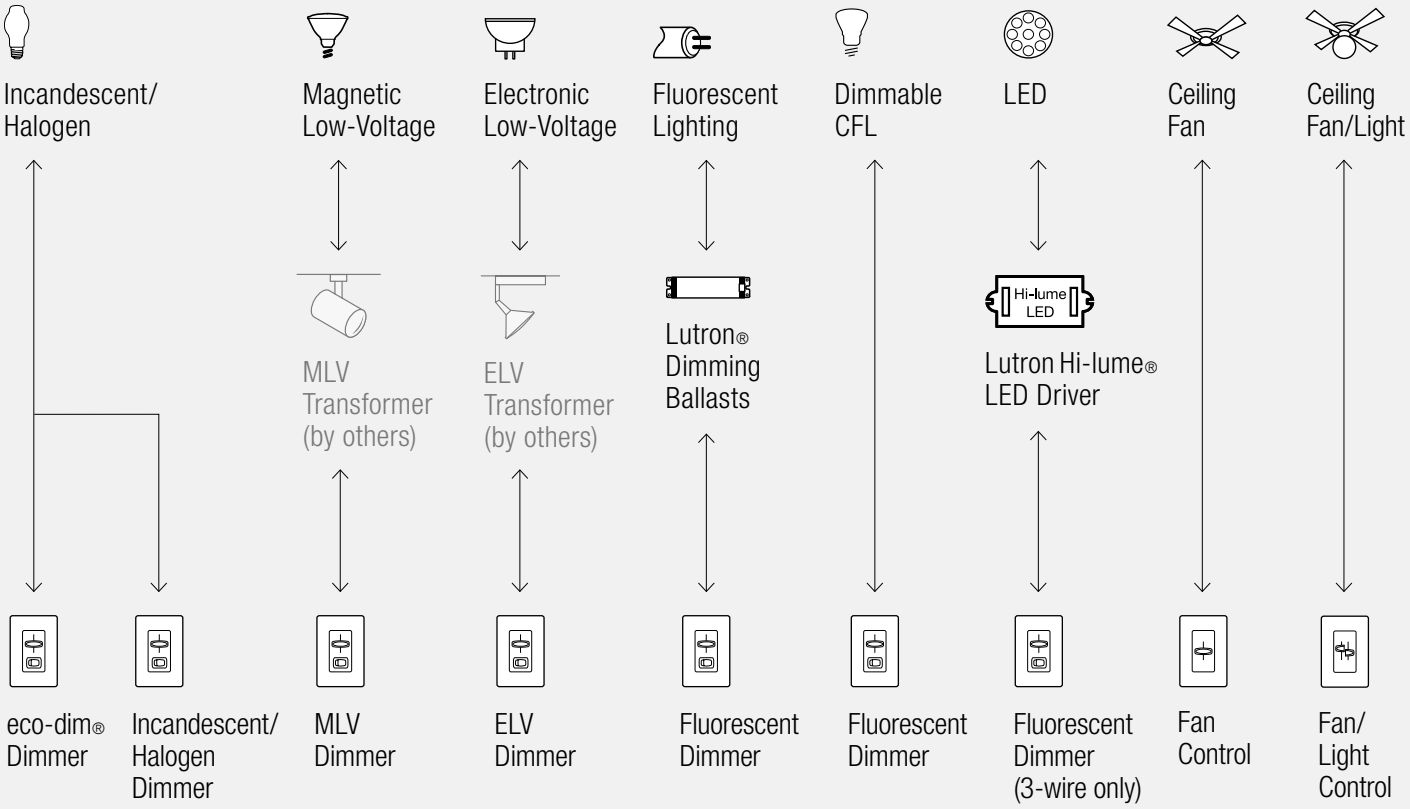

Control types (for 2 or more locations)

Dim from one location, switch from the others

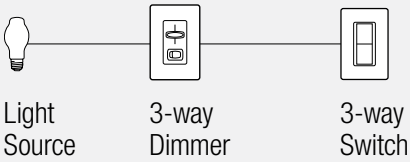

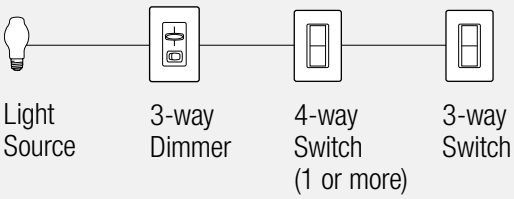

For more information on ballasts, visit **www.lutron.com/ballasts**.
For more information on LED drivers, visit **www.lutron.com/LED**.

*__For illustration purposes only.__ Consult model number pages for specific voltage and capacity information.

Dimmer model numbers

Incandescent/halogen dimmers

Dimmers with on/off switch

Single-pole 120V 600W	S-600P-**CC**[3]
Single-pole 120V 1000W	S-10P-**CC**[3]
3-way 120V 600W	S-603P-**CC**[3]
3-way 120V 1000W	S-103P-**CC**[3]

eco-dim® dimmer with on/off switch

3-way/single-pole 120V 600W	S-603PG-**EE**[2]

eco-dim model guarantees at least 15% energy savings compared to a standard switch.

Dimmers with on/off switch and locator light

Single-pole 120V 600W	S-600PNL-**CC**[3]
Single-pole 120V 1000W	S-10PNL-**CC**[3]
3-way 120V 600W	S-603PNL-**CC**[3]
3-way 120V 1000W	S-103PNL-**CC**[3]

Slide-to-off dimmers

Single-pole 120V 600W	S-600-**CC**[3]
Single-pole 120V 1000W	S-1000-**CC**[3]

For dual slide-to-off dimmers (two loads), see page 111.

Magnetic low-voltage dimmers

Dimmers with on/off switch

Single-pole 120V 600VA (450W)	SLV-600P-**CC**[3]
3-way 120V 600VA (450W)	SLV-603P-**CC**[3]

The stated VA (Volt-Ampere) rating includes the magnetic transformer heat losses and the lamp load. The stated W (Watt) rating is the maximum lamp wattage based on assumed 20% transformer loss.

Electronic low-voltage dimmers*

Dimmers with on/off switch

Single-pole 120V 300W	SELV-300P-**CC**[3]
3-way 120V 300W	SELV-303P-**CC**[3]

Certain LED drivers are dimmable using an ELV dimmer, for more information, visit **www.lutron.com/LED**.

CC[3]: Gloss color codes, see pg. 105
EE[2]: Available in White (WH), Ivory (IV), Almond (AL) and Light Almond (LA)
(Wallplates not included, order separately, see pg. 160)

All models must be derated if ganged unless otherwise noted, see pg. 170.

*Requires neutral wire connection.

Dimmer model numbers

3-wire fluorescent dimmers*

Dimmers with on/off switch

Single-pole 120V 8A	SF-10P-**CC**[3]
Single-pole 277V 6A	SF-12P-277-**CC**[3]
3-way 120V 8A	SF-103P-**CC**[3]
3-way 277V 6A	SF-12P-277-3-**CC**[3]

For use with Hi-lume®, Hi-lume® Compact SE, Hi-lume® 3D, Eco-10®, EcoSystem® ballasts.

No derating required if ganged.

Adjustable low-end trim.

Hi-lume® LED drivers: 3-wire fluorescent dimmers*

Dimmers with on/off switch

Single-pole 120V 8A	SF-10P-**CC**[3]
Single-pole 277V 6A	SF-12P-277-**CC**[3]
3-way 120V 8A	SF-103P-**CC**[3]
3-way 277V 6A	SF-12P-277-3-**CC**[3]

For use with Hi-lume LED driver only.

For more information on Hi-lume LED drivers, visit **www.lutron.com/HilumeLED**.

No derating required if ganged.

Adjustable low-end trim.

Tu-Wire® fluorescent dimmers

Dimmers with on/off switch

3-way/single-pole 120V 5A	SFTU-5A3P-**CC**[3]

Also compatible with Advance Mark X ballasts, for further information, visit **www.lutron.com/advance**.

For information on use with Universal and OSRAM ballasts, contact Technical Support at 1.800.523.9466.

CC[3]: Gloss color codes, see pg. 105 (Wallplates not included, order separately, see pg. 160)

For more information on ballasts, visit **www.lutron.com/ballasts**.
All models must be derated if ganged unless otherwise noted, see pg. 170.

*__Requires neutral wire connection.__

Fan control model numbers

Fan controls

Slide-to-off fan controls—quiet 3-speed

Single-pole SFSQ-F-**CC**[3]
120V 1.5A

Single-pole SFSQ-F-HO-**CC**[3]
120V 2.0A

For use with only one ceiling paddle fan.

SFSQ-F-HO- for use with Hunter Original Series.

Slide-to-off fan control—fully variable

Single-pole SFS-5E-**CC**[3]
120V 5A

For use with multiple ceiling paddle fans or exhaust fans.

Fan/light controls

Fan control—quiet 3-speed and dimmer

Single-pole fan control S2-LFSQ-**CC**[3]
120V 1.5A (left)
120V single-pole dimmer 300W (right)

For use with only one ceiling paddle fan.

Fan control—fully variable and dimmer

Single-pole fan control S2-LF-**CC**[3]
120V 2.5A (left)
120V single-pole dimmer 300W (right)

For use with multiple ceiling paddle fans.

Fan control/light switch

Fan control—quiet 3-speed and switch

Single-pole fan control SFSQ-LF-**CC**[3]
120V 1.5A (top)
120V single-pole switch 360W (bottom)
(incandescent/halogen loads only)

CC[3]: Gloss color codes, see pg. 105
(Wallplates not included, order separately, see pg. 160)

All models must be derated if ganged unless otherwise noted, see pg. 170.

*Requires neutral wire connection.

Dual device model numbers

Incandescent/halogen and Incandescent/halogen dimmers

Dual slide-to-off dimmers (two loads)

Single-pole 120 V 300 W light (left) incandescent/halogen 120 V 300 W light (right) incandescent/halogen	S2-L-**CC**[3]

Replacement knob model numbers

Knobs

Single-pole Standard knob	SK-**EE**[2]
Split knobs	contact customer service

CC[3]: Gloss color codes, see pg. 105 (Wallplates not included, order separately, see pg. 160)

EE[2]: Available in White (WH), Ivory (IV), Almond (AL) and Light Almond (LA)

All models must be derated if ganged unless otherwise noted, see pg. 170.

Accessories

Wallplates

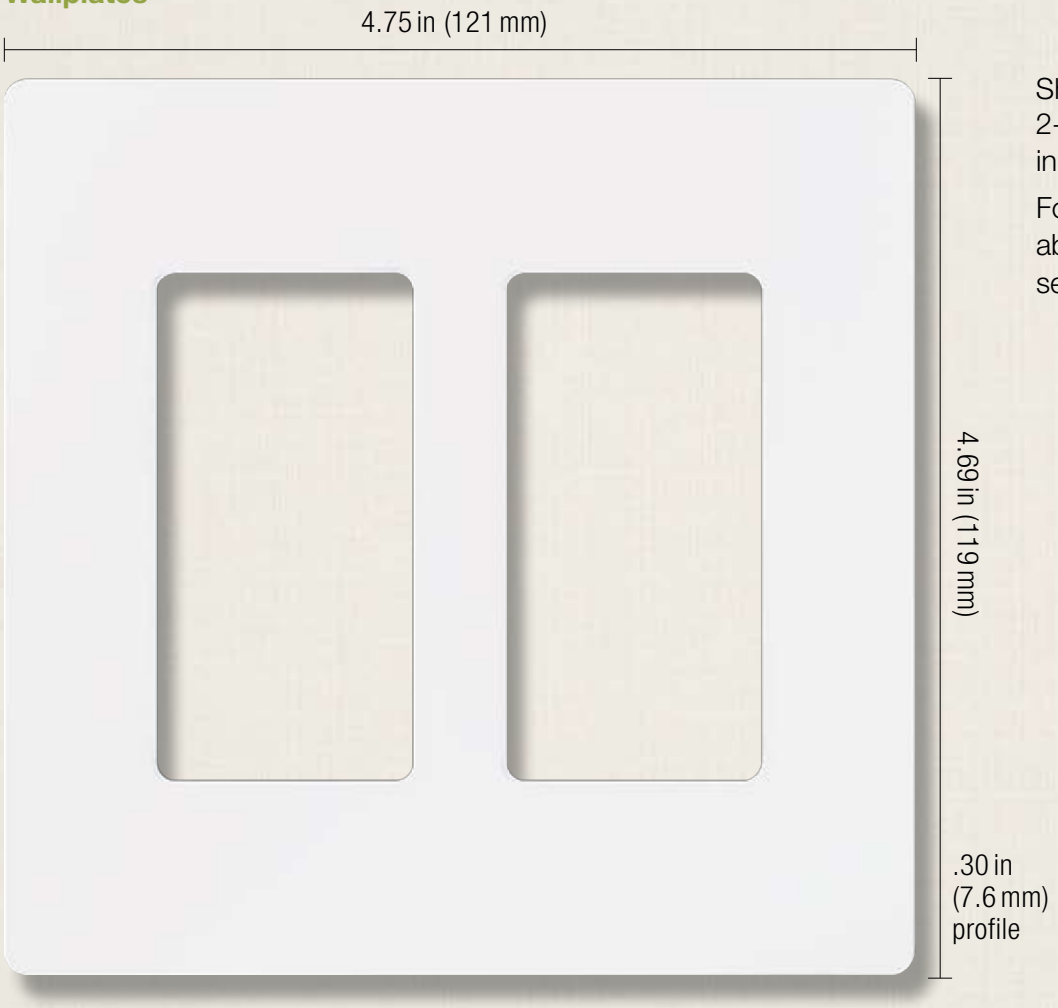

Shown actual size: 2-gang Claro® wallplate in White (WH).

For more information about Designer wallplates, see pg. 160.

Coordinated electrical devices

Tamper resistant GFCI receptacle

Customizable 6-port frame

Cable jack

For more information about coordinated Designer electrical devices, see pg. 163.

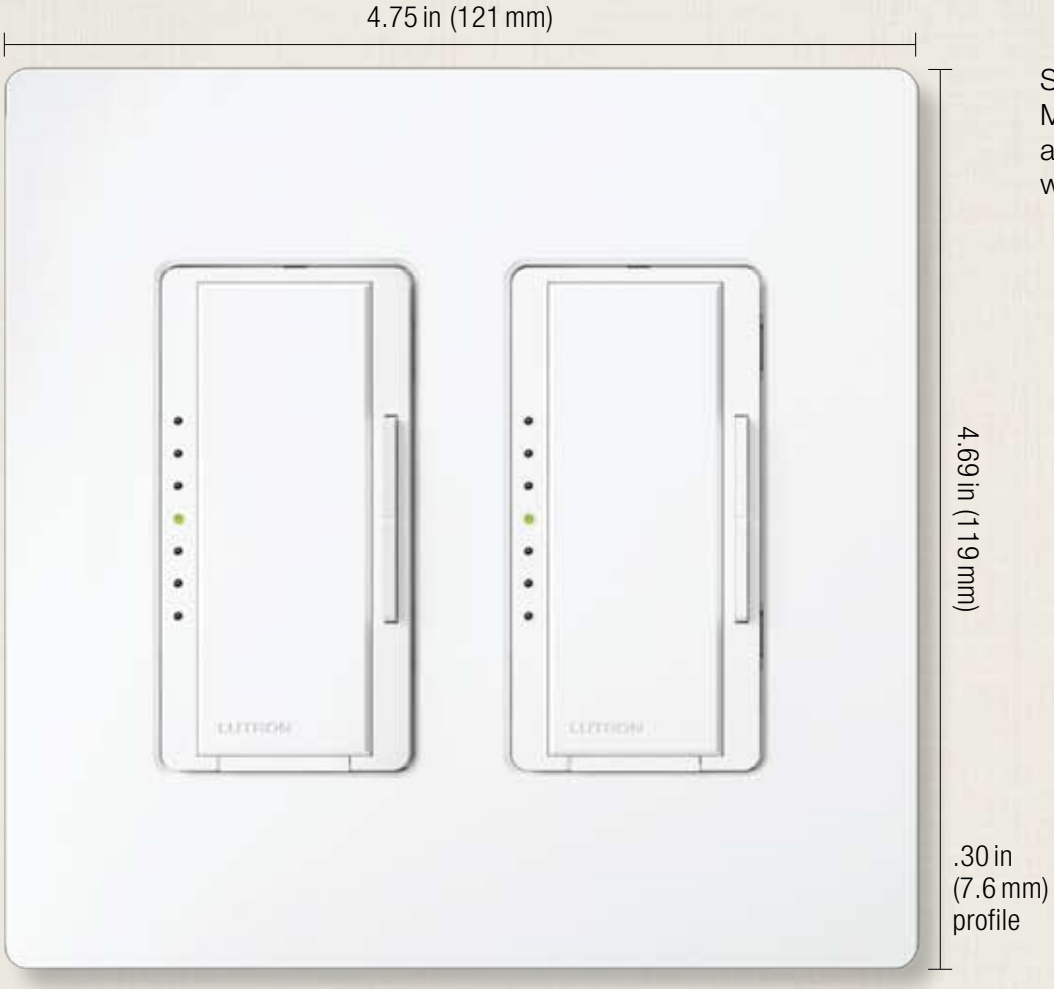

Shown actual size: Maestro dimmers and 2-gang Claro wallplate in White (WH).

Product family features

- Can be used in conjunction with the following dimmer(s) and switch(es): Maestro®, Maestro IR®, Maestro Wireless®, Pico™ wireless control, Spacer System®, Diva®, Lyneo® Lx, Skylark®, Skylark Contour™
- All Lutron® wallplates are screwless, seamless and have no visible hardware; the front plate securely snaps into the alignment adapter plate
- Full line of wiring devices in designer style opening
- Blank inserts available for Gloss colors (DV-BI-) and Satin colors (SC-BI-)
- Customize your designer wallplate with engraving, contact customer service to get started at 1.888.LUTRON1

Ganging and derating

- Designer wallplates use standard ganging
- Requires fins to be removed from dimmers for proper spacing (“Fins Broken” ganging), see pg. 170
- May require derating (i.e., reduction of dimmer capacity due to fin removal), see Derating Tables, pg. 172

Available finishes

Use **BOLD** color code in model number (Example: SC-1-**PL**)

Gloss finishes

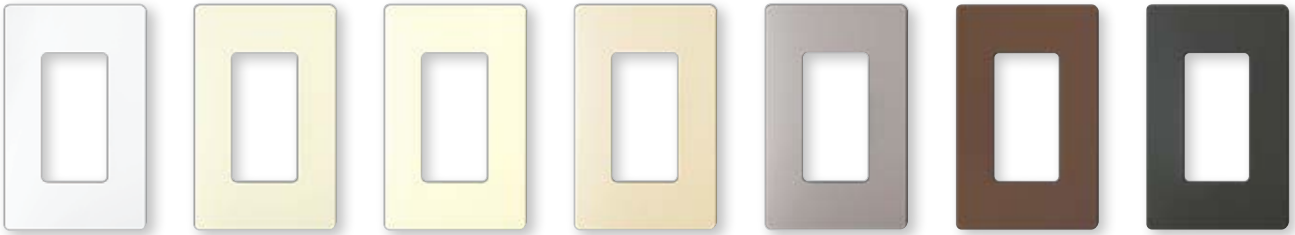

WH White
LA Light Almond
AL Almond
IV Ivory
GR Gray
BR Brown
BL Black

Satin finishes

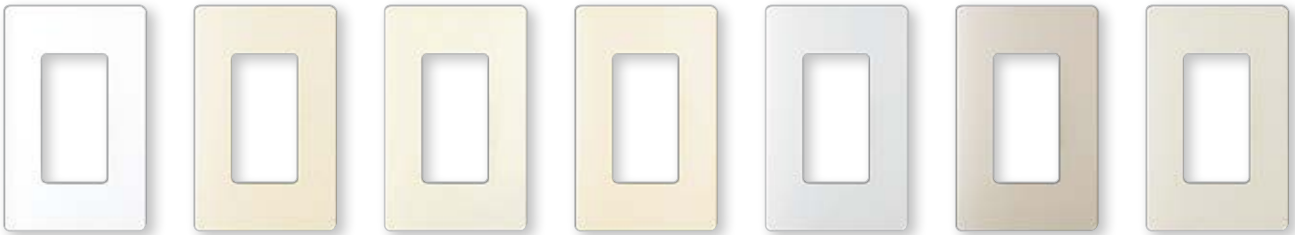

SW Snow
LS Limestone
BI Biscuit
ES Eggshell
PD Palladium
TP Taupe
ST Stone

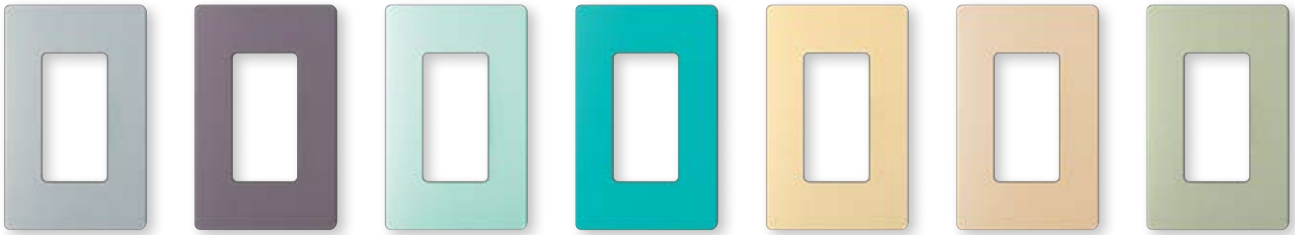

BG Bluestone
PL Plum
SG Sea Glass
TQ Turquoise
GS Goldstone
DS Desert Stone
GB Greenbriar

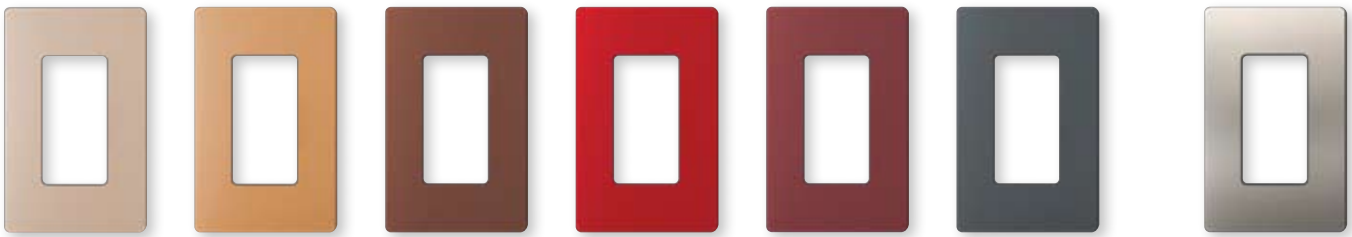

MS Mocha Stone
TC Terracotta
SI Sienna
HT Hot
MR Merlot
MN Midnight
SS Stainless Steel*

*Stainless Steel finish wallplates include black plastic trim/adapter, visible from side. Match with separate Black (BL) or Midnight (MN) controls and accessories.

Wallplates for Maestro®, Maestro IR®, Maestro Wireless®, Pico™ wireless control, Spacer System®, Diva®, Lyneo® Lx, Skylark® and Skylark Contour™

1-gang* CW-1-**CC²** SC-1-**CC⁴**

W: 2.94 in (75 mm); H: 4.69 in (119 mm)
D: .30 in (7.6 mm)



2-gang* CW-2-**CC²** SC-2-**CC⁴**

W: 4.75 in (121 mm); H: 4.69 in (119 mm);
D: .30 in (7.6 mm)

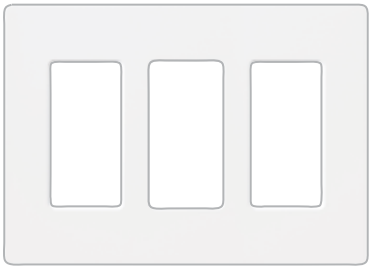

3-gang* CW-3-**CC²** SC-3-**CC⁴**

W: 6.56 in (167 mm); H: 4.69 in (119 mm);
D: .30 in (7.6 mm)

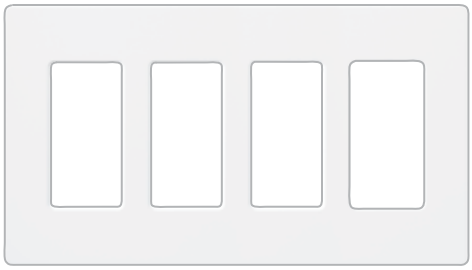

4-gang* CW-4-**CC²** SC-4-**CC⁴**

W: 8.37 in (213 mm); H: 4.69 in (119 mm);
D: .30 in (7.6 mm)

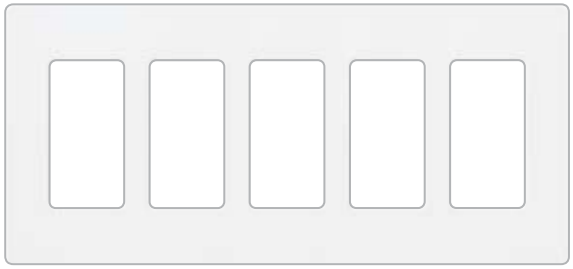

5-gang* CW-5-**CC²** SC-5-**CC⁴**

W: 10.18 in (259 mm); H: 4.69 in (119 mm);
D: .30 in (7.6 mm)

Multiple devices with line and low-voltage can be mounted behind a common wallplate using a standard barrier backbox, see Application Note #213 (Combining Low-Voltage and Line Voltage Wiring Devices in a Multi-Gang Box) at **www.lutron.com/applicationnotes**.

CC²: Gloss and Stainless Steel color codes, see pg. 161
CC⁴: Satin color codes, see pg. 161

Multi-gang dimmer installations may require derating, see pg. 170.

*Stainless Steel finish wallplates include black plastic trim/adapter, visible from side. Match with separate Black (BL) or Midnight (MN) controls and accessories.

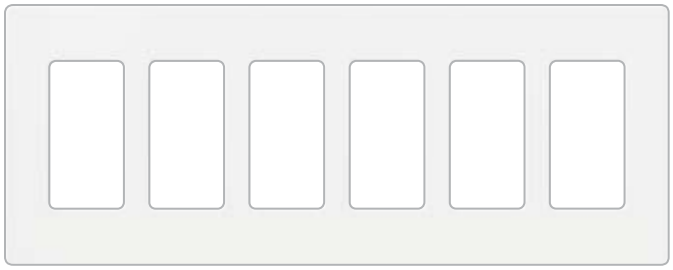

6-gang*	CW-6-**CC**[2] SC-6-**CC**[4]

W: 12.00 in (305 mm); H: 4.69 in (119 mm);
D: .30 in (7.6 mm)

Cable jacks

- F-style, 75-Ohm coaxial cable

Single cable jack*	CA-CJH-**CC**[3] SC-CJ-**CC**[4]

Telephone jacks

- 6-conductor telephone jack, RJ11

Single telephone jack*	CA-PJH-**CC**[3] SC-PJ-**CC**[4]

CC[2]: Gloss and Stainless Steel color codes, see pg. 161
CC[3]: Gloss color codes, see pg. 161
CC[4]: Satin color codes, see pg. 161

Receptacles

Tamper resistant receptacles

15 A, 125 V*	CARS-15-TR-**CC**[3] SCRS-15-TR-**CC**[4]
20 A, 125 V*	SCRS-20-TR-**CC**[4]

Receptacles

15 A, 125 V*	CAR-15H-**CC**[3] SCR-15-**CC**[4]
20 A, 125 V*	SCR-20-**CC**[4]

GFCI Receptacles

- Press test button to confirm LED indicator status
- Press reset button to reset GFCI after circuit interruption

Tamper resistant GFCI receptacles

15 A, 125 V*	GFCI	CAR-15-GFTR-**CC**[3] SCR-15-GFTR-**CC**[4]
20 A, 125 V*	GFCI	SCR-20-GFTR-**CC**[4]

*Stainless Steel finish only available as separate wallplate. Match with separate Black (BL) or Midnight (MN) controls and accessories.

Receptacles for dimming use

- Duplex for dimming both connected loads
- Projecting nubs prevent standard plugs from being used
- Requires replacement plugs for dimming use

Duplex for dimming use

15 A	120/125 V*	CAR-15-DFDU-**CC²**
15 A	120/125 V*	SCR-15-DFDU-**CC⁴**
20 A	120/125 V*	CAR-20-DFDU-**CC²**
20 A	120/125 V*	SCR-20-DFDU-**CC⁴**

Receptacles for dimming use

- Top half for dimming
- Projecting nub prevents standard plug from being used
- Requires replacement plugs for dimming use
- Bottom half is a general use receptacle and will fit standard duplex plugs

Split duplex (half for dimming use)

15 A	120/125 V*	CAR-15-HFDU-**CC²**
15 A	120/125 V*	SCR-15-HFDU-**CC⁴**
20 A	120/125 V*	CAR-20-HFDU-**CC²**
20 A	120/125 V*	SCR-20-HFDU-**CC⁴**

Receptacles for dimming use

- Duplex for dimming both connected loads
- Projecting nubs prevent standard plugs from being used
- Requires replacement plugs for dimming use
- 15 A model shown
- Tamper resistant shutter mechanism

Dual dimming tamper resistant

15 A	120/125 V*	CAR-15-DDTR-**CC²**
15 A	120/125 V*	SCR-15-DDTR-**CC⁴**
20 A	120/125 V*	CAR-20-DDTR-**CC²**
20 A	120/125 V*	SCR-20-DDTR-**CC⁴**

Receptacles for dimming use

- Top half for dimming
- Projecting nub prevents standard plug from being used
- Requires replacement plugs for dimming use
- Bottom half is a general use receptacle and will fit standard duplex plugs
- 15 A model shown
- Tamper resistant shutter mechanism

Half dimming tamper resistant

15 A	120/125 V*	CAR-15-HDTR-**CC²**
15 A	120/125 V*	SCR-15-HDTR-**CC⁴**
20 A	120/125 V*	CAR-20-HDTR-**CC²**
20 A	120/125 V*	SCR-20-HDTR-**CC⁴**

CC²: Gloss color code and Stainless Steel, see pg. 161
CC⁴: Satin color codes, see pg. 161

*Stainless Steel finish only available as separate wallplate. Match with separate Black (BL) or Midnight (MN) controls and accessories.

Replacement plug for dimming (use with receptacles on left)

- This plug required for use with Lutron® receptacles for dimming use—plug will work in standard receptacle
- Easily replaces the existing plugs on lamps

120/125 V White	RP-FDU-10-WH
120/125 V Brown	RP-FDU-10-BR

UL/CSA/NOM regulatory approvals.

Important notes

- If the hot and dimmed hot feeds to the split duplex HFDU are supplied from different circuits or split-wired with separate switch-legs, a means to simultaneously disconnect these circuits must be provided at the panel board where they originate (NEC 210.7(C) 2002 Edition). A 2-pole circuit breaker or two single-pole circuit breakers with an approved handle tie can be used to accomplish this simultaneous disconnect. Feed-through dimming panels, which are those without breakers, are recommended when using the HFDU.
- Receptacles and plugs for dimming use are UL listed for use with all Lutron® wallbox dimmers included in this catalog.
- If there is only one electrical feed to the receptacle, then the duplex DFDU must be used.
- For detailed information, see Application Notes #91 (Guide to Dimming Table Lamps) and #109 (Guide to Dimming Portable Lamps via Receptacles) at **www.lutron.com/applicationnotes**.

CC²: Gloss color code and Stainless Steel, see pg. 161
CC⁴: Satin color codes, see pg. 161

*Stainless Steel finish only available as separate wallplate. Match with separate Black (BL) or Midnight (MN) controls and accessories.

Field customizable 6-port frame

- Shipped with six blanks in matching colors
- Connectors and wallplate sold separately
- Connectors snap in (no tools required)
- Connectors available in White (WH), unless noted

6-port frame*	CA-6PF-**CC**[3] SC-6PF-**CC**[4]

Connectors for 6-port frame

Telephone/network jacks

8-conductor, RJ45 category 3	CON-1P-C3-**EE**[4]
8-conductor, RJ45 category 5e	CON-1P-C5E-**EE**[4]
8-conductor, RJ45 category 6	CON-1P-C6-**EE**[4]

Fiber jacks

MT-RJ feed through	CON-1F-MTRJ-WH
SC simplex	CON-1F-SC-WH
LC non-flush mount	CON-1F-LC-WH
ST style	CON-1F-ST-WH

Cable jack

F-style, 75-Ohm coaxial cable	CON-1C-**EE**[4]

BNC jack

BNC connector, 50-Ohm	CON-1B-WH

Connectors only for use with 6-port frame.

Switches

- Paddle turns on/off
- Use with any 15A load
- General purpose switching of all sources and motor loads
- No derating if ganged

General purpose switches (120/277V)

Single-pole	15A*	CA-1PSH-**CC**[3] SC-1PS-**CC**[4]
3-way	15A*	CA-3PSH-**CC**[3] SC-3PS-**CC**[4]
4-way	15A*	CA-4PSH-**CC**[3] SC-4PS-**CC**[4]

General purpose switch with locator light (120V only)

Single-pole	15A*	CA-1PSNL-**EE**[2] SC-1PSNL-**EE**[10]
3-way	15A*	CA-3PSNL-**EE**[2] SC-3PSNL-**EE**[10]
4-way	15A*	CA-4PSNL-**EE**[2] SC-4PSNL-**EE**[10]

CC[3]: Gloss color codes, see pg. 161
CC[4]: Satin color codes, see pg. 161
EE[2]: Only available in Almond (AL), Ivory (IV), Light Almond (LA) and White (WH)
EE[4]: Only available in White (WH) and Black (BL)
EE[10]: Available in Biscuit (BI), Eggshell (ES), Goldstone (GS), Limestone (LS), Sea Glass (SG) and Snow (SW)

*Stainless Steel finish only available as separate wallplate. Match with separate Black (BL) or Midnight (MN) controls and accessories.

How to understand ganging and derating

Standard ganging

Ganging is the side-by-side mounting of two or more dimmers or accessory devices under a multi-gang wallplate.

Standard multi-gang installation:

- Uses standard multi-gang electrical backboxes
- Uses standard multi-gang wallplates
- Requires fins to be removed from dimmers for proper spacing ("Fins Broken" ganging)
- May require derating (i.e., reduction of dimmer capacity due to fin removal), see Derating Tables, pgs. 172–173

Custom ganging for Architectural style controls

For Architectural style dimmers and switches, it is possible to retain the maximum capacity of dimmers in multi-gang applications via custom architectural multi-gang:

- May require customized, wider-than-standard wallplates
- May require wider-than-standard electrical backboxes
- Allows full capacity ("No Fins Broken") ganging
- Required for Nova® dimmers and for larger width (high capacity) architectural controls
- Visit **www.lutron.com/customganging** for additional information

Standard ganging for dimmers, switches and accessories

New Architectural



pg. 148



Vierti®

Derating Table 1
pg. 172

Architectural



pg. 152



Vareo®
Nova T☆®

Derating Table 2
pg. 173

Designer



pg. 160



Maestro®
Maestro IR®
Maestro Wireless®
Spacer System®
Diva®
Lyneo® Lx
Skylark®
Skylark Contour™

Derating Table 1
pg. 172

Traditional



pg. 166



Abella®
Ceana®
Ariadni®
Glyder®
Rotary

Derating Table 1
pg. 172

Standard ganging and fins broken derating examples:



One Nova T☆® dimmer

=



No fins broken
Full capacity

+



Standard 1-gang backbox

+



Standard 1-gang architectural wallplate



Two Nova T☆ dimmers
"Fins Broken" ganging

=



One fin broken*
Partial derating

+



Standard 2-gang backbox

+



Standard 2-gang architectural wallplate



Three Nova T☆ dimmers
"Fins Broken" ganging

=



Inside: Two fins broken*
Full derating

Outside: One fin broken*
Partial derating

+



Standard 3-gang backbox

+



Standard 3-gang architectural wallplate

Custom Architectural ganging example:



Two Nova T☆ dimmers
"No Fins Broken" ganging

=



No fins broken
Full capacity

+



Backbox with chase nipple

+



Custom architectural wallplate

For further information on ganging and derating, visit **www.lutron.com/multigang**.

*The fins are scored and designed to be removed easily.

Derating Table 1

New Architectural | Vierti®
Designer | Maestro®, Maestro IR®, Maestro Wireless®, Spacer System®, Diva®, Lyneo® Lx, Skylark Contour™, Skylark®
Traditional | Abella®, Ceana®, Ariadni®, Glyder®, Rotary

	No fins broken	1 fin broken	2 fins broken
Incandescent			
Dimmers	600W	500W	400W
	1000W	800W	650W
Dual dimmers	300W	250W	200W
	300W	250W	200W
Magnetic low-voltage			
Dimmers	600VA/450W	500VA/400W	400VA/300W
	1000VA/800W	800VA/650W	650VA/500W
Electronic low-voltage			
Dimmers	300W	250W	200W
	500W	450W	400W
	600W	500W	400W
Fluorescent			
Hi-lume®/Hi-lume® Compact SE/Eco-10®/EcoSystem®			
Vierti	60 ballasts/6A	50 ballasts/5A	35 ballasts/3.5A
Maestro/Spacer System	20 ballasts/6A	20 ballasts/5A	20 ballasts/3.5A
Diva, Skylark, Lyneo Lx and Ariadni	no derating	no derating	no derating
Tu-Wire®: Spacer System, Diva, Skylark	5A	4A	3.3A
Fan controls			
Quiet 7-speed	1.0A/300W	1.0A/300W	1.0A/300W
Quiet 3-speed	1.5A	1.5A	1.5A
Fully variable	5A	4A	3A
Fan/light controls			
Quiet 7-speed	1.0A/300W	1.0A/300W	1.0A/300W
Quiet 3-speed	1.5A/300W	1.5A/300W	1.5A/300W
	1.5A/360W	1.5A/360W	1.5A/360W
Fully variable	2.5A/300W	2.1A/250W	1.7A/200W
Electronic switches			
Vierti	6A/3A	5A/3A	3.5A/3A
Maestro (light/fan)	8A/3A	6.5A/3A	5A/3A
Abella (light/fan)	6A/3A	5A/3A	3.5A/3A

Derating Table 2

Architectural | Vareo®, Nova T☆®

	No fins broken	1 fin broken	2 fins broken
Incandescent			
Dimmers	600W	500W	300W
	1000W	900W	700W
	1500W	1250W	1000W
	1950W	–	–
Magnetic low-voltage			
Dimmers	600VA/450W	500VA/400W	300VA/250W
	1000VA/800W	900VA/750W	700VA/500W
	1500VA/1200W	1250VA/1000W	1000VA/800W
Electronic low-voltage			
Dimmers	300W	300W	250W
	600W	500W	400W
Fluorescent			
Hi-lume®/Hi-lume® Compact SE/Eco-10®/EcoSystem®			
Vareo	20 ballasts/8A	20 ballasts/6A	20 ballasts/4.5A
Nova T☆	6A	no derating	no derating
	8A	no derating	no derating
	16A	no derating	no derating
0-10VDC control[1]	30mA ballasts	no derating	no derating
Tu-Wire®	5A	4A	3.3A
Fan controls			
Quiet 3-speed	1.5A	no derating	no derating
Fully variable	6A	4.2A	2.5A
Fully variable	12A	10A	8.3A
Electronic tapswitches[2]			
VETS-1000-	1000W	800W	650W
VETS-1000-SL-	1000W	900W	700W
VETN-1000-	1000VA	700VA	550VA

For further information on ganging Nova®, visit **www.lutron.com/customganging**.

[1]PowerPack required for line voltage switching.
[2]VETS-R-Auxiliary electronic tapswitches do not require derating.

Dimmer capabilities and interface requirements

- Ⓜ Multi-location—true dimming from each location
- Ⓔ eco-model available
- Compatible dimmer (no interface)
- WBX TVI 3F PA Requires interface, see notes below

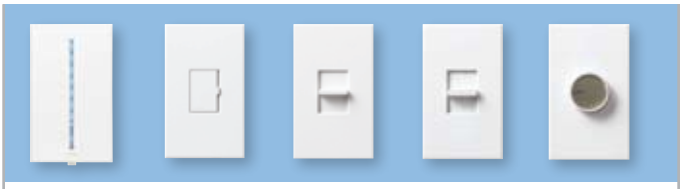

Dimmers	capacity†	Vierti®* pg. 14	Vareo® pg. 20	Nova T☆® pg. 26	Nova® pg. 34	Centurion® pg. 42
Incandescent/halogen 120V	600W			Ⓜ		
	1000W			Ⓜ		
	1500W		WBX			
	2000W		WBX			
Magnetic low-voltage 120V	600VA (450W)					
	1000VA (800W)					
	1500VA (1200W)		WBX			
	2000VA (1600W)		WBX	WBX		
Magnetic low-voltage 277V	600VA (450W)		WBX		WBX	
	1000VA (800W)		WBX		WBX	
Electronic low-voltage 120V	300W		WBX			
	450W		WBX	WBX		
	600W		WBX		WBX	
Electronic low-voltage 277V	16A		WBX	WBX	WBX	
Neon/cold cathode			WBX	WBX		
3-wire ballasts and Hi-lume® LED driver 120V	6A					
Hi-lume, Hi-lume Compact SE,	8A					
Eco-10® and EcoSystem® ballasts	16A		3F			
3-wire ballasts and Hi-lume LED driver 277V	6A		3F			
Hi-lume, Hi-lume Compact SE,	8A		3F			
Eco-10 and EcoSystem ballasts	16A		3F	3F	3F	
Tu-Wire® ballasts 120V	5A		PA			
0-10VDC (ballasts or LED Drivers) 120/277V	16A	TVI	TVI			

WBX: Wallbox Phase Adaptive Power Module (PHPM-WBX-DV-WH)

3F: Fluorescent Power Module (PHPM-3F-DV-WH)

TVI: 0-10V Interface (GRX-TVI)

PA: Phase Adaptive Power Module (PHPM-PA-DV-WH)

See pgs. 178–179 for specific compatible dimmer models and switching interface solutions.

*Consult Lutron Technical Support for information on interfaces with Vierti.

†UL listed for FULL wattage indicated (derate capacity only if ganged with other devices).

Dimmer capabilities and interface requirements

- Ⓜ Multi-location—true dimming from each location
- Ⓔ eco-model available
- Compatible dimmer (no interface)
- WBX TVI 3F PA Requires interface, see notes below

Dimmers	capacity†	Maestro® pg. 46	Maestro IR® pg. 60	Maestro Wireless® pg. 68	Spacer System® pg. 76	Diva® pg. 86
		Ⓜ	Ⓜ	Ⓜ	Ⓜ	
Incandescent/halogen 120V	600W	Ⓔ				Ⓔ
	1000W					
	1500W	WBX		WBX	WBX	WBX
	2000W	WBX		WBX	WBX	WBX
Magnetic low-voltage 120V	600VA (450W)					
	1000VA (800W)					
	1500VA (1200W)	WBX		WBX	WBX	WBX
	2000VA (1600W)	WBX		WBX	WBX	WBX
Magnetic low-voltage 277V	600VA (450W)	WBX		WBX	WBX	WBX
	1000VA (800W)	WBX		WBX	WBX	WBX
Electronic low-voltage 120V	300W			WBX		
	450W			WBX		WBX
	600W			WBX		WBX
Electronic low-voltage 277V	16A	WBX		WBX	WBX	WBX
Neon/cold cathode				WBX		WBX
3-wire ballasts and Hi-lume® LED driver 120V	6A					
Hi-lume, Hi-lume Compact SE,	8A	3F		3F	3F	
Eco-10® and EcoSystem® ballasts	16A	3F		3F	3F	3F
3-wire ballasts and Hi-lume LED driver 277V	6A					
Hi-lume, Hi-lume Compact SE,	8A	3F		3F	3F	3F
Eco-10 and EcoSystem ballasts	16A	3F		3F	3F	3F
Tu-Wire® ballasts 120V	5A	PA		PA		
0-10VDC (ballasts or LED Drivers) 120/277V	16A	TVI		TVI	TVI	TVI

WBX: Wallbox Phase Adaptive Power Module (PHPM-WBX-DV-WH)

3F: Fluorescent Power Module (PHPM-3F-DV-WH)

TVI: 0-10V Interface (GRX-TVI)

PA: Phase Adaptive Power Module (PHPM-PA-DV-WH)

See pgs. 178–179 for specific compatible dimmer models and switching interface solutions.

†UL listed for FULL wattage indicated (derate capacity only if ganged with other devices).

Dimmer capabilities and interface requirements

Ⓜ Multi-location—true dimming from each location
Ⓔ eco-model available
Compatible dimmer (no interface)
WBX TVI 3F PA Requires interface, see notes below

Dimmers	capacity†	Lyneo® Lx pg. 94	Skylark Contour™ pg. 100	Skylark® pg. 104	Abella® pg. 114
					Ⓜ
Incandescent/halogen 120V	600W		Ⓔ	Ⓔ	
	1000W				
	1500W	WBX		WBX	
	2000W	WBX		WBX	
Magnetic low-voltage 120V	600VA (450W)				
	1000VA (800W)			WBX	
	1500VA (1200W)	WBX		WBX	
	2000VA (1600W)	WBX		WBX	
Magnetic low-voltage 277V	600VA (450W)	WBX		WBX	
	1000VA (800W)	WBX		WBX	
Electronic low-voltage 120V	300W				
	450W			WBX	
	600W			WBX	
Electronic low-voltage 277V	16A	WBX		WBX	
Neon/cold cathode		WBX		WBX	
3-wire ballasts and Hi-lume® LED driver 120V	6A				
Hi-lume, Hi-lume Compact SE,	8A				
Eco-10® and EcoSystem® ballasts	16A	3F		3F	
3-wire ballasts and Hi-lume LED driver 277V	6A				
Hi-lume, Hi-lume Compact SE,	8A	3F		3F	
Eco-10 and EcoSystem ballasts	16A	3F		3F	
Tu-Wire® ballasts 120V	5A	PA			
0-10VDC (ballasts or LED Drivers) 120/277V	16A	TVI		TVI	

WBX: Wallbox Phase Adaptive Power Module (PHPM-WBX-DV-WH)
3F: Fluorescent Power Module (PHPM-3F-DV-WH)
TVI: 0-10V Interface (GRX-TVI)
PA: Phase Adaptive Power Module (PHPM-PA-DV-WH)

See pgs. 178–179 for specific compatible dimmer models and switching interface solutions.

†UL listed for FULL wattage indicated (derate capacity only if ganged with other devices).

Dimmer capabilities and interface requirements

- Ⓜ Multi-location—true dimming from each location
- Ⓔ eco-model available
- Compatible dimmer (no interface)
- WBX TVI 3F PA Requires interface, see notes below

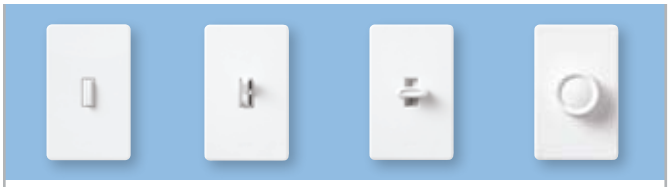

Ceana® pg. 120	Ariadni® pg. 124	Glyder® pg. 130	Rotary pg. 134

Dimmers	capacity†				
Incandescent/halogen 120V	600W		Ⓔ		Ⓔ
	1000W				
	1500W		WBX		
	2000W		WBX		
Magnetic low-voltage 120V	600VA (450W)				
	1000VA (800W)				
	1500VA (1200W)		WBX		
	2000VA (1600W)		WBX		
Magnetic low-voltage 277V	600VA (450W)		WBX		
	1000VA (800W)		WBX		
Electronic low-voltage 120V	300W		WBX		
	450W		WBX		
	600W		WBX		
Electronic low-voltage 277V	16A		WBX		
Neon/cold cathode			WBX		
3-wire ballasts and Hi-lume® LED driver 120V	6A				
Hi-lume, Hi-lume Compact SE,	8A				
Eco-10® and EcoSystem® ballasts	16A		3F		
3-wire ballasts and Hi-lume LED driver 277V	6A				
Hi-lume, Hi-lume Compact SE,	8A		3F		
Eco-10 and EcoSystem ballasts	16A		3F		
Tu-Wire® ballasts 120V	5A		PA		
0-10VDC (ballasts or LED Drivers) 120/277V	16A		TVI		

WBX: Wallbox Phase Adaptive Power Module (PHPM-WBX-DV-WH)
3F: Fluorescent Power Module (PHPM-3F-DV-WH)
TVI: 0-10V Interface (GRX-TVI)
PA: Phase Adaptive Power Module (PHPM-PA-DV-WH)

See pgs. 178–179 for specific compatible dimmer models and switching interface solutions.

†UL listed for FULL wattage indicated (derate capacity only if ganged with other devices).

Dimmer models/load interface compatibility

	Incandescent, magnetic and electronic low-voltage (120/277 V)		**3-wire Fluorescent ballasts or Hi-lume® LED drivers** (120/277 V)		**0-10 VDC Ballasts or LED drivers** (120/277 V)	
	WBX		**3F**		**TVI**	
	Wallbox Phase Adaptive Power Module* PHPM-WBX-DV-WH		Fluorescent Power Module* PHPM-3F-DV-WH		0-10 V Interface GRX-TVI	
Dimmer Family	Single-pole	3-way or multi-location	Single-pole	3-way or multi-location	Single-pole	3-way or multi-location
Abella®	–	–	–	–	–	–
Ariadni®	–	AYF-103P-	–	AYF-103P-	–	AYF-103P-
Ceana®	–	–	–	–	–	–
Diva® Gloss	–	DVF-103P-	–	DVF-103P-	–	DVF-103P-
Diva Satin Colors®	–	DVSCF-103P-	–	DVSCF-103P-	–	DVSCF-103P-
Glyder®	–	–	–	–	–	–
Lyneo® Lx	–	LXF-103PL-	–	LXF-103PL-	–	LXF-103PL-
Maestro® Gloss	–	MAF-6AM-	–	MAF-6AM-	–	MAF-6AM-
Maestro® Satin Colors®	–	MSCF-6AM-	–	MSCF-6AM-	–	MSCF-6AM-
Maestro Wireless®	–	MRF2-F6AN-DV-	–	MRF2-F6AN-DV-	–	MRF2-F6AN-DV-
Nova®	NF-10-	NF-103P-	NF-10-	NF-103P-	NF-10-	NF-103P-
Nova T☆®	NTF-10-	NTF-103P-	NTF-10-	NTF-103P-	NTF-10-	NTF-103P-
Skylark®	SF-10P-	SF-103P-	SF-10P-	SF-103P-	SF-10P-	SF-103P-
Spacer System®	–	SPSF-6AM-	–	SPSF-6AM-	SPSF-S6A-	SPSF-6AM-
Vareo®	–	VF-10-	–	VF-10-	–	VF-10-
Vierti®	contact Lutron		contact Lutron		–	VTF-6AM-

Use only dimmer model numbers listed.

*Dual 120/277 V model given, 120 V only versions are also available.
Please see Technical notes, pg. 179.

Dimmer models/load interface compatibility

	Tu-Wire® Fluorescent Ballasts (120V)		**Switched Lighting** (120/277V)	
	PA		**SW**	
	Phase Adaptive Power Module* PHPM-PA-DV-WH		Switching Power Module* PHPM-SW-DV-WH	
Dimmer Family	Single-pole	3-way or multi-location	Single-pole	3-way or multi-location
Abella®	–	–	–	AB-S6AM-
Ariadni®	–	AYF-103P-	–	–
Ceana®	–	–	–	–
Diva® Gloss	–	DVF-103P-	–	–
Diva Satin Colors®	–	DVSCF-103P-	–	–
Glyder®	–	–	–	–
Lyneo® Lx	–	LXF-103PL-	LX-1PSL-	LX-3PSL-
Maestro® Gloss	–	MAF-6AM-	–	MA-S8AM-
Maestro® Satin Colors®	–	MSCF-6AM-	–	MSC-S8AM-
Maestro Wireless®	–	MRF2-F6AN-DV-	–	MRF2-6ANS-
Nova®	NF-10-	NF-103P-	–	–
Nova T☆®	NTF-10-	NTF-103P-	–	–
Skylark®	SF-10P-	SF-103P-	–	–
Spacer System®	SPSF-S6A-	SPSF-6AM-	SPSF-S6A-	SPSF-S6AM-
Vareo®	–	VF-10-	–	VETN-1000-
Vierti®	contact Lutron		contact Lutron	

Use only dimmer model numbers listed.

*Dual 120/277V model given, 120V only versions are also available. Please see Technical notes, pg. 179.

Technical notes

- Lighting load interfaces must be matched to load type and voltage
- All load interfaces for dimmed load are controlled by a 120V 3-wire fluorescent dimmer
- Power feed to dimmer may differ from lighting load/interface voltage
- Interfaces typically require additional power feeds
- For wiring information, consult wiring diagrams, see pgs. 193-195
- For assistance and additional solutions, consult Lutron Technical Support at 1.800.523.9466 (24 hours/7 days)

Interface mounting

- PHPM interfaces mount to 2-gang electrical backbox (W: 6.30in x H: 5.10in)
- GRX-TVI enclosure is surface mount only (W: 6.10in x H: 12.50in x D: 3.30in)

Skylark Contour™

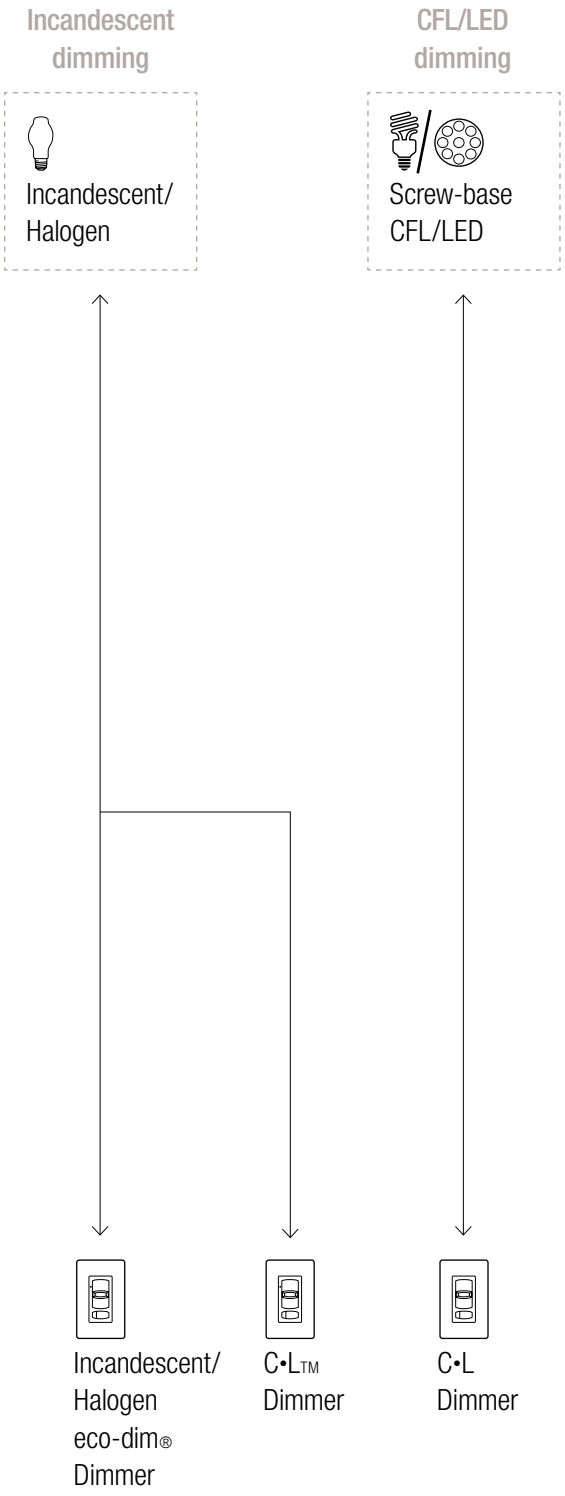

For illustration purposes only. Consult model number pages for specific voltage and capacity information.

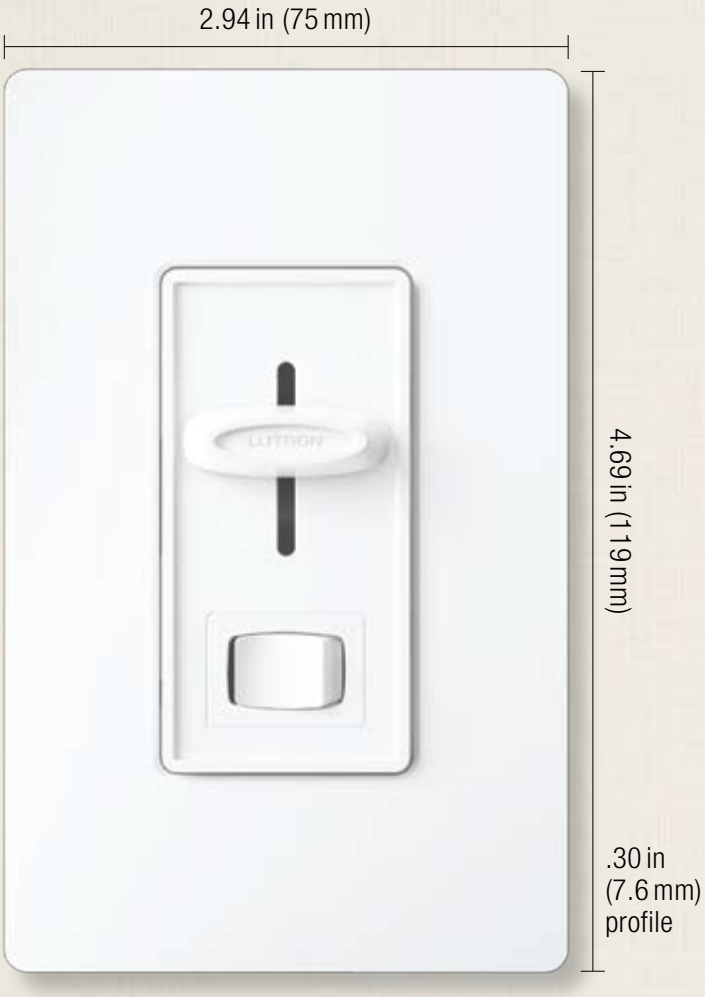

Shown actual size: Skylark dimmer and 1-gang Claro wallplate in White (WH).

Product family features

- Rocker switch returns light to your favorite light level
- Slide up to brighten, down to dim (adjust light to suit any activity)
- eco-dim® model available
- 1000 W preset dimmers have voltage compensation which maintains stable light levels, despite line voltage variations
- 100% factory tested
- Coordinating Claro® and Stainless Steel wallplates only available separately
- Custom engraving available for wallplates, see pg. 155

Control types

Single-pole (one location)

3-way or 4-way (two or more locations)

Direct load type compatibility

Incandescent/halogen lighting

Magnetic low-voltage lighting

Electronic low-voltage lighting

Fluorescent lighting

LED lighting

Dimmable compact fluorescent

Ceiling fans

Ceiling fan/lights

Load type requiring load interface

Neon/cold cathode lighting

Lighting load interfaces may be applicable for some additional load type, voltage and capacity combinations.
For additional information, see pg. 174.

Available finishes

Use **BOLD** color code in model number (Example: S-600P-**GR**)

Gloss finishes*

WH
White

LA
Light Almond

AL
Almond

IV
Ivory

GR
Gray

BR
Brown

BL
Black

SS
Stainless Steel

*Coordinating wallplates only available separately. For wallplate information, see pg. 160.

Stainless Steel wallplate includes black plastic trim/adapter, visible from side. Match with separate Black (BL) controls.

Dimmers

Slide-to-off dimmers

- Slide up to on/brighten; down to dim/off

Dimmers with on/off switch

- Rocker switch turns on/off
- Slide up to brighten; down to dim
- eco-dim® model guarantees at least 15% energy savings compared to a standard switch

Dimmers with on/off switch and locator light

- Rocker switch turns on/off
- Slide up to brighten; down to dim
- Includes amber locator light

Fan and fan/light controls

Slide-to-off fan controls

- Slide up to on/increase speed; down to decrease/off
- 3-quiet fan speeds for increased comfort
- For use with only one ceiling paddle fan
- Quiet 3-speed designed to prevent motor hum
- Fully variable model also available

Slide-to-off fan controls with on/off light switch

Fan control (top)

- Slide up to on/increase fan speed; down to decrease fan speed/off
- 3-quiet fan speeds for increased comfort
- For use with only one ceiling paddle fan
- Quiet 3-speed designed to prevent motor hum

Switch (bottom)

- Rocker switch turns light on/off

Dual devices

Dual slide-to-off dimmers (two loads)

Dimmers (left/right)

- Slide up to on/brighten; down to dim/off

Dual slide-to-off fan control and dimmer

Fan control (left)

- Slide up to on/increase speed; down to decrease/off
- 3-quiet fan speeds for increased comfort
- Quiet 3-speed designed to prevent motor hum
- Fully variable available for use with multiple paddle or exhaust fans

Dimmer (right)

- Slide up to on/brighten; down to dim/off

Connections overview

Load connections*

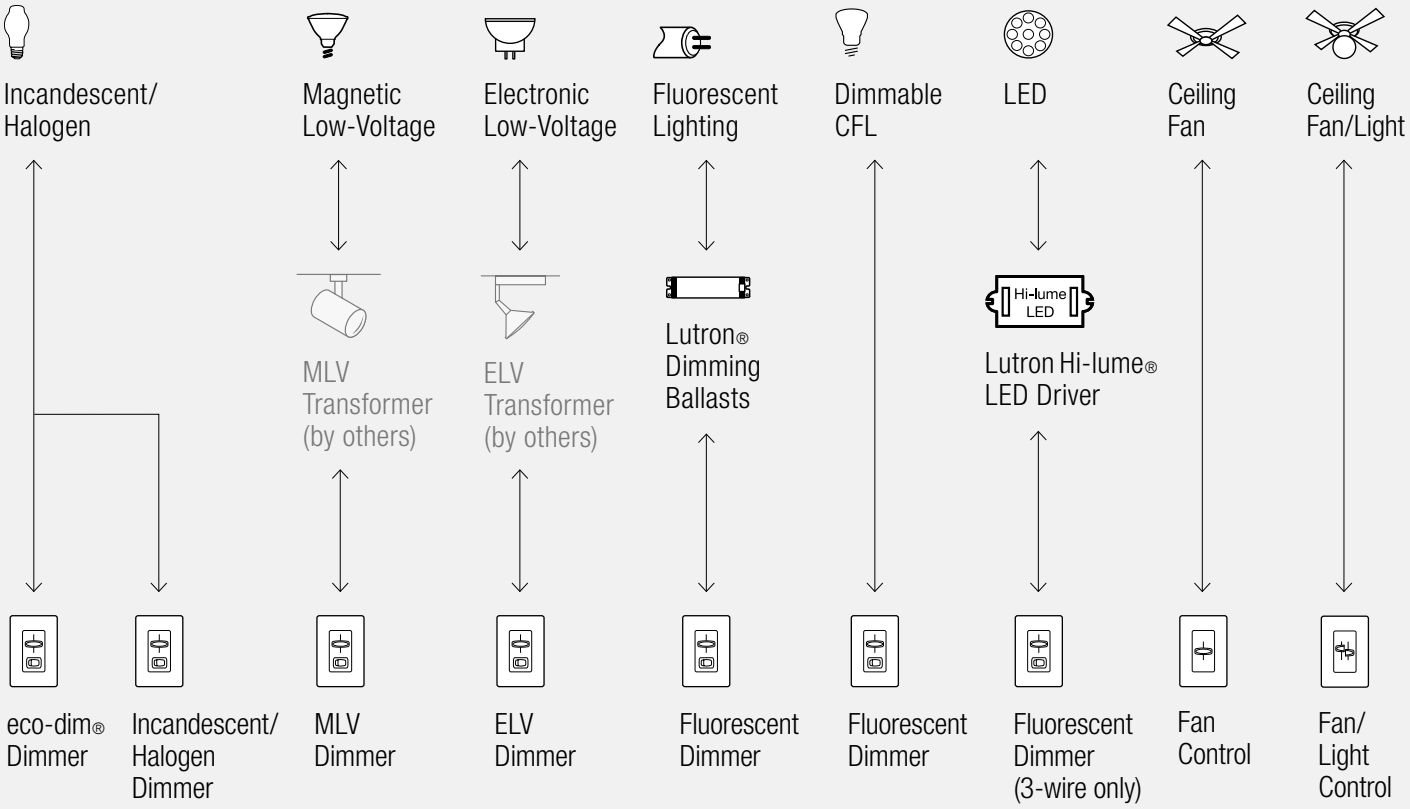

Control types (for 2 or more locations)

Dim from one location, switch from the others

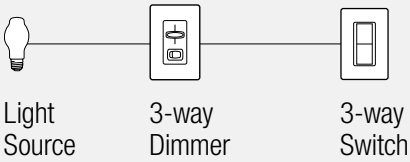

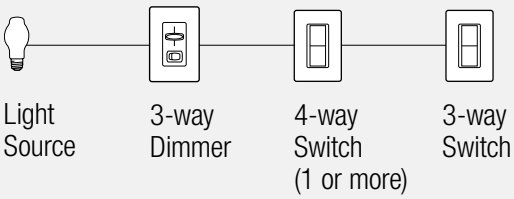

For more information on ballasts, visit **www.lutron.com/ballasts**.
For more information on LED drivers, visit **www.lutron.com/LED**.

*__For illustration purposes only.__ Consult model number pages for specific voltage and capacity information.

Dimmer model numbers

Incandescent/halogen dimmers

Dimmers with on/off switch

Single-pole 120V 600W	S-600P-**CC**[3]
Single-pole 120V 1000W	S-10P-**CC**[3]
3-way 120V 600W	S-603P-**CC**[3]
3-way 120V 1000W	S-103P-**CC**[3]

eco-dim® dimmer with on/off switch

3-way/single-pole 120V 600W	S-603PG-**EE**[2]

eco-dim model guarantees at least 15% energy savings compared to a standard switch.

Dimmers with on/off switch and locator light

Single-pole 120V 600W	S-600PNL-**CC**[3]
Single-pole 120V 1000W	S-10PNL-**CC**[3]
3-way 120V 600W	S-603PNL-**CC**[3]
3-way 120V 1000W	S-103PNL-**CC**[3]

Slide-to-off dimmers

Single-pole 120V 600W	S-600-**CC**[3]
Single-pole 120V 1000W	S-1000-**CC**[3]

For dual slide-to-off dimmers (two loads), see page 111.

Magnetic low-voltage dimmers

Dimmers with on/off switch

Single-pole 120V 600VA (450W)	SLV-600P-**CC**[3]
3-way 120V 600VA (450W)	SLV-603P-**CC**[3]

The stated VA (Volt-Ampere) rating includes the magnetic transformer heat losses and the lamp load. The stated W (Watt) rating is the maximum lamp wattage based on assumed 20% transformer loss.

Electronic low-voltage dimmers*

Dimmers with on/off switch

Single-pole 120V 300W	SELV-300P-**CC**[3]
3-way 120V 300W	SELV-303P-**CC**[3]

Certain LED drivers are dimmable using an ELV dimmer, for more information, visit **www.lutron.com/LED**.

CC[3]: Gloss color codes, see pg. 105
EE[2]: Available in White (WH), Ivory (IV), Almond (AL) and Light Almond (LA)
(Wallplates not included, order separately, see pg. 160)

All models must be derated if ganged unless otherwise noted, see pg. 170.

*Requires neutral wire connection.

Dimmer model numbers

3-wire fluorescent dimmers*

Dimmers with on/off switch

Single-pole 120V 8A	SF-10P-**CC**[3]
Single-pole 277V 6A	SF-12P-277-**CC**[3]
3-way 120V 8A	SF-103P-**CC**[3]
3-way 277V 6A	SF-12P-277-3-**CC**[3]

For use with Hi-lume®, Hi-lume® Compact SE, Hi-lume® 3D, Eco-10®, EcoSystem® ballasts.

No derating required if ganged.

Adjustable low-end trim.

Hi-lume® LED drivers: 3-wire fluorescent dimmers*

Dimmers with on/off switch

Single-pole 120V 8A	SF-10P-**CC**[3]
Single-pole 277V 6A	SF-12P-277-**CC**[3]
3-way 120V 8A	SF-103P-**CC**[3]
3-way 277V 6A	SF-12P-277-3-**CC**[3]

For use with Hi-lume LED driver only.

For more information on Hi-lume LED drivers, visit **www.lutron.com/HilumeLED**.

No derating required if ganged.

Adjustable low-end trim.

Tu-Wire® fluorescent dimmers

Dimmers with on/off switch

3-way/single-pole 120V 5A	SFTU-5A3P-**CC**[3]

Also compatible with Advance Mark X ballasts, for further information, visit **www.lutron.com/advance**.

For information on use with Universal and OSRAM ballasts, contact Technical Support at 1.800.523.9466.

CC[3]: Gloss color codes, see pg. 105 (Wallplates not included, order separately, see pg. 160)

For more information on ballasts, visit **www.lutron.com/ballasts**.
All models must be derated if ganged unless otherwise noted, see pg. 170.

*__Requires neutral wire connection.__

Fan control model numbers

Fan controls

Slide-to-off fan controls—quiet 3-speed

Single-pole SFSQ-F-**CC**[3]
120V 1.5A

Single-pole SFSQ-F-HO-**CC**[3]
120V 2.0A

For use with only one ceiling paddle fan.

SFSQ-F-HO- for use with Hunter Original Series.

Slide-to-off fan control—fully variable

Single-pole SFS-5E-**CC**[3]
120V 5A

For use with multiple ceiling paddle fans or exhaust fans.

Fan/light controls

Fan control—quiet 3-speed and dimmer

Single-pole fan control S2-LFSQ-**CC**[3]
120V 1.5A (left)
120V single-pole dimmer 300W (right)

For use with only one ceiling paddle fan.

Fan control—fully variable and dimmer

Single-pole fan control S2-LF-**CC**[3]
120V 2.5A (left)
120V single-pole dimmer 300W (right)

For use with multiple ceiling paddle fans.

Fan control/light switch

Fan control—quiet 3-speed and switch

Single-pole fan control SFSQ-LF-**CC**[3]
120V 1.5A (top)
120V single-pole switch 360W (bottom)
(incandescent/halogen loads only)

CC[3]: Gloss color codes, see pg. 105
(Wallplates not included, order separately, see pg. 160)

All models must be derated if ganged unless otherwise noted, see pg. 170.

*Requires neutral wire connection.

Dual device model numbers

Incandescent/halogen and Incandescent/halogen dimmers

Dual slide-to-off dimmers (two loads)

Single-pole 120 V 300 W light (left) incandescent/halogen 120 V 300 W light (right) incandescent/halogen	S2-L-**CC**[3]

Replacement knob model numbers

Knobs

Single-pole Standard knob	SK-**EE**[2]
Split knobs	contact customer service

CC[3]: Gloss color codes, see pg. 105 (Wallplates not included, order separately, see pg. 160)

EE[2]: Available in White (WH), Ivory (IV), Almond (AL) and Light Almond (LA)

All models must be derated if ganged unless otherwise noted, see pg. 170.

Accessories

Wallplates

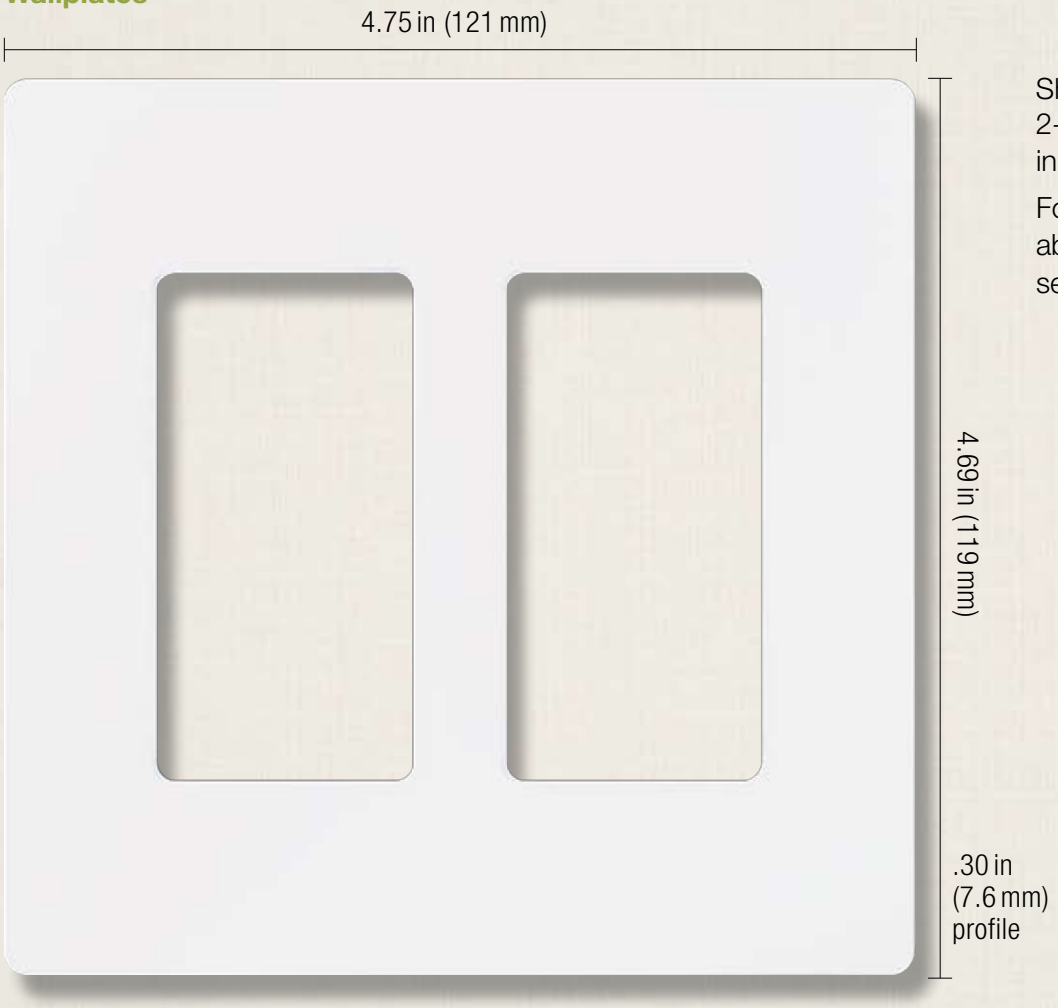

Shown actual size: 2-gang Claro® wallplate in White (WH).

For more information about Designer wallplates, see pg. 160.

Coordinated electrical devices

Tamper resistant GFCI receptacle

Customizable 6-port frame

Cable jack

For more information about coordinated Designer electrical devices, see pg. 163.

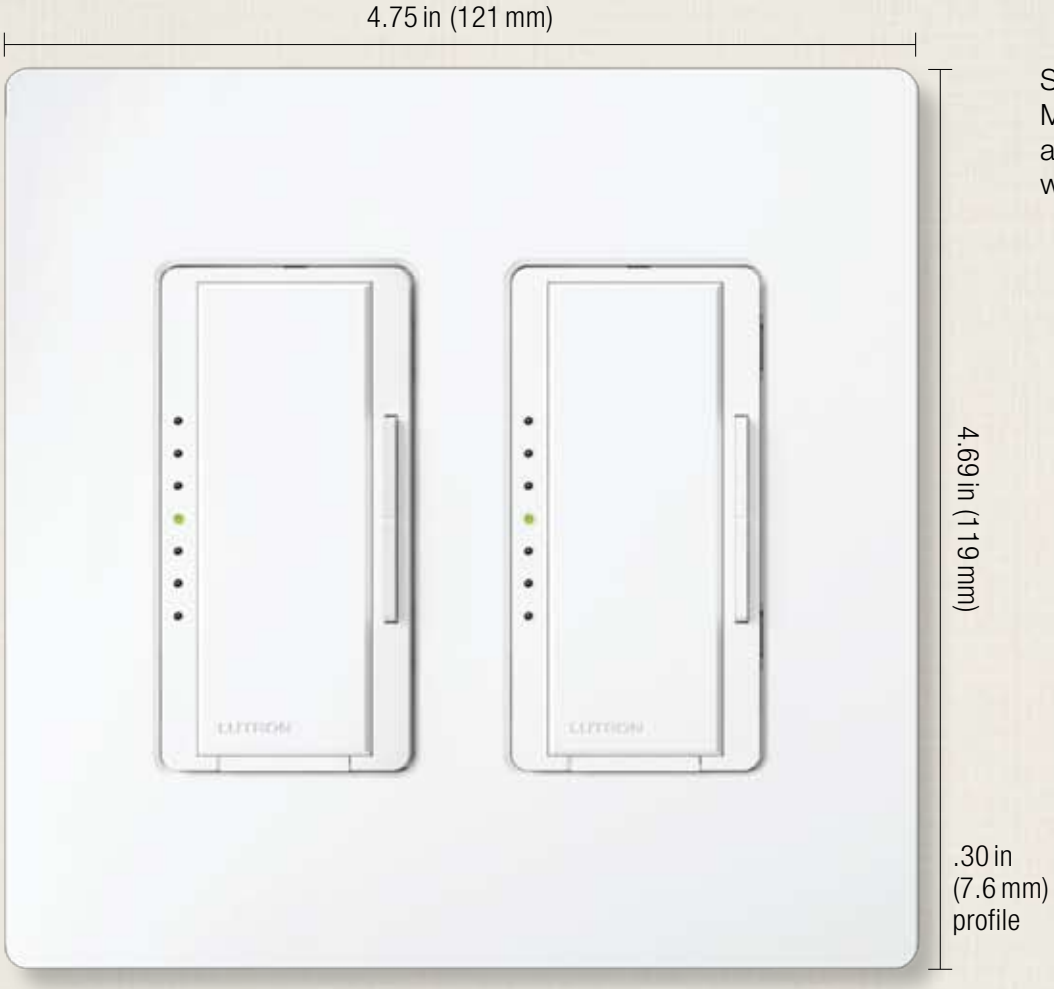

Shown actual size: Maestro dimmers and 2-gang Claro wallplate in White (WH).

Product family features

- Can be used in conjunction with the following dimmer(s) and switch(es): Maestro®, Maestro IR®, Maestro Wireless®, Pico™ wireless control, Spacer System®, Diva®, Lyneo® Lx, Skylark®, Skylark Contour™
- All Lutron® wallplates are screwless, seamless and have no visible hardware; the front plate securely snaps into the alignment adapter plate
- Full line of wiring devices in designer style opening
- Blank inserts available for Gloss colors (DV-BI-) and Satin colors (SC-BI-)
- Customize your designer wallplate with engraving, contact customer service to get started at 1.888.LUTRON1

Ganging and derating

- Designer wallplates use standard ganging
- Requires fins to be removed from dimmers for proper spacing (“Fins Broken” ganging), see pg. 170
- May require derating (i.e., reduction of dimmer capacity due to fin removal), see Derating Tables, pg. 172

Available finishes

Use **BOLD** color code in model number (Example: SC-1-**PL**)

Gloss finishes

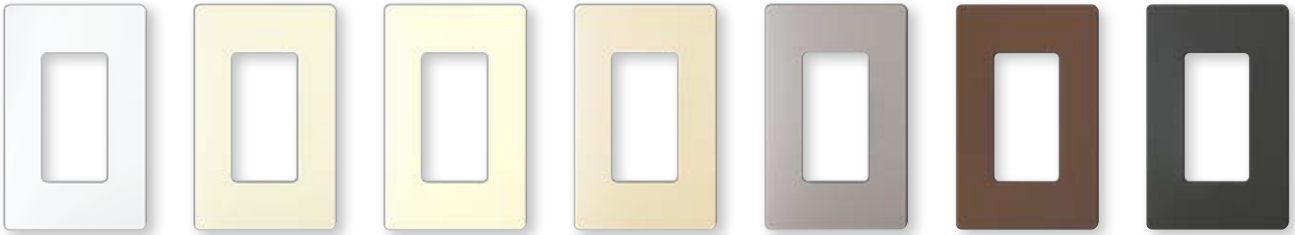

WH White
LA Light Almond
AL Almond
IV Ivory
GR Gray
BR Brown
BL Black

Satin finishes

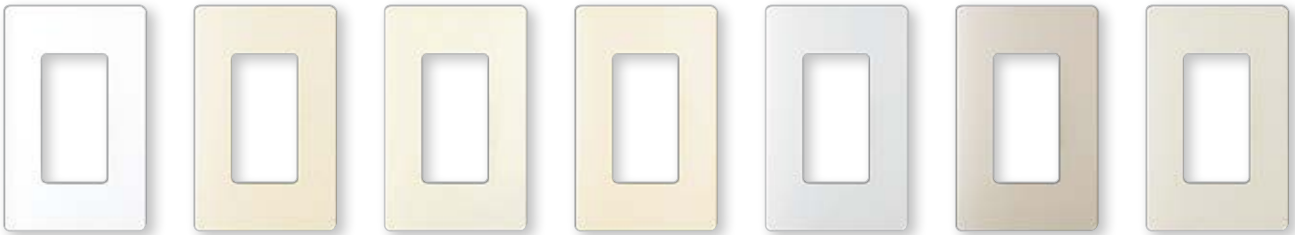

SW Snow
LS Limestone
BI Biscuit
ES Eggshell
PD Palladium
TP Taupe
ST Stone

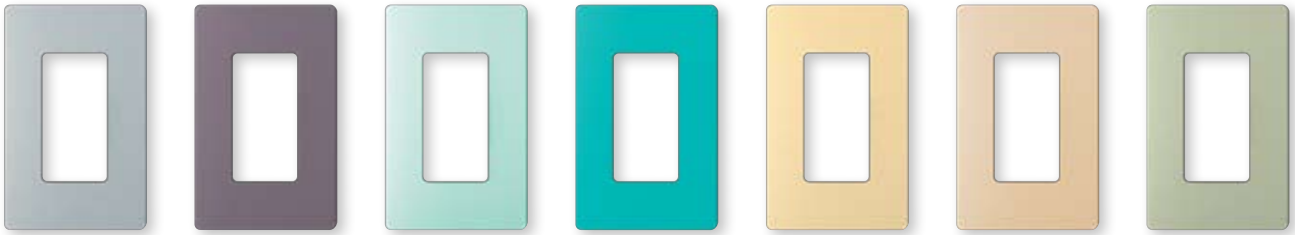

BG Bluestone
PL Plum
SG Sea Glass
TQ Turquoise
GS Goldstone
DS Desert Stone
GB Greenbriar

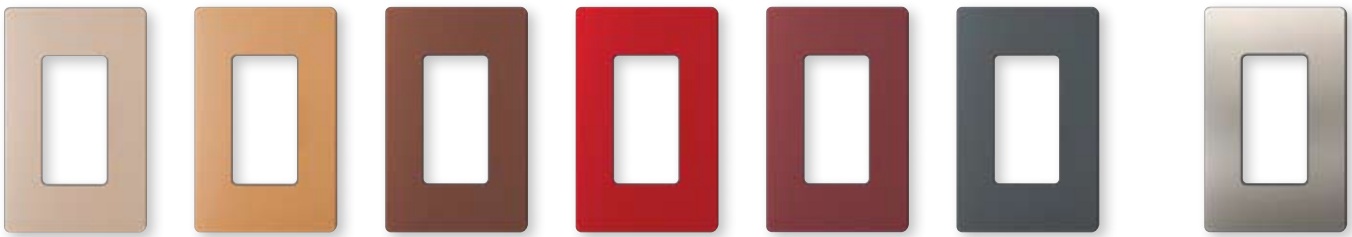

MS Mocha Stone
TC Terracotta
SI Sienna
HT Hot
MR Merlot
MN Midnight
SS Stainless Steel*

*Stainless Steel finish wallplates include black plastic trim/adapter, visible from side. Match with separate Black (BL) or Midnight (MN) controls and accessories.

Wallplates for Maestro®, Maestro IR®, Maestro Wireless®, Pico™ wireless control, Spacer System®, Diva®, Lyneo® Lx, Skylark® and Skylark Contour™

1-gang* CW-1-**CC²** SC-1-**CC⁴**

W: 2.94 in (75 mm); H: 4.69 in (119 mm)
D: .30 in (7.6 mm)



2-gang* CW-2-**CC²** SC-2-**CC⁴**

W: 4.75 in (121 mm); H: 4.69 in (119 mm);
D: .30 in (7.6 mm)

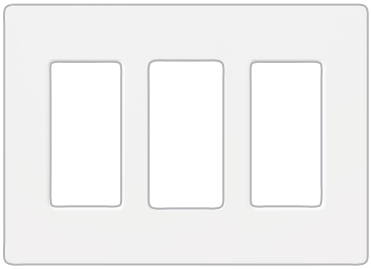

3-gang* CW-3-**CC²** SC-3-**CC⁴**

W: 6.56 in (167 mm); H: 4.69 in (119 mm);
D: .30 in (7.6 mm)

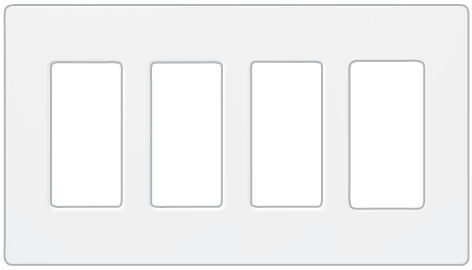

4-gang* CW-4-**CC²** SC-4-**CC⁴**

W: 8.37 in (213 mm); H: 4.69 in (119 mm);
D: .30 in (7.6 mm)

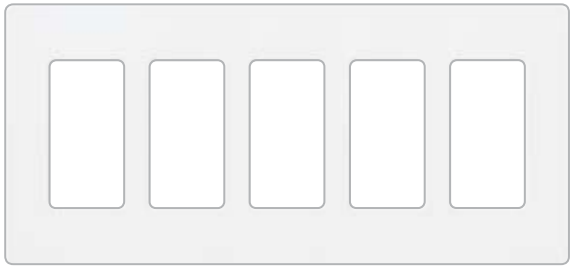

5-gang* CW-5-**CC²** SC-5-**CC⁴**

W: 10.18 in (259 mm); H: 4.69 in (119 mm);
D: .30 in (7.6 mm)

Multiple devices with line and low-voltage can be mounted behind a common wallplate using a standard barrier backbox, see Application Note #213 (Combining Low-Voltage and Line Voltage Wiring Devices in a Multi-Gang Box) at **www.lutron.com/applicationnotes**.

CC²: Gloss and Stainless Steel color codes, see pg. 161
CC⁴: Satin color codes, see pg. 161

Multi-gang dimmer installations may require derating, see pg. 170.

*Stainless Steel finish wallplates include black plastic trim/adapter, visible from side. Match with separate Black (BL) or Midnight (MN) controls and accessories.

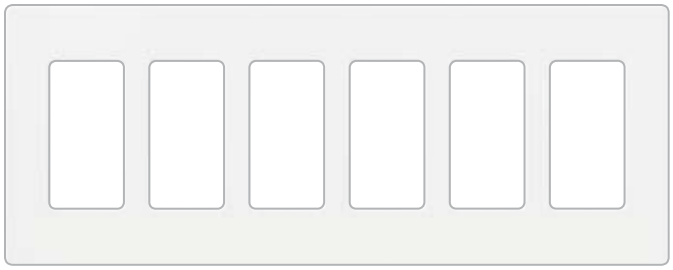

6-gang*	CW-6-**CC**[2] SC-6-**CC**[4]

W: 12.00 in (305 mm); H: 4.69 in (119 mm);
D: .30 in (7.6 mm)

Cable jacks

- F-style, 75-Ohm coaxial cable

Single cable jack*	CA-CJH-**CC**[3] SC-CJ-**CC**[4]

Telephone jacks

- 6-conductor telephone jack, RJ11

Single telephone jack*	CA-PJH-**CC**[3] SC-PJ-**CC**[4]

CC[2]: Gloss and Stainless Steel color codes, see pg. 161
CC[3]: Gloss color codes, see pg. 161
CC[4]: Satin color codes, see pg. 161

Receptacles

Tamper resistant receptacles

15 A, 125 V*	CARS-15-TR-**CC**[3] SCRS-15-TR-**CC**[4]
20 A, 125 V*	SCRS-20-TR-**CC**[4]

Receptacles

15 A, 125 V*	CAR-15H-**CC**[3] SCR-15-**CC**[4]
20 A, 125 V*	SCR-20-**CC**[4]

GFCI Receptacles

- Press test button to confirm LED indicator status
- Press reset button to reset GFCI after circuit interruption

Tamper resistant GFCI receptacles

15 A, 125 V*	GFCI	CAR-15-GFTR-**CC**[3] SCR-15-GFTR-**CC**[4]
20 A, 125 V*	GFCI	SCR-20-GFTR-**CC**[4]

*Stainless Steel finish only available as separate wallplate. Match with separate Black (BL) or Midnight (MN) controls and accessories.

Receptacles for dimming use

- Duplex for dimming both connected loads
- Projecting nubs prevent standard plugs from being used
- Requires replacement plugs for dimming use

Duplex for dimming use

15 A	120/125 V*	CAR-15-DFDU-**CC²**
15 A	120/125 V*	SCR-15-DFDU-**CC⁴**
20 A	120/125 V*	CAR-20-DFDU-**CC²**
20 A	120/125 V*	SCR-20-DFDU-**CC⁴**

Receptacles for dimming use

- Top half for dimming
- Projecting nub prevents standard plug from being used
- Requires replacement plugs for dimming use
- Bottom half is a general use receptacle and will fit standard duplex plugs

Split duplex (half for dimming use)

15 A	120/125 V*	CAR-15-HFDU-**CC²**
15 A	120/125 V*	SCR-15-HFDU-**CC⁴**
20 A	120/125 V*	CAR-20-HFDU-**CC²**
20 A	120/125 V*	SCR-20-HFDU-**CC⁴**

Receptacles for dimming use

- Duplex for dimming both connected loads
- Projecting nubs prevent standard plugs from being used
- Requires replacement plugs for dimming use
- 15 A model shown
- Tamper resistant shutter mechanism

Dual dimming tamper resistant

15 A	120/125 V*	CAR-15-DDTR-**CC²**
15 A	120/125 V*	SCR-15-DDTR-**CC⁴**
20 A	120/125 V*	CAR-20-DDTR-**CC²**
20 A	120/125 V*	SCR-20-DDTR-**CC⁴**

Receptacles for dimming use

- Top half for dimming
- Projecting nub prevents standard plug from being used
- Requires replacement plugs for dimming use
- Bottom half is a general use receptacle and will fit standard duplex plugs
- 15 A model shown
- Tamper resistant shutter mechanism

Half dimming tamper resistant

15 A	120/125 V*	CAR-15-HDTR-**CC²**
15 A	120/125 V*	SCR-15-HDTR-**CC⁴**
20 A	120/125 V*	CAR-20-HDTR-**CC²**
20 A	120/125 V*	SCR-20-HDTR-**CC⁴**

CC²: Gloss color code and Stainless Steel, see pg. 161
CC⁴: Satin color codes, see pg. 161

*Stainless Steel finish only available as separate wallplate. Match with separate Black (BL) or Midnight (MN) controls and accessories.

Replacement plug for dimming (use with receptacles on left)

- This plug required for use with Lutron® receptacles for dimming use—plug will work in standard receptacle
- Easily replaces the existing plugs on lamps

120/125 V White	RP-FDU-10-WH
120/125 V Brown	RP-FDU-10-BR

UL/CSA/NOM regulatory approvals.

Important notes

- If the hot and dimmed hot feeds to the split duplex HFDU are supplied from different circuits or split-wired with separate switch-legs, a means to simultaneously disconnect these circuits must be provided at the panel board where they originate (NEC 210.7(C) 2002 Edition). A 2-pole circuit breaker or two single-pole circuit breakers with an approved handle tie can be used to accomplish this simultaneous disconnect. Feed-through dimming panels, which are those without breakers, are recommended when using the HFDU.
- Receptacles and plugs for dimming use are UL listed for use with all Lutron® wallbox dimmers included in this catalog.
- If there is only one electrical feed to the receptacle, then the duplex DFDU must be used.
- For detailed information, see Application Notes #91 (Guide to Dimming Table Lamps) and #109 (Guide to Dimming Portable Lamps via Receptacles) at **www.lutron.com/applicationnotes**.

CC²: Gloss color code and Stainless Steel, see pg. 161
CC⁴: Satin color codes, see pg. 161

*Stainless Steel finish only available as separate wallplate. Match with separate Black (BL) or Midnight (MN) controls and accessories.

Field customizable 6-port frame

- Shipped with six blanks in matching colors
- Connectors and wallplate sold separately
- Connectors snap in (no tools required)
- Connectors available in White (WH), unless noted

6-port frame*	CA-6PF-**CC**[3] SC-6PF-**CC**[4]

Connectors for 6-port frame

Telephone/network jacks

8-conductor, RJ45 category 3	CON-1P-C3-**EE**[4]
8-conductor, RJ45 category 5e	CON-1P-C5E-**EE**[4]
8-conductor, RJ45 category 6	CON-1P-C6-**EE**[4]

Fiber jacks

MT-RJ feed through	CON-1F-MTRJ-WH
SC simplex	CON-1F-SC-WH
LC non-flush mount	CON-1F-LC-WH
ST style	CON-1F-ST-WH

Cable jack

F-style, 75-Ohm coaxial cable	CON-1C-**EE**[4]

BNC jack

BNC connector, 50-Ohm	CON-1B-WH

Connectors only for use with 6-port frame.

Switches

- Paddle turns on/off
- Use with any 15A load
- General purpose switching of all sources and motor loads
- No derating if ganged

General purpose switches (120/277V)

Single-pole	15A*	CA-1PSH-**CC**[3] SC-1PS-**CC**[4]
3-way	15A*	CA-3PSH-**CC**[3] SC-3PS-**CC**[4]
4-way	15A*	CA-4PSH-**CC**[3] SC-4PS-**CC**[4]

General purpose switch with locator light (120V only)

Single-pole	15A*	CA-1PSNL-**EE**[2] SC-1PSNL-**EE**[10]
3-way	15A*	CA-3PSNL-**EE**[2] SC-3PSNL-**EE**[10]
4-way	15A*	CA-4PSNL-**EE**[2] SC-4PSNL-**EE**[10]

CC[3]: Gloss color codes, see pg. 161
CC[4]: Satin color codes, see pg. 161
EE[2]: Only available in Almond (AL), Ivory (IV), Light Almond (LA) and White (WH)
EE[4]: Only available in White (WH) and Black (BL)
EE[10]: Available in Biscuit (BI), Eggshell (ES), Goldstone (GS), Limestone (LS), Sea Glass (SG) and Snow (SW)

*Stainless Steel finish only available as separate wallplate. Match with separate Black (BL) or Midnight (MN) controls and accessories.

How to understand ganging and derating

Standard ganging

Ganging is the side-by-side mounting of two or more dimmers or accessory devices under a multi-gang wallplate.

Standard multi-gang installation:

- Uses standard multi-gang electrical backboxes
- Uses standard multi-gang wallplates
- Requires fins to be removed from dimmers for proper spacing ("Fins Broken" ganging)
- May require derating (i.e., reduction of dimmer capacity due to fin removal), see Derating Tables, pgs. 172–173

Custom ganging for Architectural style controls

For Architectural style dimmers and switches, it is possible to retain the maximum capacity of dimmers in multi-gang applications via custom architectural multi-gang:

- May require customized, wider-than-standard wallplates
- May require wider-than-standard electrical backboxes
- Allows full capacity ("No Fins Broken") ganging
- Required for Nova® dimmers and for larger width (high capacity) architectural controls
- Visit **www.lutron.com/customganging** for additional information

Standard ganging for dimmers, switches and accessories

New Architectural



pg. 148



Vierti®

Derating Table 1
pg. 172

Architectural



pg. 152



Vareo®
Nova T☆®

Derating Table 2
pg. 173

Designer



pg. 160



Maestro®
Maestro IR®
Maestro Wireless®
Spacer System®
Diva®
Lyneo® Lx
Skylark®
Skylark Contour™

Derating Table 1
pg. 172

Traditional



pg. 166



Abella®
Ceana®
Ariadni®
Glyder®
Rotary

Derating Table 1
pg. 172

Standard ganging and fins broken derating examples:



One Nova T☆® dimmer

=



No fins broken
Full capacity

+



Standard 1-gang backbox

+



Standard 1-gang architectural wallplate



Two Nova T☆ dimmers
"Fins Broken" ganging

=



One fin broken*
Partial derating

+



Standard 2-gang backbox

+



Standard 2-gang architectural wallplate



Three Nova T☆ dimmers
"Fins Broken" ganging

=



Inside: Two fins broken*
Full derating

Outside: One fin broken*
Partial derating

+



Standard 3-gang backbox

+



Standard 3-gang architectural wallplate

Custom Architectural ganging example:



Two Nova T☆ dimmers
"No Fins Broken" ganging

=



No fins broken
Full capacity

+



Backbox with chase nipple

+



Custom architectural wallplate

For further information on ganging and derating, visit **www.lutron.com/multigang**.

*The fins are scored and designed to be removed easily.

Derating Table 1

New Architectural | Vierti®
Designer | Maestro®, Maestro IR®, Maestro Wireless®, Spacer System®, Diva®, Lyneo® Lx, Skylark Contour™, Skylark®
Traditional | Abella®, Ceana®, Ariadni®, Glyder®, Rotary

	No fins broken	1 fin broken	2 fins broken
Incandescent			
Dimmers	600W	500W	400W
	1000W	800W	650W
Dual dimmers	300W	250W	200W
	300W	250W	200W
Magnetic low-voltage			
Dimmers	600VA/450W	500VA/400W	400VA/300W
	1000VA/800W	800VA/650W	650VA/500W
Electronic low-voltage			
Dimmers	300W	250W	200W
	500W	450W	400W
	600W	500W	400W
Fluorescent			
Hi-lume®/Hi-lume® Compact SE/Eco-10®/EcoSystem®			
Vierti	60 ballasts/6A	50 ballasts/5A	35 ballasts/3.5A
Maestro/Spacer System	20 ballasts/6A	20 ballasts/5A	20 ballasts/3.5A
Diva, Skylark, Lyneo Lx and Ariadni	no derating	no derating	no derating
Tu-Wire®: Spacer System, Diva, Skylark	5A	4A	3.3A
Fan controls			
Quiet 7-speed	1.0A/300W	1.0A/300W	1.0A/300W
Quiet 3-speed	1.5A	1.5A	1.5A
Fully variable	5A	4A	3A
Fan/light controls			
Quiet 7-speed	1.0A/300W	1.0A/300W	1.0A/300W
Quiet 3-speed	1.5A/300W	1.5A/300W	1.5A/300W
	1.5A/360W	1.5A/360W	1.5A/360W
Fully variable	2.5A/300W	2.1A/250W	1.7A/200W
Electronic switches			
Vierti	6A/3A	5A/3A	3.5A/3A
Maestro (light/fan)	8A/3A	6.5A/3A	5A/3A
Abella (light/fan)	6A/3A	5A/3A	3.5A/3A

Derating Table 2

Architectural | Vareo®, Nova T☆®

	No fins broken	1 fin broken	2 fins broken
Incandescent			
Dimmers	600W	500W	300W
	1000W	900W	700W
	1500W	1250W	1000W
	1950W	–	–
Magnetic low-voltage			
Dimmers	600VA/450W	500VA/400W	300VA/250W
	1000VA/800W	900VA/750W	700VA/500W
	1500VA/1200W	1250VA/1000W	1000VA/800W
Electronic low-voltage			
Dimmers	300W	300W	250W
	600W	500W	400W
Fluorescent			
Hi-lume®/Hi-lume® Compact SE/Eco-10®/EcoSystem®			
Vareo	20 ballasts/8A	20 ballasts/6A	20 ballasts/4.5A
Nova T☆	6A	no derating	no derating
	8A	no derating	no derating
	16A	no derating	no derating
0-10VDC control[1]	30mA ballasts	no derating	no derating
Tu-Wire®	5A	4A	3.3A
Fan controls			
Quiet 3-speed	1.5A	no derating	no derating
Fully variable	6A	4.2A	2.5A
Fully variable	12A	10A	8.3A
Electronic tapswitches[2]			
VETS-1000-	1000W	800W	650W
VETS-1000-SL-	1000W	900W	700W
VETN-1000-	1000VA	700VA	550VA

For further information on ganging Nova®, visit **www.lutron.com/customganging**.

[1]PowerPack required for line voltage switching.
[2]VETS-R-Auxiliary electronic tapswitches do not require derating.

Dimmer capabilities and interface requirements

- Ⓜ Multi-location—true dimming from each location
- Ⓔ eco-model available
- Compatible dimmer (no interface)
- WBX TVI 3F PA Requires interface, see notes below

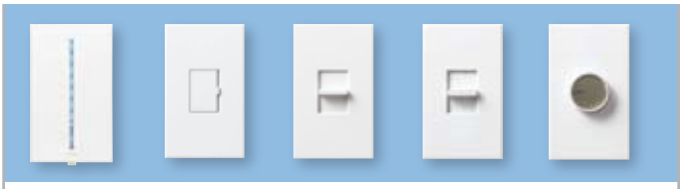

Dimmers	capacity†	Vierti®* pg. 14	Vareo® pg. 20	Nova T☆® pg. 26	Nova® pg. 34	Centurion® pg. 42
Incandescent/halogen 120V	600W			Ⓜ		
	1000W			Ⓜ		
	1500W		WBX			
	2000W		WBX			
Magnetic low-voltage 120V	600VA (450W)					
	1000VA (800W)					
	1500VA (1200W)		WBX			
	2000VA (1600W)		WBX	WBX		
Magnetic low-voltage 277V	600VA (450W)		WBX		WBX	
	1000VA (800W)		WBX		WBX	
Electronic low-voltage 120V	300W		WBX			
	450W		WBX	WBX		
	600W		WBX		WBX	
Electronic low-voltage 277V	16A		WBX	WBX	WBX	
Neon/cold cathode			WBX	WBX		
3-wire ballasts and Hi-lume® LED driver 120V	6A					
Hi-lume, Hi-lume Compact SE,	8A					
Eco-10® and EcoSystem® ballasts	16A		3F			
3-wire ballasts and Hi-lume LED driver 277V	6A		3F			
Hi-lume, Hi-lume Compact SE,	8A		3F			
Eco-10 and EcoSystem ballasts	16A		3F	3F	3F	
Tu-Wire® ballasts 120V	5A		PA			
0-10VDC (ballasts or LED Drivers) 120/277V	16A	TVI	TVI			

WBX: Wallbox Phase Adaptive Power Module (PHPM-WBX-DV-WH)

3F: Fluorescent Power Module (PHPM-3F-DV-WH)

TVI: 0-10V Interface (GRX-TVI)

PA: Phase Adaptive Power Module (PHPM-PA-DV-WH)

See pgs. 178–179 for specific compatible dimmer models and switching interface solutions.

*Consult Lutron Technical Support for information on interfaces with Vierti.

†UL listed for FULL wattage indicated (derate capacity only if ganged with other devices).

Dimmer capabilities and interface requirements

- Ⓜ Multi-location—true dimming from each location
- Ⓔ eco-model available
- Compatible dimmer (no interface)
- WBX TVI 3F PA Requires interface, see notes below

Dimmers	capacity†	Maestro® pg. 46	Maestro IR® pg. 60	Maestro Wireless® pg. 68	Spacer System® pg. 76	Diva® pg. 86
		Ⓜ	Ⓜ	Ⓜ	Ⓜ	
Incandescent/halogen 120V	600W	Ⓔ				Ⓔ
	1000W					
	1500W	WBX		WBX	WBX	WBX
	2000W	WBX		WBX	WBX	WBX
Magnetic low-voltage 120V	600VA (450W)					
	1000VA (800W)					
	1500VA (1200W)	WBX		WBX	WBX	WBX
	2000VA (1600W)	WBX		WBX	WBX	WBX
Magnetic low-voltage 277V	600VA (450W)	WBX		WBX	WBX	WBX
	1000VA (800W)	WBX		WBX	WBX	WBX
Electronic low-voltage 120V	300W			WBX		
	450W			WBX		WBX
	600W			WBX		WBX
Electronic low-voltage 277V	16A	WBX		WBX	WBX	WBX
Neon/cold cathode				WBX		WBX
3-wire ballasts and Hi-lume® LED driver 120V	6A					
Hi-lume, Hi-lume Compact SE,	8A	3F		3F	3F	
Eco-10® and EcoSystem® ballasts	16A	3F		3F	3F	3F
3-wire ballasts and Hi-lume LED driver 277V	6A					
Hi-lume, Hi-lume Compact SE,	8A	3F		3F	3F	3F
Eco-10 and EcoSystem ballasts	16A	3F		3F	3F	3F
Tu-Wire® ballasts 120V	5A	PA		PA		
0-10VDC (ballasts or LED Drivers) 120/277V	16A	TVI		TVI	TVI	TVI

WBX: Wallbox Phase Adaptive Power Module (PHPM-WBX-DV-WH)

3F: Fluorescent Power Module (PHPM-3F-DV-WH)

TVI: 0-10V Interface (GRX-TVI)

PA: Phase Adaptive Power Module (PHPM-PA-DV-WH)

See pgs. 178–179 for specific compatible dimmer models and switching interface solutions.

†UL listed for FULL wattage indicated (derate capacity only if ganged with other devices).

Dimmer capabilities and interface requirements

Ⓜ Multi-location—true dimming from each location
Ⓔ eco-model available
Compatible dimmer (no interface)
WBX TVI 3F PA Requires interface, see notes below

Dimmers	capacity†	Lyneo® Lx pg. 94	Skylark Contour™ pg. 100	Skylark® pg. 104	Abella® pg. 114
					Ⓜ
Incandescent/halogen 120V	600W		Ⓔ	Ⓔ	
	1000W				
	1500W	WBX		WBX	
	2000W	WBX		WBX	
Magnetic low-voltage 120V	600VA (450W)				
	1000VA (800W)			WBX	
	1500VA (1200W)	WBX		WBX	
	2000VA (1600W)	WBX		WBX	
Magnetic low-voltage 277V	600VA (450W)	WBX		WBX	
	1000VA (800W)	WBX		WBX	
Electronic low-voltage 120V	300W				
	450W			WBX	
	600W			WBX	
Electronic low-voltage 277V	16A	WBX		WBX	
Neon/cold cathode		WBX		WBX	
3-wire ballasts and Hi-lume® LED driver 120V	6A				
Hi-lume, Hi-lume Compact SE,	8A				
Eco-10® and EcoSystem® ballasts	16A	3F		3F	
3-wire ballasts and Hi-lume LED driver 277V	6A				
Hi-lume, Hi-lume Compact SE,	8A	3F		3F	
Eco-10 and EcoSystem ballasts	16A	3F		3F	
Tu-Wire® ballasts 120V	5A	PA			
0-10VDC (ballasts or LED Drivers) 120/277V	16A	TVI		TVI	

WBX: Wallbox Phase Adaptive Power Module (PHPM-WBX-DV-WH)
3F: Fluorescent Power Module (PHPM-3F-DV-WH)
TVI: 0-10V Interface (GRX-TVI)
PA: Phase Adaptive Power Module (PHPM-PA-DV-WH)

See pgs. 178–179 for specific compatible dimmer models and switching interface solutions.

†UL listed for FULL wattage indicated (derate capacity only if ganged with other devices).

Dimmer capabilities and interface requirements

- Ⓜ Multi-location—true dimming from each location
- Ⓔ eco-model available
- Compatible dimmer (no interface)
- WBX TVI 3F PA Requires interface, see notes below

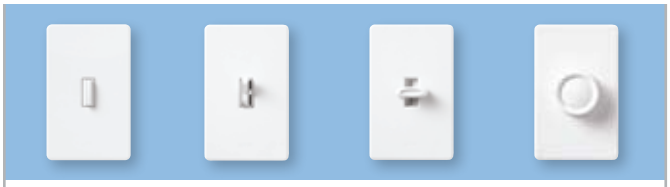

Ceana® pg. 120	Ariadni® pg. 124	Glyder® pg. 130	Rotary pg. 134

Dimmers	capacity†				
Incandescent/halogen 120V	600W		Ⓔ		Ⓔ
	1000W				
	1500W		WBX		
	2000W		WBX		
Magnetic low-voltage 120V	600VA (450W)				
	1000VA (800W)				
	1500VA (1200W)		WBX		
	2000VA (1600W)		WBX		
Magnetic low-voltage 277V	600VA (450W)		WBX		
	1000VA (800W)		WBX		
Electronic low-voltage 120V	300W		WBX		
	450W		WBX		
	600W		WBX		
Electronic low-voltage 277V	16A		WBX		
Neon/cold cathode			WBX		
3-wire ballasts and Hi-lume® LED driver 120V	6A				
Hi-lume, Hi-lume Compact SE,	8A				
Eco-10® and EcoSystem® ballasts	16A		3F		
3-wire ballasts and Hi-lume LED driver 277V	6A				
Hi-lume, Hi-lume Compact SE,	8A		3F		
Eco-10 and EcoSystem ballasts	16A		3F		
Tu-Wire® ballasts 120V	5A		PA		
0-10VDC (ballasts or LED Drivers) 120/277V	16A		TVI		

WBX: Wallbox Phase Adaptive Power Module (PHPM-WBX-DV-WH)
3F: Fluorescent Power Module (PHPM-3F-DV-WH)
TVI: 0-10V Interface (GRX-TVI)
PA: Phase Adaptive Power Module (PHPM-PA-DV-WH)

See pgs. 178–179 for specific compatible dimmer models and switching interface solutions.

†UL listed for FULL wattage indicated (derate capacity only if ganged with other devices).

Dimmer models/load interface compatibility

	Incandescent, magnetic and electronic low-voltage (120/277 V)		**3-wire Fluorescent ballasts or Hi-lume® LED drivers** (120/277 V)		**0-10 VDC Ballasts or LED drivers** (120/277 V)	
	WBX		**3F**		**TVI**	
	Wallbox Phase Adaptive Power Module* PHPM-WBX-DV-WH		Fluorescent Power Module* PHPM-3F-DV-WH		0-10 V Interface GRX-TVI	
Dimmer Family	Single-pole	3-way or multi-location	Single-pole	3-way or multi-location	Single-pole	3-way or multi-location
Abella®	–	–	–	–	–	–
Ariadni®	–	AYF-103P-	–	AYF-103P-	–	AYF-103P-
Ceana®	–	–	–	–	–	–
Diva® Gloss	–	DVF-103P-	–	DVF-103P-	–	DVF-103P-
Diva Satin Colors®	–	DVSCF-103P-	–	DVSCF-103P-	–	DVSCF-103P-
Glyder®	–	–	–	–	–	–
Lyneo® Lx	–	LXF-103PL-	–	LXF-103PL-	–	LXF-103PL-
Maestro® Gloss	–	MAF-6AM-	–	MAF-6AM-	–	MAF-6AM-
Maestro® Satin Colors®	–	MSCF-6AM-	–	MSCF-6AM-	–	MSCF-6AM-
Maestro Wireless®	–	MRF2-F6AN-DV-	–	MRF2-F6AN-DV-	–	MRF2-F6AN-DV-
Nova®	NF-10-	NF-103P-	NF-10-	NF-103P-	NF-10-	NF-103P-
Nova T☆®	NTF-10-	NTF-103P-	NTF-10-	NTF-103P-	NTF-10-	NTF-103P-
Skylark®	SF-10P-	SF-103P-	SF-10P-	SF-103P-	SF-10P-	SF-103P-
Spacer System®	–	SPSF-6AM-	–	SPSF-6AM-	SPSF-S6A-	SPSF-6AM-
Vareo®	–	VF-10-	–	VF-10-	–	VF-10-
Vierti®	contact Lutron		contact Lutron		–	VTF-6AM-

Use only dimmer model numbers listed.

*Dual 120/277 V model given, 120 V only versions are also available.
Please see Technical notes, pg. 179.

Dimmer models/load interface compatibility

	Tu-Wire® Fluorescent Ballasts (120V)		**Switched Lighting** (120/277V)	
	PA		**SW**	
	Phase Adaptive Power Module* PHPM-PA-DV-WH		Switching Power Module* PHPM-SW-DV-WH	
Dimmer Family	Single-pole	3-way or multi-location	Single-pole	3-way or multi-location
Abella®	–	–	–	AB-S6AM-
Ariadni®	–	AYF-103P-	–	–
Ceana®	–	–	–	–
Diva® Gloss	–	DVF-103P-	–	–
Diva Satin Colors®	–	DVSCF-103P-	–	–
Glyder®	–	–	–	–
Lyneo® Lx	–	LXF-103PL-	LX-1PSL-	LX-3PSL-
Maestro® Gloss	–	MAF-6AM-	–	MA-S8AM-
Maestro® Satin Colors®	–	MSCF-6AM-	–	MSC-S8AM-
Maestro Wireless®	–	MRF2-F6AN-DV-	–	MRF2-6ANS-
Nova®	NF-10-	NF-103P-	–	–
Nova T☆®	NTF-10-	NTF-103P-	–	–
Skylark®	SF-10P-	SF-103P-	–	–
Spacer System®	SPSF-S6A-	SPSF-6AM-	SPSF-S6A-	SPSF-S6AM-
Vareo®	–	VF-10-	–	VETN-1000-
Vierti®	contact Lutron		contact Lutron	

Use only dimmer model numbers listed.

*Dual 120/277V model given, 120V only versions are also available. Please see Technical notes, pg. 179.

Technical notes

- Lighting load interfaces must be matched to load type and voltage
- All load interfaces for dimmed load are controlled by a 120V 3-wire fluorescent dimmer
- Power feed to dimmer may differ from lighting load/interface voltage
- Interfaces typically require additional power feeds
- For wiring information, consult wiring diagrams, see pgs. 193-195
- For assistance and additional solutions, consult Lutron Technical Support at 1.800.523.9466 (24 hours/7 days)

Interface mounting

- PHPM interfaces mount to 2-gang electrical backbox (W: 6.30in x H: 5.10in)
- GRX-TVI enclosure is surface mount only (W: 6.10in x H: 12.50in x D: 3.30in)

Skylark Contour™

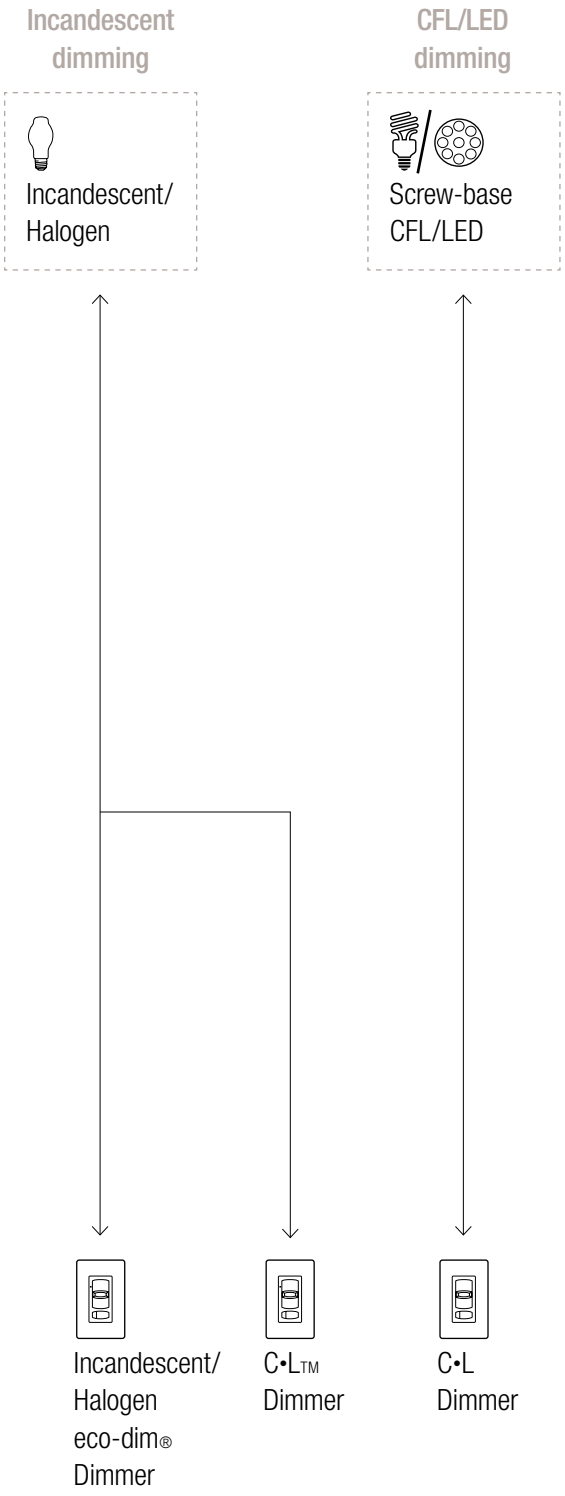

For illustration purposes only. Consult model number pages for specific voltage and capacity information.