




**PASS & SEYMOUR®**

## Specification Grade Self-Test GFCIs 15 & 20A, 125VAC

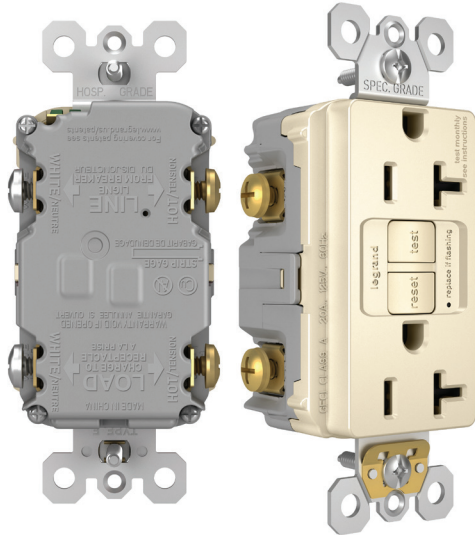

### Reinventing Safety All Around

1597, 2097, 1597NTLTR, 2097NTLTR, 1597TR, 2097TR, 1597TRWR, 2097TRWR, 1597TRA, 2097TRA, 1597IGTR, 2097IGTR, 1597SWTTR, 2097NA, 1597TRNA, 2097TRNA, 1597TRWRNA, 2097TRWRNA, 1597TRSG, 2097TRSG, 1597TRAPL, 2097TRAPL, 1597TRSG LAPL, 2097TRSG LAPL, 1597TRAAPL, 2097TRAAPL

The Pass & Seymour® Self-Test GFCI receptacle with SafeLock® Protection conducts an automatic test every three seconds, ensuring it's always ready to protect. If the device fails the test, the indicator light flashes to signal that the GFCI should be replaced. It also has our proven SafeLock Protection feature: if critical components are damaged and protection is lost, power to the receptacle is disconnected.

For Hospital Grade, refer to SF708R4.

### Features & Benefits


**Patented SafeLock® Protection:** if critical components are damaged and ground fault protection is lost, power to the receptacle is disconnected.

**Tamper-resistant automatic shutter system** prevents young children from inserting common household objects. Now contains "invisi-shutters" for an invisible effect.

**The indicator light flashes** if the device fails the self-test, signalling that the GFCI should be replaced.

**Side or internal screw-pressure-plate back wire termination** with #14 - #10 AWG stranded or solid, copper or copper-clad conductors.

**Captive screws** make for easier installation.

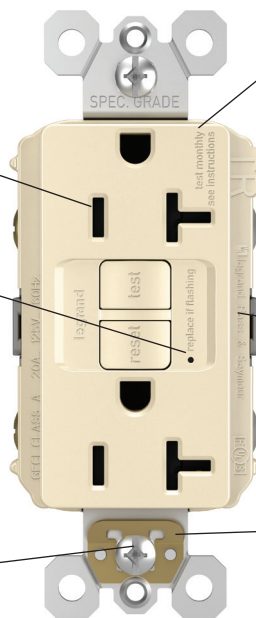

**Ground terminal clamp** allows for fast installation.

**Two back-wire holes per termination** add wiring flexibility, eliminate pigtail and save box space.

**Prevents line-load reversal miswire:** No power to the face or downstream receptacles if wired incorrectly.

**High-impact-resistant, thermoplastic construction** for superior strength and durability.

**Thinner profile** speeds installation by leaving more room for wires in the box.

**Auto-ground clip** assures a positive ground to metal box.

**The most durable GFCI available.** Exceeds UL943 voltage surge requirements.

Meets 2015 UL Requirements

2097TRLA

### Field Uses/Vertical Markets

- Industrial
- Healthcare
- Education
- Institutional
- Retail
- Office
- Hospitality/Lodging
- Multiple Dwelling


## Ordering Information

### Specification Grade Self-Test GFCI Receptacles

| Catalog Number  | Description                                                           | Rating   | Color                                | NEMA Config |
|-----------------|-----------------------------------------------------------------------|----------|--------------------------------------|-------------|
| 1597TR*         | Spec-Grade Tamper-Resistant 15 Amp GFCI                               | 15A 125V | I, W, -, GRY, BK, LA, NI, DB, G      | 5-15R       |
| 1597*           | Spec-Grade 15 Amp GFCI                                                | 15A 125V | I, W, -, GRY, BK, RED, LA            | 5-15R       |
| 1597TRA*        | Spec grade Audible Alarm Tamper-Resistant GFCI 15 Amp                 | 15A 125V | I, W, -, LA                          | 5-15R       |
| 1597SWTTRR*CCD4 | Combination Tamper-Resistant Switch/GFCI (No Federal Specification)   | 15A 125V | I, W, BK, LA, GRY                    | 5-15R       |
| 1597NTLTR*CC4   | Combination Tamper-Resistant 15 Amp Night Light/GFCI                  | 15A 125V | I, W, BK, LA, NI, DB                 | 5-15R       |
| 1597TRWR*       | Spec-Grade Weather-Resistant 15 Amp GFCI                              | 15A 125V | I, W, -, GRY, BK, LA                 | 5-15R       |
| 2097TR*         | Spec-Grade Tamper-Resistant 20 Amp GFCI                               | 20A 125V | I, W, -, GRY, BK, RED, LA, NI, DB, G | 5-20R       |
| 2097*           | Spec-Grade 20 Amp GFCI                                                | 20A 125V | I, W, -, GRY, BK, RED, LA            | 5-20R       |
| 1597IGTR*       | Spec-Grade Isolated Ground Tamper-Resistant GFCI                      | 15A 125V | I, W, O                              | 5-15R       |
| 2097IGTR*       | Spec-Grade Isolated Ground Tamper-Resistant GFCI                      | 20A 125V | I, W, GRY, O, LA                     | 5-20R       |
| 2097NTLTR*      | Combination Tamper-Resistant 20 Amp Night Light/GFCI                  | 20A 125V | I, W, GRY, BK, LA                    | 5-20R       |
| 2097TRWR*       | Spec-Grade Weather-Resistant 20 Amp GFCI                              | 20A 125V | I, W, -, GRY, BK, LA                 | 5-20R       |
| 2097TRA*        | Spec-Grade Audible Alarm Tamper-Resistant 20 Amp GFCI                 | 20A 125V | I, W, -, LA                          | 5-20R       |
| 1597TRNA*       | NAFTA-Compliant Spec-Grade Tamper-Resistant GFCI                      | 15A 125V | I, W, GRY, LA                        | 5-15R       |
| 2097TRNA*       | NAFTA-Compliant Spec-Grade Tamper-Resistant GFCI                      | 20A 125V | I, W, GRY, LA                        | 5-20R       |
| 2097NA*         | NAFTA-Compliant Spec-Grade 20 Amp GFCI                                | 20A 125V | I, W, GRY, LA, BL                    | 5-20R       |
| 1597TRWRNA*     | NAFTA-Compliant Tamper-Resistant Weather-Resistant GFCI               | 15A 125V | I, W, -, LA                          | 5-15R       |
| 2097TRWRNA*     | NAFTA-Compliant Tamper-Resistant Weather-Resistant GFCI               | 20A 125V | I, W, GRY, LA                        | 5-20R       |
| 1597TRSGL       | 15A Tamper-Resistant Self-Test Simplex GFCI                           | 15A 125V | I, W, GRY, LA, RED, -, BK            | 5-15R       |
| 2097TRSGL       | 20A Tamper-Resistant Self-Test Simplex GFCI                           | 20A 125V | I, W, GRY, LA, RED, -, BK            | 5-20R       |
| 1597TRAPL       | 15A Tamper-Resistant Self-Test Sensitive Appliance GFCI               | 15A 125V | W                                    | 5-15R       |
| 2097TRAPL       | 20A Tamper-Resistant Self-Test Sensitive Appliance GFCI               | 20A 125V | W                                    | 5-20R       |
| 1597TRSGLAPL    | 15A Tamper-Resistant Self-Test Sensitive Appliance Simplex GFCI       | 15A 125V | W                                    | 5-15R       |
| 2097TRSGLAPL    | 20A Tamper-Resistant Self-Test Sensitive Appliance Simplex GFCI       | 20A 125V | W                                    | 5-20R       |
| 1597TRAAPL      | 15A Audible Alarm Tamper-Resistant Self-Test Sensitive Appliance GFCI | 15A 125V | W                                    | 5-15R       |
| 2097TRAAPL      | 20A Audible Alarm Tamper-Resistant Self-Test Sensitive Appliance GFCI | 20A 125V | W                                    | 5-20R       |

#### \*Color Designation

|    |                      |     |                    |     |               |    |                     |
|----|----------------------|-----|--------------------|-----|---------------|----|---------------------|
| I  | <b>Ivory</b>         | -   | <b>Brown</b>       | BK  | <b>Black</b>  | LA | <b>Light Almond</b> |
| W  | <b>White</b>         | GRY | <b>Gray</b>        | RED | <b>Red</b>    | NI | <b>Nickel</b>       |
| AB | <b>Antique Brass</b> | DB  | <b>Dark Bronze</b> | O   | <b>Orange</b> | BL | <b>Blue</b>         |



For more information on these and other P&S products refer to our Catalog or visit our website.

For latest specs visit [www.legrand.us/passandseymour](http://www.legrand.us/passandseymour)

## Technical Information

### 3rd Party Compliance

cULus Listed File Number E42190, Standard UL498 Attachment Plugs and Receptacles, Standard UL943 for GFCIs, Federal Specification WC596, Hospital Grade. Standard CSA C22.2 No. 42 General Use Receptacles, CSA C22.2 No. 144 for GFCIs. Conforms to NEMA WD-1 and WD-6.

**Note: Depth of 1.03" for Simplex, Audible Alarm and Appliance versions.**

### Performance

#### Electrical

|                         |                          |
|-------------------------|--------------------------|
| Dielectric Voltage      | Withstands 1500V minimum |
| Trip Level              | 4 to 6 mA                |
| Trip Time               | .025 Second Nominal      |
| Frequency               | 60 Hz                    |
| Maximum Working Voltage | 125VAC                   |
| Voltage Range           | 102-132VAC               |

#### Mechanical

|                         |                                                                                  |
|-------------------------|----------------------------------------------------------------------------------|
| Terminal Identification | Terminals identified in accordance with UL498 (Hot, White, Green)                |
| Terminal Accommodation  | Accepts #14-#10AWG solid & stranded wires, Copper-clad aluminum, and copper wire |
| Product Identification  | Ratings are a permanent part of device                                           |

#### Environmental

|                       |                |
|-----------------------|----------------|
| Operating Temperature | -35°C to +66°C |
| Maximum Humidity      | 95%            |
| Flammability          | UL94 V2        |


### Material Specs

Face: Nylon  
Body: Nylon  
Contacts: .03" Brass (.8)  
Mounting Straps: Galvanized Steel  
Terminal Screws: Nickel-Plated Steel #8 - 32  
Hex Head Grounding Screw: Steel (Green)  
Flat Head Mounting Screws: Zinc-Plated Steel  
Test/Reset Buttons: Nylon  
Auto-Ground Clip: Brass Alloy  
\*Night Light Lens: Lexan®  
\*\*Tamper-Resistant Shutter: Thermoplastic

\* For 1597NTLTR and 2097NTLTR Night Light versions only.  
\*\* For 1597TR and 2097TR Tamper-Resistant versions only.

### Warranty

1 year

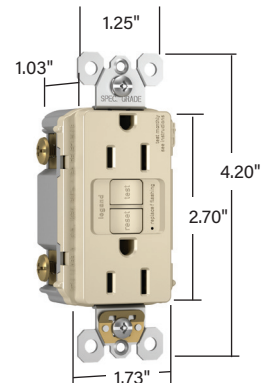

**Dimensions for  
15 & 20 Amp**



**Audible Alarm**



**Nightlight/GFCI**



**Simplex**



**Weather-Resistant**



**Tamper-Resistant**

---

## Also available

- USB Charging Devices
- PlugTail® Devices
- Surge Protective & Isolated Ground Devices
- Ground Continuity Monitoring Devices (GCM)
- Straight Blade Plugs & Connectors
- Turnlok® Locking Devices
- Weatherproof Boxes & Covers
- IEC 309 Industrial Products
- Flexcor® Wire Mesh Grips
- Night Lights



The paper used to print this document is an environmentally responsible paper with 10% post consumer waste, with FSC and SFI Chain of Custody certifications, Lacey Act compliant. 100% of the electricity used to manufacture Flo sheets is generated with Green-e certified renewable energy.

All brand and product names referenced in this document are registered trademarks or trademarks of their respective holders.




**Legrand, North America**  
60 Woodlawn Street  
West Hartford, CT 06110  
1.877.BY.LEGRAND (295.3472)  
[www.legrand.us](http://www.legrand.us)  
905.738.9195  
[www.legrand.ca](http://www.legrand.ca)



**PASS & SEYMOUR®**

## Specification Grade Self-Test GFCIs 15 & 20A, 125VAC

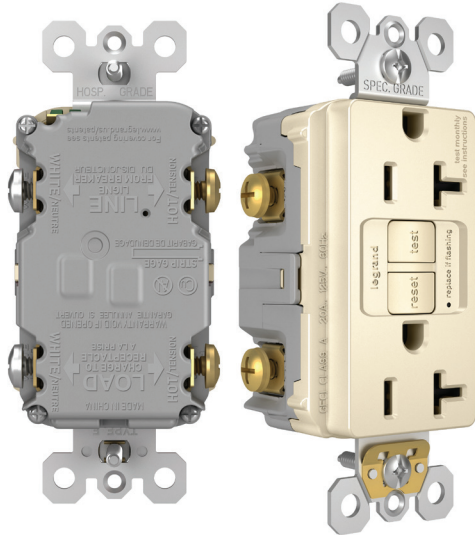

### Reinventing Safety All Around

1597, 2097, 1597NTLTR, 2097NTLTR, 1597TR, 2097TR, 1597TRWR, 2097TRWR, 1597TRA, 2097TRA, 1597IGTR, 2097IGTR, 1597SWTTR, 2097NA, 1597TRNA, 2097TRNA, 1597TRWRNA, 2097TRWRNA, 1597TRSG, 2097TRSG, 1597TRAPL, 2097TRAPL, 1597TRSG LAPL, 2097TRSG LAPL, 1597TRAAPL, 2097TRAAPL

The Pass & Seymour® Self-Test GFCI receptacle with SafeLock® Protection conducts an automatic test every three seconds, ensuring it's always ready to protect. If the device fails the test, the indicator light flashes to signal that the GFCI should be replaced. It also has our proven SafeLock Protection feature: if critical components are damaged and protection is lost, power to the receptacle is disconnected.

For Hospital Grade, refer to SF708R4.

### Features & Benefits

**Patented SafeLock® Protection:**


if critical components are damaged and ground fault protection is lost, power to the receptacle is disconnected.

**Tamper-resistant automatic shutter system** prevents young children from inserting common household objects. Now contains "invisi-shutters" for an invisible effect.

**The indicator light flashes** if the device fails the self-test, signalling that the GFCI should be replaced.

**Side or internal screw-pressure-plate back wire termination** with #14 - #10 AWG stranded or solid, copper or copper-clad conductors.

**Captive screws** make for easier installation.

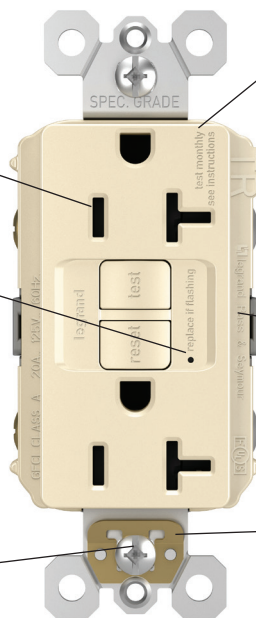

**Ground terminal clamp** allows for fast installation.

**Two back-wire holes per termination** add wiring flexibility, eliminate pigtail and save box space.

**Prevents line-load reversal miswire:** No power to the face or downstream receptacles if wired incorrectly.

**High-impact-resistant, thermoplastic construction** for superior strength and durability.

**Thinner profile** speeds installation by leaving more room for wires in the box.

**Auto-ground clip** assures a positive ground to metal box.

**The most durable GFCI available.** Exceeds UL943 voltage surge requirements.

Meets 2015 UL Requirements

2097TRLA

### Field Uses/Vertical Markets

- Industrial
- Healthcare
- Education
- Institutional
- Retail
- Office
- Hospitality/Lodging
- Multiple Dwelling


## Ordering Information

### Specification Grade Self-Test GFCI Receptacles

| Catalog Number  | Description                                                           | Rating   | Color                                | NEMA Config |
|-----------------|-----------------------------------------------------------------------|----------|--------------------------------------|-------------|
| 1597TR*         | Spec-Grade Tamper-Resistant 15 Amp GFCI                               | 15A 125V | I, W, -, GRY, BK, LA, NI, DB, G      | 5-15R       |
| 1597*           | Spec-Grade 15 Amp GFCI                                                | 15A 125V | I, W, -, GRY, BK, RED, LA            | 5-15R       |
| 1597TRA*        | Spec grade Audible Alarm Tamper-Resistant GFCI 15 Amp                 | 15A 125V | I, W, -, LA                          | 5-15R       |
| 1597SWTTRR*CCD4 | Combination Tamper-Resistant Switch/GFCI (No Federal Specification)   | 15A 125V | I, W, BK, LA, GRY                    | 5-15R       |
| 1597NTLTR*CC4   | Combination Tamper-Resistant 15 Amp Night Light/GFCI                  | 15A 125V | I, W, BK, LA, NI, DB                 | 5-15R       |
| 1597TRWR*       | Spec-Grade Weather-Resistant 15 Amp GFCI                              | 15A 125V | I, W, -, GRY, BK, LA                 | 5-15R       |
| 2097TR*         | Spec-Grade Tamper-Resistant 20 Amp GFCI                               | 20A 125V | I, W, -, GRY, BK, RED, LA, NI, DB, G | 5-20R       |
| 2097*           | Spec-Grade 20 Amp GFCI                                                | 20A 125V | I, W, -, GRY, BK, RED, LA            | 5-20R       |
| 1597IGTR*       | Spec-Grade Isolated Ground Tamper-Resistant GFCI                      | 15A 125V | I, W, O                              | 5-15R       |
| 2097IGTR*       | Spec-Grade Isolated Ground Tamper-Resistant GFCI                      | 20A 125V | I, W, GRY, O, LA                     | 5-20R       |
| 2097NTLTR*      | Combination Tamper-Resistant 20 Amp Night Light/GFCI                  | 20A 125V | I, W, GRY, BK, LA                    | 5-20R       |
| 2097TRWR*       | Spec-Grade Weather-Resistant 20 Amp GFCI                              | 20A 125V | I, W, -, GRY, BK, LA                 | 5-20R       |
| 2097TRA*        | Spec-Grade Audible Alarm Tamper-Resistant 20 Amp GFCI                 | 20A 125V | I, W, -, LA                          | 5-20R       |
| 1597TRNA*       | NAFTA-Compliant Spec-Grade Tamper-Resistant GFCI                      | 15A 125V | I, W, GRY, LA                        | 5-15R       |
| 2097TRNA*       | NAFTA-Compliant Spec-Grade Tamper-Resistant GFCI                      | 20A 125V | I, W, GRY, LA                        | 5-20R       |
| 2097NA*         | NAFTA-Compliant Spec-Grade 20 Amp GFCI                                | 20A 125V | I, W, GRY, LA, BL                    | 5-20R       |
| 1597TRWRNA*     | NAFTA-Compliant Tamper-Resistant Weather-Resistant GFCI               | 15A 125V | I, W, -, LA                          | 5-15R       |
| 2097TRWRNA*     | NAFTA-Compliant Tamper-Resistant Weather-Resistant GFCI               | 20A 125V | I, W, GRY, LA                        | 5-20R       |
| 1597TRSGL       | 15A Tamper-Resistant Self-Test Simplex GFCI                           | 15A 125V | I, W, GRY, LA, RED, -, BK            | 5-15R       |
| 2097TRSGL       | 20A Tamper-Resistant Self-Test Simplex GFCI                           | 20A 125V | I, W, GRY, LA, RED, -, BK            | 5-20R       |
| 1597TRAPL       | 15A Tamper-Resistant Self-Test Sensitive Appliance GFCI               | 15A 125V | W                                    | 5-15R       |
| 2097TRAPL       | 20A Tamper-Resistant Self-Test Sensitive Appliance GFCI               | 20A 125V | W                                    | 5-20R       |
| 1597TRSGLAPL    | 15A Tamper-Resistant Self-Test Sensitive Appliance Simplex GFCI       | 15A 125V | W                                    | 5-15R       |
| 2097TRSGLAPL    | 20A Tamper-Resistant Self-Test Sensitive Appliance Simplex GFCI       | 20A 125V | W                                    | 5-20R       |
| 1597TRAAPL      | 15A Audible Alarm Tamper-Resistant Self-Test Sensitive Appliance GFCI | 15A 125V | W                                    | 5-15R       |
| 2097TRAAPL      | 20A Audible Alarm Tamper-Resistant Self-Test Sensitive Appliance GFCI | 20A 125V | W                                    | 5-20R       |

#### \*Color Designation

|    |                      |     |                    |     |               |    |                     |
|----|----------------------|-----|--------------------|-----|---------------|----|---------------------|
| I  | <b>Ivory</b>         | -   | <b>Brown</b>       | BK  | <b>Black</b>  | LA | <b>Light Almond</b> |
| W  | <b>White</b>         | GRY | <b>Gray</b>        | RED | <b>Red</b>    | NI | <b>Nickel</b>       |
| AB | <b>Antique Brass</b> | DB  | <b>Dark Bronze</b> | O   | <b>Orange</b> | BL | <b>Blue</b>         |



For more information on these and other P&S products refer to our Catalog or visit our website.

For latest specs visit [www.legrand.us/passandseymour](http://www.legrand.us/passandseymour)

## Technical Information

### 3rd Party Compliance

cULus Listed File Number E42190, Standard UL498 Attachment Plugs and Receptacles, Standard UL943 for GFCIs, Federal Specification WC596, Hospital Grade. Standard CSA C22.2 No. 42 General Use Receptacles, CSA C22.2 No. 144 for GFCIs. Conforms to NEMA WD-1 and WD-6.

**Note: Depth of 1.03" for Simplex, Audible Alarm and Appliance versions.**

### Performance

#### Electrical

|                         |                          |
|-------------------------|--------------------------|
| Dielectric Voltage      | Withstands 1500V minimum |
| Trip Level              | 4 to 6 mA                |
| Trip Time               | .025 Second Nominal      |
| Frequency               | 60 Hz                    |
| Maximum Working Voltage | 125VAC                   |
| Voltage Range           | 102-132VAC               |

#### Mechanical

|                         |                                                                                  |
|-------------------------|----------------------------------------------------------------------------------|
| Terminal Identification | Terminals identified in accordance with UL498 (Hot, White, Green)                |
| Terminal Accommodation  | Accepts #14-#10AWG solid & stranded wires, Copper-clad aluminum, and copper wire |
| Product Identification  | Ratings are a permanent part of device                                           |

#### Environmental

|                       |                |
|-----------------------|----------------|
| Operating Temperature | -35°C to +66°C |
| Maximum Humidity      | 95%            |
| Flammability          | UL94 V2        |


### Material Specs

Face: Nylon  
Body: Nylon  
Contacts: .03" Brass (.8)  
Mounting Straps: Galvanized Steel  
Terminal Screws: Nickel-Plated Steel #8 - 32  
Hex Head Grounding Screw: Steel (Green)  
Flat Head Mounting Screws: Zinc-Plated Steel  
Test/Reset Buttons: Nylon  
Auto-Ground Clip: Brass Alloy  
\*Night Light Lens: Lexan®  
\*\*Tamper-Resistant Shutter: Thermoplastic

\* For 1597NTLTR and 2097NTLTR Night Light versions only.  
\*\* For 1597TR and 2097TR Tamper-Resistant versions only.

### Warranty

1 year

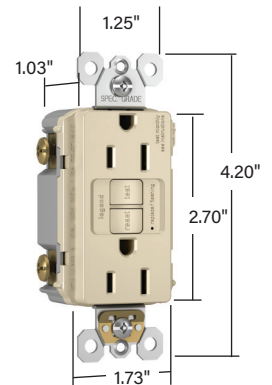

**Dimensions for  
15 & 20 Amp**



**Audible Alarm**



**Nightlight/GFCI**



**Simplex**



**Weather-Resistant**



**Tamper-Resistant**

---

## Also available

- USB Charging Devices
- PlugTail® Devices
- Surge Protective & Isolated Ground Devices
- Ground Continuity Monitoring Devices (GCM)
- Straight Blade Plugs & Connectors
- Turnlok® Locking Devices
- Weatherproof Boxes & Covers
- IEC 309 Industrial Products
- Flexcor® Wire Mesh Grips
- Night Lights



The paper used to print this document is an environmentally responsible paper with 10% post consumer waste, with FSC and SFI Chain of Custody certifications, Lacey Act compliant. 100% of the electricity used to manufacture Flo sheets is generated with Green-e certified renewable energy.

All brand and product names referenced in this document are registered trademarks or trademarks of their respective holders.



**Legrand, North America**  
60 Woodlawn Street  
West Hartford, CT 06110  
1.877.BY.LEGRAND (295.3472)  
[www.legrand.us](http://www.legrand.us)  
905.738.9195  
[www.legrand.ca](http://www.legrand.ca)