


## One-Piece, Nonmetallic, Latching Raceway For Low Voltage Applications

Uniduct® Series 2700, 2800, 2900 Latching Raceway Systems are one-piece, single channel, nonmetallic raceways ideally suited for routing and protecting fiber optic, UTP, and other low-voltage (50V or less) cabling in an easy to install, aesthetically pleasing application.

Uniduct Series 2800 and 2900 Raceway radiused fittings (FO) maintain 1 1/4" (32mm) bend radius control and are the perfect solution for even the most demanding cabling applications.




The Uniduct Raceway design features a co-extruded flexible PVC hinge that prevents cracking and splitting even after numerous openings and closings.




### FEATURES & BENEFITS

- **One-piece design with adhesive backing.** Easy to handle. Makes installation quick and easy.
- **Available in three low profile sizes, in both 6' & 8' (1.8m & 2.4m) lengths.** Allows flexibility for cabling requirements. Six- and eight-foot (1.8m and 2.4m) lengths minimize cutting, cover clips, and scraps.
- **Three standard colors.** Stock colors are ivory, white, and fog white (matches with Ortronics® White). Consult factory for custom colors. Paintable using latex paint.
- **Durable, flexible hinge construction.** Allows for repeated openings and closings while maintaining product integrity and aesthetics. Easy open and snap-close latch facilitates installations, moves, and changes.
- **Durable, impact-resistant PVC construction.** Easy to cut and trim.
- **Full range of fittings.** Surface mount boxes and multipoint workstation outlets makes installations quick and easy.
- **Bend radius compliant fittings for 2800 and 2900 Series Raceways.** Maintain 1 1/4" (32mm) bend radius control required for UTP and fiber optic cable.
- **Datacom connectivity options.** Accepts industry standard and proprietary devices from a wide range of manufacturers to provide a seamless and aesthetically pleasing interface for voice, data, audio, and video applications at the point of use.



Uniduct® 2700 Series Raceway




Uniduct® 2800 Series Raceway



Uniduct® 2900 Series Raceway

## Uniduct Latching Raceway System Layout

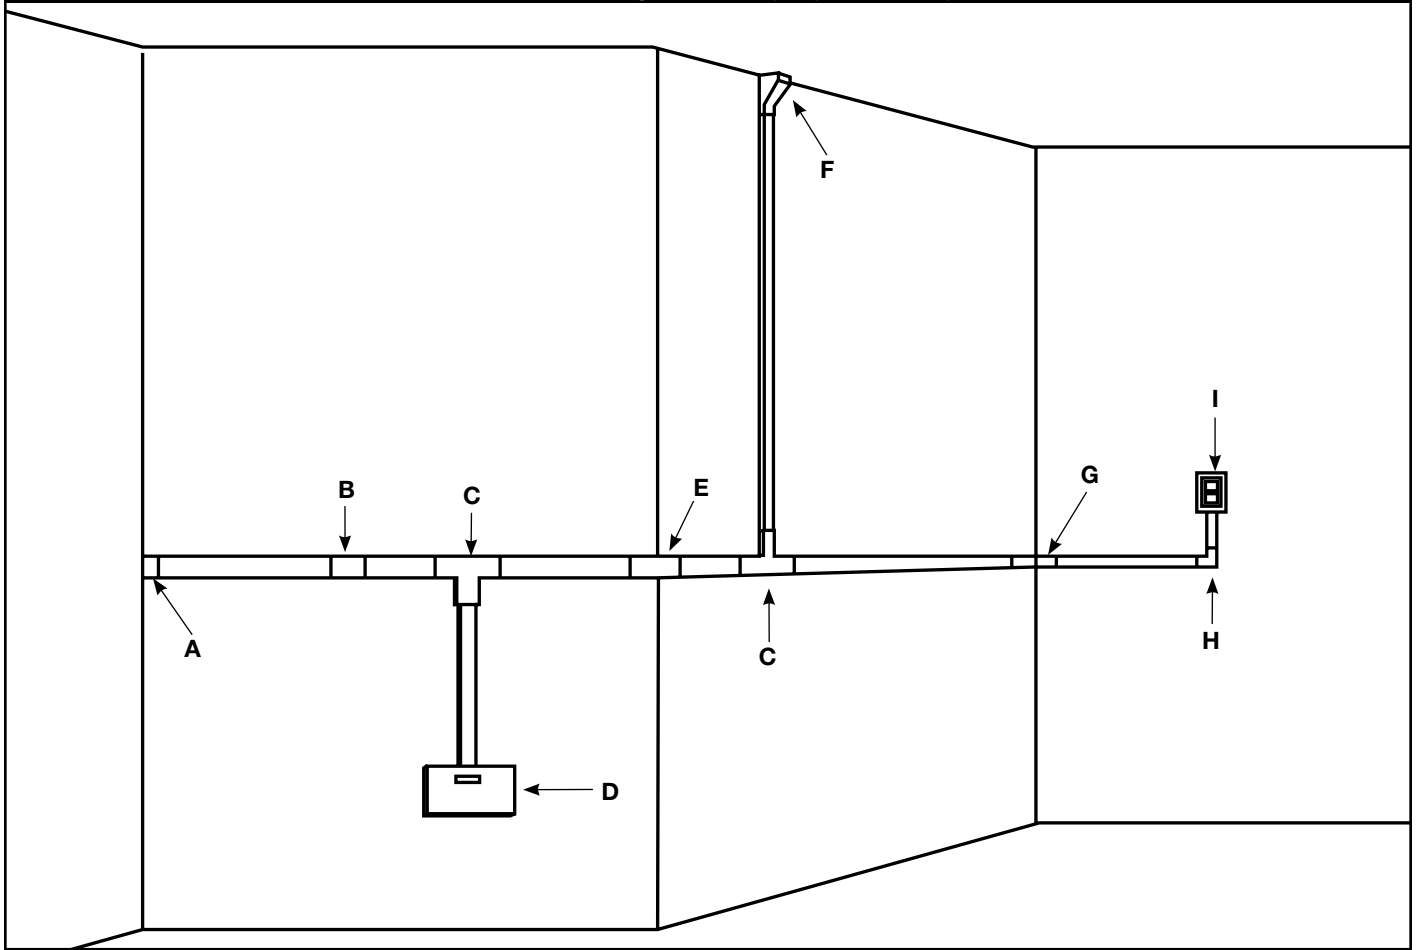

**NOTE:** Illustration is for showing product applications only.

|                              |                                          |                                   |                                       |
|------------------------------|------------------------------------------|-----------------------------------|---------------------------------------|
| <b>A — Blank End Fitting</b> | 2710B, 2810B, 2910B                      | <b>F — Drop Ceiling Connector</b> | 2786, 2886, 2986                      |
| <b>B — Cover Clip</b>        | 2706, 2806, 2906                         | <b>G — Internal Elbow</b>         | 2717, 2817, 2917                      |
| <b>C — Tee Fitting</b>       | 2715, 2815, 2915                         | <b>H — Flat Elbow</b>             | 2711, 2811, 2911                      |
| <b>D — Multimedia Box</b>    | CM-MMB-291,<br>CM-MMB-292,<br>CM-MMB-293 | <b>I — Device Box</b>             | NM2044, NM2044-2,<br>NM2048, NM2048-2 |
| <b>E — External Elbow</b>    | 2718, 2818, 2918                         |                                   |                                       |



**PEP  
eco  
PASS  
PORT®**

Download this product's PEP ecopassport® environmental product declaration at [www.legrand.us/resources-and-downloads](http://www.legrand.us/resources-and-downloads). This declaration conforms with ISO 14025 and 14040 and is in alignment with EN 15804.

## Wire Fill Capacity Charts

### Uniduct 2700 Series Raceway Wire Fill Capacity Chart

|                            | CABLE/WIRE SIZE         | O.D. (Approx. Dia.)<br>Inches (mm) | 40% FILL |
|----------------------------|-------------------------|------------------------------------|----------|
| UNSHIELDED<br>TWISTED PAIR | 4-pair, 24 AWG Cat. 3   | 0.190 (4.8)                        | 2        |
|                            | 4-pair, 24 AWG Cat. 5e  | 0.210 (5.3)                        | 1        |
|                            | 4-pair, 24 AWG Cat. 6   | 0.250 (6.3)                        | 1        |
|                            | 4-pair, 24 AWG Cat. 6a* | 0.354 (8.9)                        | 0        |
|                            | 25-pair, 24 AWG         | 0.410 (10.4)                       | 0        |
| COAXIAL                    | RG6/U                   | 0.270 (6.9)                        | 1        |
| FIBER                      | Zip Cord                | 0.118 x 0.236 (3 x 6)              | 2        |
|                            | Round 4 Strand Fiber    | 0.187 (4.8)                        | 2        |
|                            | Round 6 Strand Fiber    | 0.256 (6.5)                        | 1        |

**NOTE:** Uniduct Series Raceway is not UL Listed and is only designed for use in protecting low voltage wiring and cabling.

### Uniduct 2800 Series Raceway Wire Fill Capacity Chart

|                            | CABLE/WIRE SIZE         | O.D. (Approx. Dia.)<br>Inches (mm) | 40% FILL |
|----------------------------|-------------------------|------------------------------------|----------|
| UNSHIELDED<br>TWISTED PAIR | 4-pair, 24 AWG Cat. 3   | 0.190 (4.8)                        | 4        |
|                            | 4-pair, 24 AWG Cat. 5e  | 0.210 (5.3)                        | 3        |
|                            | 4-pair, 24 AWG Cat. 6   | 0.250 (6.3)                        | 2        |
|                            | 4-pair, 24 AWG Cat. 6a* | 0.354 (8.9)                        | 1        |
|                            | 25-pair, 24 AWG         | 0.410 (10.4)                       | 1        |
| COAXIAL                    | RG6/U                   | 0.270 (6.9)                        | 2        |
| FIBER                      | Zip Cord                | 0.118 x 0.236 (3 x 6)              | 4        |
|                            | Round 4 Strand Fiber    | 0.187 (4.8)                        | 4        |
|                            | Round 6 Strand Fiber    | 0.256 (6.5)                        | 2        |

### Uniduct 2900 Series Raceway Wire Fill Capacity Chart

|                            | CABLE/WIRE SIZE         | O.D. (Approx. Dia.)<br>Inches (mm) | 40% FILL |
|----------------------------|-------------------------|------------------------------------|----------|
| UNSHIELDED<br>TWISTED PAIR | 4-pair, 24 AWG Cat. 3   | 0.190 (4.8)                        | 12       |
|                            | 4-pair, 24 AWG Cat. 5e  | 0.210 (5.3)                        | 10       |
|                            | 4-pair, 24 AWG Cat. 6   | 0.250 (6.3)                        | 7        |
|                            | 4-pair, 24 AWG Cat. 6a* | 0.354 (8.9)                        | 3        |
|                            | 25-pair, 24 AWG         | 0.410 (10.4)                       | 2        |
| COAXIAL                    | RG6/U                   | 0.270 (6.9)                        | 6        |
| FIBER                      | Zip Cord                | 0.118 x 0.236 (3 x 6)              | 12       |
|                            | Round 4 Strand Fiber    | 0.187 (4.8)                        | 12       |
|                            | Round 6 Strand Fiber    | 0.256 (6.5)                        | 6        |


**NOTE:** Wire capacity is reduced to allow for proper conductor bend radius and maximum permissible heat rise.

\* Category 6 augmented (6a) cable for 10 gigabit ethernet – max allowed cable diameter per addenda No. 11 ANSI TIA/EIA 568-B.2.


## Uniduct Raceway Profiles

**Uniduct Latching Raceway** – One-piece latching raceway with co-extruded design, smooth plastic finish.  
Available in both 6' and 8' (1.8m and 2.4m) lengths.


2700/2700L8







2800/2800L8



2900/2900L8



## Fittings for Uniduct Latching Raceway

| Catalog No./Item        | Description/Specifications                                                                                                                                                                                                                                                                                                                                                                                                                                             |               |   |       |                        |           |                    |        |                        |               |
|-------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|---|-------|------------------------|-----------|--------------------|--------|------------------------|---------------|
| 2706<br>2806<br>2906    | <b>Cover Clip</b> – Covers joint where sections of 2700, 2800 or 2900 Series Raceway Cover come together.<br> <table><tr><th>Cat. No.</th><th>A</th></tr><tr><td>2706</td><td>1" (25mm)</td></tr><tr><td>2806</td><td>1 1/2" (38mm)</td></tr><tr><td>2906</td><td>2" (51mm)</td></tr></table>                                                                                         | Cat. No.      | A | 2706  | 1" (25mm)              | 2806      | 1 1/2" (38mm)      | 2906   | 2" (51mm)              |               |
| Cat. No.                | A                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |               |   |       |                        |           |                    |        |                        |               |
| 2706                    | 1" (25mm)                                                                                                                                                                                                                                                                                                                                                                                                                                                              |               |   |       |                        |           |                    |        |                        |               |
| 2806                    | 1 1/2" (38mm)                                                                                                                                                                                                                                                                                                                                                                                                                                                          |               |   |       |                        |           |                    |        |                        |               |
| 2906                    | 2" (51mm)                                                                                                                                                                                                                                                                                                                                                                                                                                                              |               |   |       |                        |           |                    |        |                        |               |
| 2710B<br>2810B<br>2910B | <b>Blank End Fitting</b> – Closes off open ends of 2700, 2800 or 2900 Series Raceway.<br> <table><tr><th>Cat. No.</th><th>A</th></tr><tr><td>2710B</td><td>1" (25mm)</td></tr><tr><td>2810B</td><td>1 3/8" (35mm)</td></tr><tr><td>2910B</td><td>1 3/4" (44mm)</td></tr></table>                                                                                                     | Cat. No.      | A | 2710B | 1" (25mm)              | 2810B     | 1 3/8" (35mm)      | 2910B  | 1 3/4" (44mm)          |               |
| Cat. No.                | A                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |               |   |       |                        |           |                    |        |                        |               |
| 2710B                   | 1" (25mm)                                                                                                                                                                                                                                                                                                                                                                                                                                                              |               |   |       |                        |           |                    |        |                        |               |
| 2810B                   | 1 3/8" (35mm)                                                                                                                                                                                                                                                                                                                                                                                                                                                          |               |   |       |                        |           |                    |        |                        |               |
| 2910B                   | 1 3/4" (44mm)                                                                                                                                                                                                                                                                                                                                                                                                                                                          |               |   |       |                        |           |                    |        |                        |               |
| 2711<br>2811<br>2911    | <b>90° Flat Elbow</b> – Makes right angle turns on same surface.<br> <table><tr><th>Cat. No.</th><th>A</th></tr><tr><td>2711</td><td>1 1/2" (38mm) Each Leg</td></tr><tr><td>2811</td><td>2" (51mm) Each Leg</td></tr><tr><td>2911</td><td>2 3/4" (70mm) Each Leg</td></tr></table>                                                                                                 | Cat. No.      | A | 2711  | 1 1/2" (38mm) Each Leg | 2811      | 2" (51mm) Each Leg | 2911   | 2 3/4" (70mm) Each Leg |               |
| Cat. No.                | A                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |               |   |       |                        |           |                    |        |                        |               |
| 2711                    | 1 1/2" (38mm) Each Leg                                                                                                                                                                                                                                                                                                                                                                                                                                                 |               |   |       |                        |           |                    |        |                        |               |
| 2811                    | 2" (51mm) Each Leg                                                                                                                                                                                                                                                                                                                                                                                                                                                     |               |   |       |                        |           |                    |        |                        |               |
| 2911                    | 2 3/4" (70mm) Each Leg                                                                                                                                                                                                                                                                                                                                                                                                                                                 |               |   |       |                        |           |                    |        |                        |               |
| 2811FO<br>2911FO        | <b>Bend Radius Compliant Flat Elbow</b> – Makes right angle turns on the same surface. Maintains 1 1/4" (32mm) bend radius control when installing UTP and fiber optic cable.<br> <table><tr><th>Cat. No.</th><th>A</th><th>B</th></tr><tr><td>2811FO</td><td>3" (76mm)</td><td>2 1/4" (57mm)</td></tr><tr><td>2911FO</td><td>3 1/2" (89mm)</td><td>2 1/4" (57mm)</td></tr></table> | Cat. No.      | A | B     | 2811FO                 | 3" (76mm) | 2 1/4" (57mm)      | 2911FO | 3 1/2" (89mm)          | 2 1/4" (57mm) |
| Cat. No.                | A                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | B             |   |       |                        |           |                    |        |                        |               |
| 2811FO                  | 3" (76mm)                                                                                                                                                                                                                                                                                                                                                                                                                                                              | 2 1/4" (57mm) |   |       |                        |           |                    |        |                        |               |
| 2911FO                  | 3 1/2" (89mm)                                                                                                                                                                                                                                                                                                                                                                                                                                                          | 2 1/4" (57mm) |   |       |                        |           |                    |        |                        |               |

## Catalog No./Item

## Description/Specifications

2715  
2815  
2915

**Tee** – Makes right angle branches of 2700, 2800, or 2900 Series Raceway.

| Cat. No. | A              | B              |
|----------|----------------|----------------|
| 2700     | 1 1/16" (17mm) | 2 3/16" (56mm) |
| 2800     | 7/8" (22mm)    | 2 7/8" (73mm)  |
| 2900     | 1 1/8" (29mm)  | 3 7/8" (98mm)  |

2815FO  
2915FO

**Bend Radius Compliant Tee** – Makes right angle branches of 2700, 2800, or 2900 Series Raceway. Maintains 1 1/4" (32mm) bend radius control when installing UTP and fiber optic cable.

| Cat. No. | A               | B              | C             | D             |
|----------|-----------------|----------------|---------------|---------------|
| 2815FO   | 1 15/16" (49mm) | 5" (127mm)     | 1 1/4" (32mm) | 3 1/2" (89mm) |
| 2915FO   | 1 15/16" (49mm) | 5 1/2" (140mm) | 1 1/4" (32mm) | 4" (102mm)    |









2717  
2817  
2917

**Internal Elbow** – Makes right angle turns around internal corners.

| Cat. No. | A                      |
|----------|------------------------|
| 2717     | 1 1/4" (32mm) Each Leg |
| 2817     | 1 1/2" (38mm) Each Leg |
| 2917     | 2 1/4" (57mm) Each Leg |


**NOTE:** No suffix denotes Ivory finish. Add "-WH" suffix for White finish and "-FW" suffix for Fog White finish.

## Fittings for Uniduct Latching Raceway (continued)

| Catalog No./Item     | Description/Specifications                                                                                                                                                                                                                                                 | Catalog No./Item | Description/Specifications                                                                                                                                                                        |
|----------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 2817FO<br>2917FO     | <b>Bend Radius Compliant Internal Elbow</b> – Makes right angle turns around internal corners. Maintains 1 1/4" (32mm) bend radius control when installing UTP and fiber optic cable.<br> | 2889             | <b>Reducing Connector (2800 – 2700)</b> – Makes transition from 2800 Series Raceway to 2700 Series Raceway.<br> |
| 2718<br>2818<br>2918 | <b>External Elbow</b> – Makes right angle turns around external corners.<br>                                                                                                              | 2989             | <b>Reducing Connector (2900 – 2800)</b> – Makes transition from 2900 Series Raceway to 2800 Series Raceway.<br> |
| 2818FO<br>2918FO     | <b>Bend Radius Compliant External Elbow</b> – Makes right angle turns around external corners. Maintains 1 1/4" (32mm) bend radius control when installing UTP and fiber optic cable.<br> | 2989A            | <b>Reducing Connector (2900-2700)</b> – Makes transition from 2900 Series Raceway to 2700 Series Raceway.<br>   |
| 2786<br>2886<br>2986 | <b>Drop Ceiling Connector</b> – Connects drops of cables from ceiling into the raceway.<br>                                                                                             | PVC-1            | <b>PVC Cutter</b> – Regular duty cutter. Ideal for use with Uniduct 2700, 2800, and 2900 Series Raceway.<br>   |

**NOTE:** No suffix denotes Ivory finish. Add "-WH" suffix for White finish and "-FW" suffix for Fog White finish.


## Uniduct Communication & Device Box Compatibility

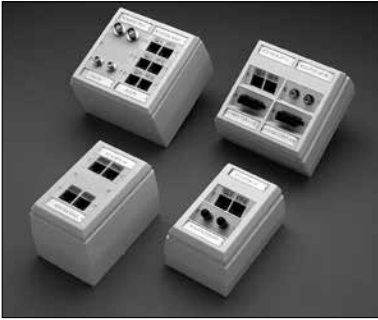

Uniduct boxes with Pass & Seymour Activate™ Inserts. Activate Inserts can be mounted flush or angled, on either one-gang or two-gang boxes depending on the application.



Bend Radius Compliant Fittings for 2800 and 2900 Series Raceways. Maintain 1 1/4" (32mm) bend radius when installing UTP and fiber optic cable.

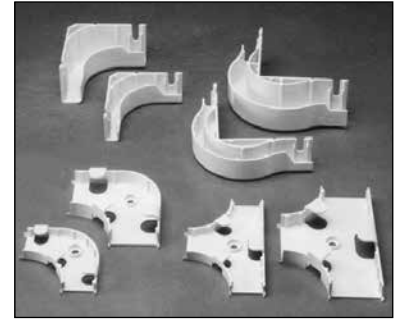

For ease of installing cables, the base has cable retention fingers that hold the cables in place until the cover is installed.

### Communication & Device Boxes for use with Uniduct Latching Raceway

| Catalog No./Item      | Description/Specifications                                                                                                                                                                                                                                        | Catalog No./Item     | Description/Specifications                                                                                                                                                                                                                                                                                                          |
|-----------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>CM-MMB-291</b><br> | <b>One Insert Multimedia Box</b> – Accepts one 2A size Wiremold Open System CM2 Module or one Pass & Seymour Activate Series Insert. Compatible with Uniduct 2700 and 2800 Series Raceways.                                                                       | <b>NM2044-2*</b><br> | <b>Two-Gang Extra Deep Device Box</b> – Mounts multiple voice and data devices when additional depth is required. Has concentric twistouts for 2700, 2800, 2900, and NM2000 Series Raceways on both sides of device box. Base has rectangular knockout for extension to wall box and concentric 1/2" and 3/4" trade size knockouts. |
| <b>CM-MMB-292</b><br> | <b>Two Insert Multimedia Box</b> – Accepts two 2A size Wiremold Open System CM2 Modules or two Pass & Seymour Activate Series Inserts. Includes fiber storage loop. Compatible with Uniduct 2700, 2800, and 2900 Series Raceways.                                 | <b>NM2048*</b><br>   | <b>Deep Device Box</b> – Mounts deep voice and data devices. Has concentric twistouts for 2700, 2800, 2900, and NM2000 Series Raceways on each side of device box and rectangular knockout in base for extension to wall box.                                                                                                       |
| <b>CM-MMB-293</b><br> | <b>Three Insert Multimedia Box</b> – Accepts three 2A size Wiremold Open System CM2 Modules or Three Pass & Seymour Activate Series Inserts. Includes Fiber storage loop. Compatible with 2700, 2800, and 2900 Series Raceways.                                   | <b>NM2048-2*</b><br> | <b>Two-Gang Deep Device Box</b> – Mounts multiple voice and data devices. Has concentric twistouts for 2700, 2800, 2900, and NM2000 Series Raceways on each side of device box. Base has rectangular knockout for extension to wall box and concentric 1/2" and 3/4" trade size knockouts.                                          |
| <b>NM2044*</b><br>    | <b>Extra Deep Device Box</b> – Mounts voice and data devices when additional depth is required. Has concentric twistouts for 2700, 2800, 2900, and NM2000 Series Raceways on both sides of device box and rectangular knockout in base for extension to wall box. |                      |                                                                                                                                                                                                                                                                                                                                     |

**NOTE:** No suffix denotes Ivory finish. Add "-WH" suffix for White finish and "-FW" suffix for Fog White finish.

\* Accepts industry standard NEMA faceplates for communication applications.



## NOTES



### Electrical Wiring Systems

60 Woodlawn Street  
West Hartford, CT 06110  
Phone: 1.877.BY.LEGRAND (295-3472)  
[www.legrand.us](http://www.legrand.us)

570 Applewood Crescent  
Vaughan, Ontario L4K 4B4  
Phone: 905.738.9195  
[www.legrand.ca](http://www.legrand.ca)






## One-Piece, Nonmetallic, Latching Raceway For Low Voltage Applications

Uniduct® Series 2700, 2800, 2900 Latching Raceway Systems are one-piece, single channel, nonmetallic raceways ideally suited for routing and protecting fiber optic, UTP, and other low-voltage (50V or less) cabling in an easy to install, aesthetically pleasing application.

Uniduct Series 2800 and 2900 Raceway radiused fittings (FO) maintain 1 1/4" (32mm) bend radius control and are the perfect solution for even the most demanding cabling applications.




The Uniduct Raceway design features a co-extruded flexible PVC hinge that prevents cracking and splitting even after numerous openings and closings.




### FEATURES & BENEFITS

- **One-piece design with adhesive backing.** Easy to handle. Makes installation quick and easy.
- **Available in three low profile sizes, in both 6' & 8' (1.8m & 2.4m) lengths.** Allows flexibility for cabling requirements. Six- and eight-foot (1.8m and 2.4m) lengths minimize cutting, cover clips, and scraps.
- **Three standard colors.** Stock colors are ivory, white, and fog white (matches with Ortronics® White). Consult factory for custom colors. Paintable using latex paint.
- **Durable, flexible hinge construction.** Allows for repeated openings and closings while maintaining product integrity and aesthetics. Easy open and snap-close latch facilitates installations, moves, and changes.
- **Durable, impact-resistant PVC construction.** Easy to cut and trim.
- **Full range of fittings.** Surface mount boxes and multipoint workstation outlets makes installations quick and easy.
- **Bend radius compliant fittings for 2800 and 2900 Series Raceways.** Maintain 1 1/4" (32mm) bend radius control required for UTP and fiber optic cable.
- **Datacom connectivity options.** Accepts industry standard and proprietary devices from a wide range of manufacturers to provide a seamless and aesthetically pleasing interface for voice, data, audio, and video applications at the point of use.



Uniduct® 2700 Series Raceway




Uniduct® 2800 Series Raceway



Uniduct® 2900 Series Raceway

## Uniduct Latching Raceway System Layout

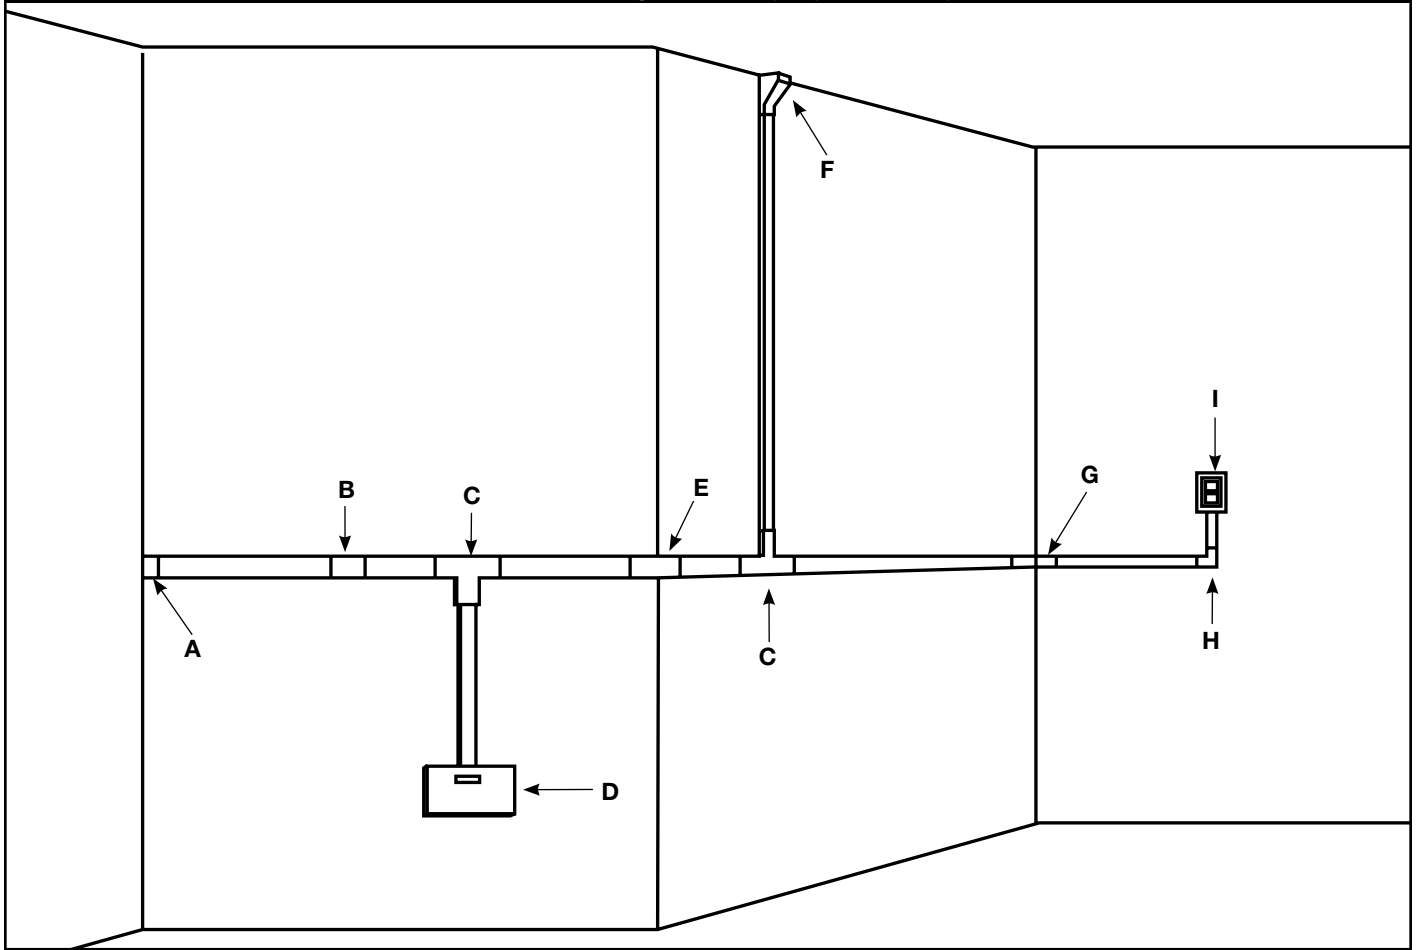

**NOTE:** Illustration is for showing product applications only.

|                              |                                          |                                   |                                       |
|------------------------------|------------------------------------------|-----------------------------------|---------------------------------------|
| <b>A — Blank End Fitting</b> | 2710B, 2810B, 2910B                      | <b>F — Drop Ceiling Connector</b> | 2786, 2886, 2986                      |
| <b>B — Cover Clip</b>        | 2706, 2806, 2906                         | <b>G — Internal Elbow</b>         | 2717, 2817, 2917                      |
| <b>C — Tee Fitting</b>       | 2715, 2815, 2915                         | <b>H — Flat Elbow</b>             | 2711, 2811, 2911                      |
| <b>D — Multimedia Box</b>    | CM-MMB-291,<br>CM-MMB-292,<br>CM-MMB-293 | <b>I — Device Box</b>             | NM2044, NM2044-2,<br>NM2048, NM2048-2 |
| <b>E — External Elbow</b>    | 2718, 2818, 2918                         |                                   |                                       |



**PEP  
eco  
PASS  
PORT®**

Download this product's PEP ecopassport® environmental product declaration at [www.legrand.us/resources-and-downloads](http://www.legrand.us/resources-and-downloads). This declaration conforms with ISO 14025 and 14040 and is in alignment with EN 15804.

## Wire Fill Capacity Charts

### Uniduct 2700 Series Raceway Wire Fill Capacity Chart

|                            | CABLE/WIRE SIZE         | O.D. (Approx. Dia.)<br>Inches (mm) | 40% FILL |
|----------------------------|-------------------------|------------------------------------|----------|
| UNSHIELDED<br>TWISTED PAIR | 4-pair, 24 AWG Cat. 3   | 0.190 (4.8)                        | 2        |
|                            | 4-pair, 24 AWG Cat. 5e  | 0.210 (5.3)                        | 1        |
|                            | 4-pair, 24 AWG Cat. 6   | 0.250 (6.3)                        | 1        |
|                            | 4-pair, 24 AWG Cat. 6a* | 0.354 (8.9)                        | 0        |
|                            | 25-pair, 24 AWG         | 0.410 (10.4)                       | 0        |
| COAXIAL                    | RG6/U                   | 0.270 (6.9)                        | 1        |
| FIBER                      | Zip Cord                | 0.118 x 0.236 (3 x 6)              | 2        |
|                            | Round 4 Strand Fiber    | 0.187 (4.8)                        | 2        |
|                            | Round 6 Strand Fiber    | 0.256 (6.5)                        | 1        |

**NOTE:** Uniduct Series Raceway is not UL Listed and is only designed for use in protecting low voltage wiring and cabling.

### Uniduct 2800 Series Raceway Wire Fill Capacity Chart

|                            | CABLE/WIRE SIZE         | O.D. (Approx. Dia.)<br>Inches (mm) | 40% FILL |
|----------------------------|-------------------------|------------------------------------|----------|
| UNSHIELDED<br>TWISTED PAIR | 4-pair, 24 AWG Cat. 3   | 0.190 (4.8)                        | 4        |
|                            | 4-pair, 24 AWG Cat. 5e  | 0.210 (5.3)                        | 3        |
|                            | 4-pair, 24 AWG Cat. 6   | 0.250 (6.3)                        | 2        |
|                            | 4-pair, 24 AWG Cat. 6a* | 0.354 (8.9)                        | 1        |
|                            | 25-pair, 24 AWG         | 0.410 (10.4)                       | 1        |
| COAXIAL                    | RG6/U                   | 0.270 (6.9)                        | 2        |
| FIBER                      | Zip Cord                | 0.118 x 0.236 (3 x 6)              | 4        |
|                            | Round 4 Strand Fiber    | 0.187 (4.8)                        | 4        |
|                            | Round 6 Strand Fiber    | 0.256 (6.5)                        | 2        |

### Uniduct 2900 Series Raceway Wire Fill Capacity Chart

|                            | CABLE/WIRE SIZE         | O.D. (Approx. Dia.)<br>Inches (mm) | 40% FILL |
|----------------------------|-------------------------|------------------------------------|----------|
| UNSHIELDED<br>TWISTED PAIR | 4-pair, 24 AWG Cat. 3   | 0.190 (4.8)                        | 12       |
|                            | 4-pair, 24 AWG Cat. 5e  | 0.210 (5.3)                        | 10       |
|                            | 4-pair, 24 AWG Cat. 6   | 0.250 (6.3)                        | 7        |
|                            | 4-pair, 24 AWG Cat. 6a* | 0.354 (8.9)                        | 3        |
|                            | 25-pair, 24 AWG         | 0.410 (10.4)                       | 2        |
| COAXIAL                    | RG6/U                   | 0.270 (6.9)                        | 6        |
| FIBER                      | Zip Cord                | 0.118 x 0.236 (3 x 6)              | 12       |
|                            | Round 4 Strand Fiber    | 0.187 (4.8)                        | 12       |
|                            | Round 6 Strand Fiber    | 0.256 (6.5)                        | 6        |


**NOTE:** Wire capacity is reduced to allow for proper conductor bend radius and maximum permissible heat rise.

\* Category 6 augmented (6a) cable for 10 gigabit ethernet – max allowed cable diameter per addenda No. 11 ANSI TIA/EIA 568-B.2.


## Uniduct Raceway Profiles

**Uniduct Latching Raceway** – One-piece latching raceway with co-extruded design, smooth plastic finish.  
Available in both 6' and 8' (1.8m and 2.4m) lengths.


2700/2700L8



2800/2800L8



2900/2900L8




## Fittings for Uniduct Latching Raceway

### Catalog No./Item

### Description/Specifications


2706  
2806  
2906



**Cover Clip** – Covers joint where sections of 2700, 2800 or 2900 Series Raceway Cover come together.

| Cat. No. | A             |
|----------|---------------|
| 2706     | 1" (25mm)     |
| 2806     | 1 1/2" (38mm) |
| 2906     | 2" (51mm)     |


2710B  
2810B  
2910B



**Blank End Fitting** – Closes off open ends of 2700, 2800 or 2900 Series Raceway.

| Cat. No. | A             |
|----------|---------------|
| 2710B    | 1" (25mm)     |
| 2810B    | 1 3/8" (35mm) |
| 2910B    | 1 3/4" (44mm) |


2711  
2811  
2911



**90° Flat Elbow** – Makes right angle turns on same surface.

| Cat. No. | A                      |
|----------|------------------------|
| 2711     | 1 1/2" (38mm) Each Leg |
| 2811     | 2" (51mm) Each Leg     |
| 2911     | 2 3/4" (70mm) Each Leg |

2811FO  
2911FO




**Bend Radius Compliant Flat Elbow** – Makes right angle turns on the same surface. Maintains 1 1/4" (32mm) bend radius control when installing UTP and fiber optic cable.

| Cat. No. | A             | B             |
|----------|---------------|---------------|
| 2811FO   | 3" (76mm)     | 2 1/4" (57mm) |
| 2911FO   | 3 1/2" (89mm) | 2 1/4" (57mm) |

### Catalog No./Item

### Description/Specifications


2715  
2815  
2915



**Tee** – Makes right angle branches of 2700, 2800, or 2900 Series Raceway.

| Cat. No. | A              | B              |
|----------|----------------|----------------|
| 2700     | 1 1/16" (17mm) | 2 3/16" (56mm) |
| 2800     | 7/8" (22mm)    | 2 7/8" (73mm)  |
| 2900     | 1 1/8" (29mm)  | 3 7/8" (98mm)  |


2815FO  
2915FO



**Bend Radius Compliant Tee** – Makes right angle branches of 2700, 2800, or 2900 Series Raceway. Maintains 1 1/4" (32mm) bend radius control when installing UTP and fiber optic cable.

| Cat. No. | A               | B              | C             | D             |
|----------|-----------------|----------------|---------------|---------------|
| 2815FO   | 1 15/16" (49mm) | 5" (127mm)     | 1 1/4" (32mm) | 3 1/2" (89mm) |
| 2915FO   | 1 15/16" (49mm) | 5 1/2" (140mm) | 1 1/4" (32mm) | 4" (102mm)    |

2717  
2817  
2917











**Internal Elbow** – Makes right angle turns around internal corners.

| Cat. No. | A                      |
|----------|------------------------|
| 2717     | 1 1/4" (32mm) Each Leg |
| 2817     | 1 1/2" (38mm) Each Leg |
| 2917     | 2 1/4" (57mm) Each Leg |


**NOTE:** No suffix denotes Ivory finish. Add "-WH" suffix for White finish and "-FW" suffix for Fog White finish.

## Fittings for Uniduct Latching Raceway (continued)


| Catalog No./Item     | Description/Specifications                                                                                                                                                                                                                                                 | Catalog No./Item | Description/Specifications                                                                                                                                                                        |
|----------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 2817FO<br>2917FO     | <b>Bend Radius Compliant Internal Elbow</b> – Makes right angle turns around internal corners. Maintains 1 1/4" (32mm) bend radius control when installing UTP and fiber optic cable.<br> | 2889             | <b>Reducing Connector (2800 – 2700)</b> – Makes transition from 2800 Series Raceway to 2700 Series Raceway.<br> |
| 2718<br>2818<br>2918 | <b>External Elbow</b> – Makes right angle turns around external corners.<br>                                                                                                              | 2989             | <b>Reducing Connector (2900 – 2800)</b> – Makes transition from 2900 Series Raceway to 2800 Series Raceway.<br> |
| 2818FO<br>2918FO     | <b>Bend Radius Compliant External Elbow</b> – Makes right angle turns around external corners. Maintains 1 1/4" (32mm) bend radius control when installing UTP and fiber optic cable.<br> | 2989A            | <b>Reducing Connector (2900-2700)</b> – Makes transition from 2900 Series Raceway to 2700 Series Raceway.<br>   |
| 2786<br>2886<br>2986 | <b>Drop Ceiling Connector</b> – Connects drops of cables from ceiling into the raceway.<br>                                                                                             | PVC-1            | <b>PVC Cutter</b> – Regular duty cutter. Ideal for use with Uniduct 2700, 2800, and 2900 Series Raceway.<br>   |

**NOTE:** No suffix denotes Ivory finish. Add "-WH" suffix for White finish and "-FW" suffix for Fog White finish.


## Uniduct Communication & Device Box Compatibility

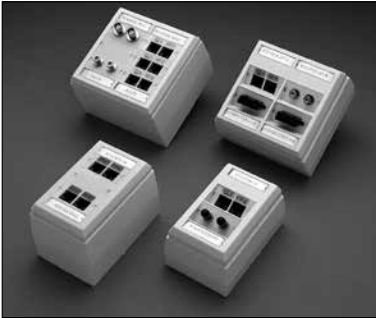

Uniduct boxes with Pass & Seymour Activate™ Inserts. Activate Inserts can be mounted flush or angled, on either one-gang or two-gang boxes depending on the application.

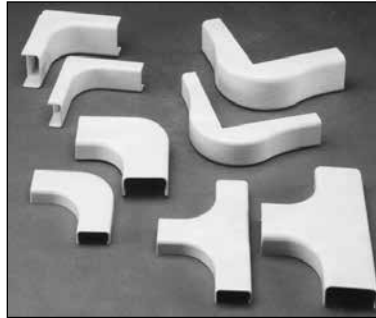

Bend Radius Compliant Fittings for 2800 and 2900 Series Raceways. Maintain 1 1/4" (32mm) bend radius when installing UTP and fiber optic cable.

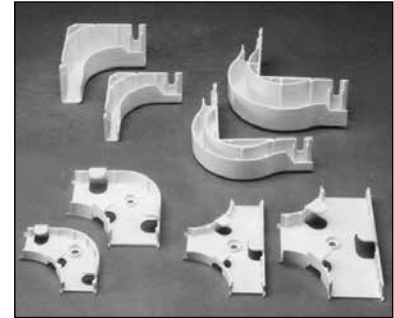

For ease of installing cables, the base has cable retention fingers that hold the cables in place until the cover is installed.

### Communication & Device Boxes for use with Uniduct Latching Raceway

| Catalog No./Item      | Description/Specifications                                                                                                                                                                                                                                        | Catalog No./Item     | Description/Specifications                                                                                                                                                                                                                                                                                                          |
|-----------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>CM-MMB-291</b><br> | <b>One Insert Multimedia Box</b> – Accepts one 2A size Wiremold Open System CM2 Module or one Pass & Seymour Activate Series Insert. Compatible with Uniduct 2700 and 2800 Series Raceways.                                                                       | <b>NM2044-2*</b><br> | <b>Two-Gang Extra Deep Device Box</b> – Mounts multiple voice and data devices when additional depth is required. Has concentric twistouts for 2700, 2800, 2900, and NM2000 Series Raceways on both sides of device box. Base has rectangular knockout for extension to wall box and concentric 1/2" and 3/4" trade size knockouts. |
| <b>CM-MMB-292</b><br> | <b>Two Insert Multimedia Box</b> – Accepts two 2A size Wiremold Open System CM2 Modules or two Pass & Seymour Activate Series Inserts. Includes fiber storage loop. Compatible with Uniduct 2700, 2800, and 2900 Series Raceways.                                 | <b>NM2048*</b><br>   | <b>Deep Device Box</b> – Mounts deep voice and data devices. Has concentric twistouts for 2700, 2800, 2900, and NM2000 Series Raceways on each side of device box and rectangular knockout in base for extension to wall box.                                                                                                       |
| <b>CM-MMB-293</b><br> | <b>Three Insert Multimedia Box</b> – Accepts three 2A size Wiremold Open System CM2 Modules or Three Pass & Seymour Activate Series Inserts. Includes Fiber storage loop. Compatible with 2700, 2800, and 2900 Series Raceways.                                   | <b>NM2048-2*</b><br> | <b>Two-Gang Deep Device Box</b> – Mounts multiple voice and data devices. Has concentric twistouts for 2700, 2800, 2900, and NM2000 Series Raceways on each side of device box. Base has rectangular knockout for extension to wall box and concentric 1/2" and 3/4" trade size knockouts.                                          |
| <b>NM2044*</b><br>    | <b>Extra Deep Device Box</b> – Mounts voice and data devices when additional depth is required. Has concentric twistouts for 2700, 2800, 2900, and NM2000 Series Raceways on both sides of device box and rectangular knockout in base for extension to wall box. |                      |                                                                                                                                                                                                                                                                                                                                     |

**NOTE:** No suffix denotes Ivory finish. Add "-WH" suffix for White finish and "-FW" suffix for Fog White finish.

\* Accepts industry standard NEMA faceplates for communication applications.



## NOTES



### Electrical Wiring Systems

60 Woodlawn Street  
West Hartford, CT 06110  
Phone: 1.877.BY.LEGRAND (295-3472)  
[www.legrand.us](http://www.legrand.us)

570 Applewood Crescent  
Vaughan, Ontario L4K 4B4  
Phone: 905.738.9195  
[www.legrand.ca](http://www.legrand.ca)

