




F32T8/841 Lamp Specifications

TCP Item Number: 31032841 Lamp code: F32T8/841



Average Rated Life (hours)
3 hours per start ----- 24,000

TCLP Compliant ----- Yes

Low Mercury ----- Yes

Physical Characteristics

Lamp type ----- T8
Base type ----- BiPin (G13)
Lamp Material ----- Soda Lime
Phosphor ----- Tri-Phosphor
Lamp Diameter (inches)
Nominal (D) ----- 1.00
Maximum (D) ----- 1.10
Minimum (D) ----- .94
Overall Length (inches)
Nominal (C) ----- 48.00
Maximum (C) ----- 47.78
Minimum (C) ----- 47.67
Face to End of opposing pin (inches)
Maximum (B) ----- 47.50
Minimum (B) ----- 47.40

Photometric Characteristics


Initial Lumens ----- 2950
Mean Lumens (40% of rated life) ----- 2800
Correlated Color Temperature (Kelvin) ----- 4100
Color Rendering Index (CRI) ----- 85
Normal Efficacy (Lumens/Watts) ----- 92

Electrical Characteristics


Lamp Watts ----- 32
Nominal Lamp Volts ----- 132
Nominal Lamp Operating Frequency (Hz) -- 50-60 Hz
Min. Starting Lamp Voltage at 10°C ----- 300
Min. Cathode Resistance (Rh/Rc) ----- 4.25
Max. Cathode Resistance (Rh/Rc) ----- 6.50

24 MONTH
STANDARD WARRANTY


Spectral Power Distribution

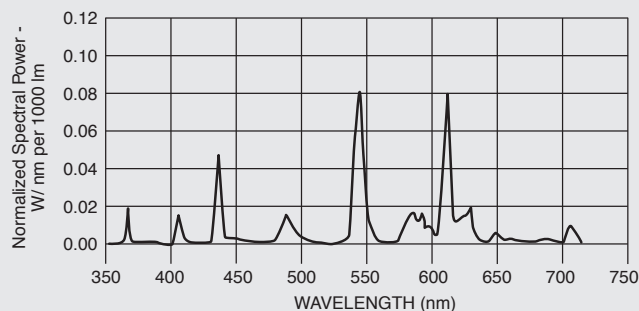

Lamp Lumen Maintenance

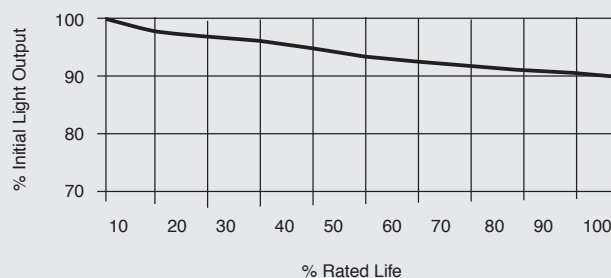

Typical Lamp Mortality

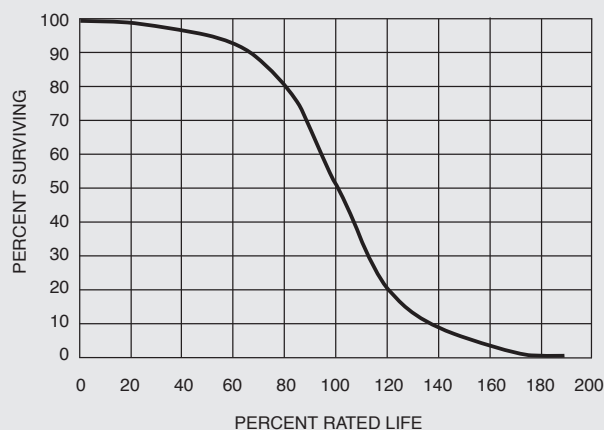

*Testing performed with Instant Start Ballast.

For the most up-to-date specs, please visit www.tcp.com

TCP, Inc.

325 Campus Dr. | Aurora, Ohio 44202 | P: 1-800-324-1496 | F: 330-995-6188 | tcp.com

©TCP, Inc. SEPT 2013/51072


TCP is proud to have been awarded
ENERGY STAR® Partner of the Year 2013.





F32T8/841 Lamp Specifications

TCP Item Number: 31032841 Lamp code: F32T8/841



Average Rated Life (hours)
3 hours per start ----- 24,000

TCLP Compliant ----- Yes

Low Mercury ----- Yes

Physical Characteristics

Lamp type ----- T8
Base type ----- BiPin (G13)
Lamp Material ----- Soda Lime
Phosphor ----- Tri-Phosphor
Lamp Diameter (inches)
Nominal (D) ----- 1.00
Maximum (D) ----- 1.10
Minimum (D) ----- .94
Overall Length (inches)
Nominal (C) ----- 48.00
Maximum (C) ----- 47.78
Minimum (C) ----- 47.67
Face to End of opposing pin (inches)
Maximum (B) ----- 47.50
Minimum (B) ----- 47.40

Photometric Characteristics


Initial Lumens ----- 2950
Mean Lumens (40% of rated life) ----- 2800
Correlated Color Temperature (Kelvin) ----- 4100
Color Rendering Index (CRI) ----- 85
Normal Efficacy (Lumens/Watts) ----- 92

Electrical Characteristics


Lamp Watts ----- 32
Nominal Lamp Volts ----- 132
Nominal Lamp Operating Frequency (Hz) -- 50-60 Hz
Min. Starting Lamp Voltage at 10°C ----- 300
Min. Cathode Resistance (Rh/Rc) ----- 4.25
Max. Cathode Resistance (Rh/Rc) ----- 6.50

24 MONTH
STANDARD WARRANTY


Spectral Power Distribution

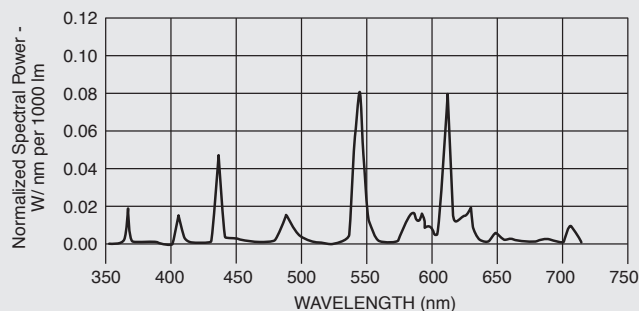

Lamp Lumen Maintenance

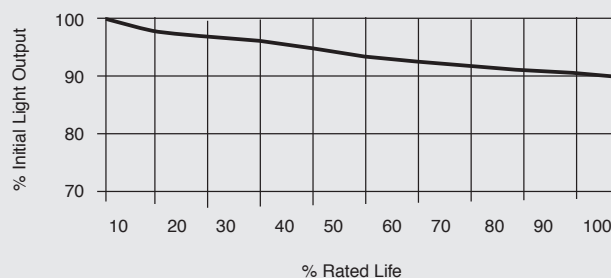

Typical Lamp Mortality

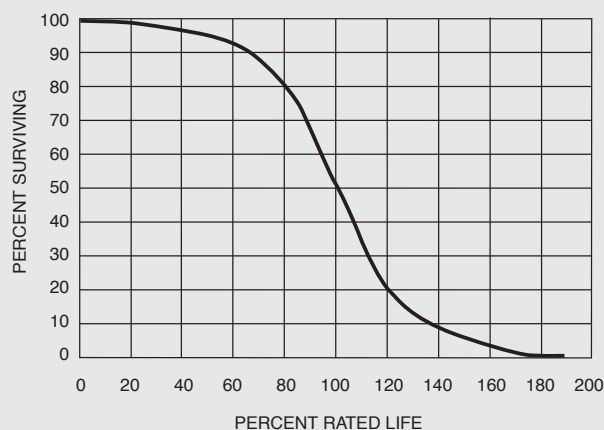

*Testing performed with Instant Start Ballast.

For the most up-to-date specs, please visit www.tcp.com

TCP, Inc.

325 Campus Dr. | Aurora, Ohio 44202 | P: 1-800-324-1496 | F: 330-995-6188 | tcp.com

©TCP, Inc. SEPT 2013/51072

TCP is proud to have been awarded
ENERGY STAR® Partner of the Year 2013.

