


# PVC Utility Duct

- Conforms to ASTM F 512 and NEMA TC 6/8
- DB for direct burial or concrete-encased applications
- EB for concrete-encased applications
- Standard overall pipe length is 20-feet

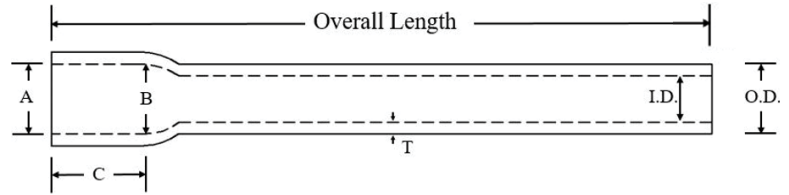

| Trade Size | Part Number |         |         |         |         | Crate Quantity (ft) |
|------------|-------------|---------|---------|---------|---------|---------------------|
|            | DB60        | DB100   | DB120   | EB20    | EB35    |                     |
| 1          | —           | —       | 1210020 | —       | —       | 7,200               |
| 1½         | —           | —       | 1215020 | —       | —       | 4,500               |
| 2          | 6020020     | —       | 1220020 | 2020020 | 3520020 | 2,800               |
| 3          | 6030020     | 1030020 | 1230020 | 2030020 | 3530020 | 1,760               |
| 4          | 6040020     | 1040020 | 1240020 | 2040020 | 3540020 | 1,140               |
| 5          | 6050020     | 1050020 | 1250020 | 2050020 | 3550020 | 760                 |
| 6          | 6060020     | 1060020 | 1260020 | 2060020 | 3560020 | 520                 |

| Trade Size | Dimensions (in) |                                             |       |       |       |       |                 |               |               |
|------------|-----------------|---------------------------------------------|-------|-------|-------|-------|-----------------|---------------|---------------|
|            | Average OD      | Minimum Wall Thickness, T (E = 500,000 psi) |       |       |       |       | Bell Entrance A | Bell Bottom B | Bell Length C |
|            |                 | DB60                                        | DB100 | DB120 | EB20* | EB35  |                 |               |               |
| 1          | 1.315           | —                                           | —     | 0.060 | —     | —     | 1.330           | 1.310         | 2.25          |
| 1½         | 1.900           | —                                           | —     | 0.060 | —     | —     | 1.918           | 1.894         | 2.75          |
| 2          | 2.375           | 0.060                                       | —     | 0.077 | 0.060 | 0.060 | 2.393           | 2.369         | 4.00          |
| 3          | 3.500           | 0.092                                       | 0.112 | 0.118 | 0.061 | 0.076 | 3.515           | 3.492         | 4.00          |
| 4          | 4.500           | 0.121                                       | 0.145 | 0.154 | 0.082 | 0.100 | 4.515           | 4.491         | 5.00          |
| 5          | 5.563           | 0.152                                       | 0.179 | 0.191 | 0.103 | 0.126 | 5.593           | 5.553         | 5.75          |
| 6          | 6.625           | 0.182                                       | 0.213 | 0.227 | 0.125 | 0.152 | 6.658           | 6.614         | 6.50          |

\*Consult manufacturer for product listing information