Thin Wall Conduit Fittings (for EMT Conduit)

Set Screw Type Fittings – Product of the USA

PRODUCT OF THE USA FITTINGS

Applications:

Product of the USA conduit fittings are used:

- To join EMT to a box or enclosure
- To couple two ends of EMT conduit

Features:

- All connectors available with or without insulated throat
- Hex surfaces on fitting body and compression nut for easy wrenching
- Couplings utilize a ridge center stop for easy identification of adequate conduit sealing within the coupling
- Set screw connectors and couplings utilize a #2 combination head screw for secure installation
- Thick steel conduit locknut provides a strong, secure installation
- Made in the USA

Certifications and Compliances:

- cULus Listed
- Set screw connectors and couplings – concrete tight when tapped

Standard Materials and Finishes:

- Steel
- Zinc electroplated

Straight Connectors – Insulated

UL File No. E-22132

Cat. #	Size	Unit Qty.	Wt. Lbs. Per 100
1450US	½″	50	10
1451US	¾″	25	14
1452US	1″	20	23
1453US	1¼″	5	40
1454US	1½″	5	52
1455US	2″	20	80
1456US	2½″	6	142
1457US	3″	6	183
1458US	3½″	3	250
1459US	4″	3	283

Straight Connectors – Non-insulated

UL File No. E-22132

Cat. #	Size	Unit Qty.	Wt. Lbs. Per 100
450SUS	½″	50	10
451US	¾″	25	14
452US	1″	20	23
453US	1¼″	5	40
454US	1½″	5	52
455US	2″	20	80
456US	2½″	6	142
457US	3″	6	183
458US	3½″	3	250
459US	4″	3	283

Couplings

UL File No. E-22132



Cat. #	Size	Unit Qty.	Wt. Lbs. Per 100
460US	½″	50	10
461US	¾″	25	15
462US	1″	10	24
463US	1¼″	5	44
464US	1½″	5	68
465US	2″	20	90
466US	2½″	5	158
467US	3″	3	217
468US	3½″	2	250
469US	4″	2	283

EATON CROUSE-HINDS SERIES

Thin Wall Conduit Fittings (for EMT Conduit)

Compression Type Fittings – Product of the USA

PRODUCT OF THE USA FITTINGS

Applications:

Product of the USA conduit fittings are used:

- To join EMT to a box or enclosure
- To couple two ends of EMT conduit

Features:

- All connectors available with or without insulated throat
- Hex surfaces on fitting body and compression nut for easy wrenching
- Couplings utilize a ridge center stop for easy identification of adequate conduit sealing within the coupling
- Set screw connectors and couplings utilize a #2 combination head screw for secure installation
- Thick steel conduit locknut provides a strong, secure installation
- Made in the USA

Certifications and Compliances:

- cULus Listed
- Compression connectors and couplings – concrete tight

Standard Materials and Finishes:

- Steel
- Zinc electroplated

Connectors – Insulated

UL File No. E-22132

Cat. #	Size	Unit Qty.	Wt. Lbs. Per 100
1650US	½″	50	8
1651US	¾″	25	12
1652US	1″	20	19
1653US	1¼″	5	30
1654US	1½″	5	46
1655US	2″	5	55
1656US	2½″	5	242
1657US	3″	3	307
1658US	3½″	3	390
1659US	4″	2	492

Connectors – Non-insulated

UL File No. E-22132

Cat. #	Size	Unit Qty.	Wt. Lbs. Per 100
650SUS	½″	50	8
651SUS	¾″	25	12
652US	1″	20	19
653US	1¼″	5	30
654US	1½″	5	46
655US	2″	5	55
656US	2½″	5	242
657US	3″	3	307
658US	3½″	3	390
659US	4″	2	492

Couplings

UL File No. E-22132

Cat. #	Size	Unit Qty.	Wt. Lbs. Per 100
660SUS	½″	50	8
661SUS	¾″	25	13
662US	1″	20	19
663US	1¼″	5	30
664US	1½″	5	46
665US	2″	5	60
666US	2½″	5	360
667US	3″	3	405
668US	3½″	2	545
669US	4″	2	635

 Copyright© 2015 Commercial Products Catalog

Thin Wall Conduit Fittings (for EMT Conduit)

Compression Type Fittings – Product of the USA – Raintight

PRODUCT OF THE USA FITTINGS

Applications:

Product of the USA conduit fittings are used:

- To join EMT to a box or enclosure in raintight environments
- To prevent water seepage into conduit, box or enclosure

Features:

- Flat surface on gland nut provides smooth, flat surface for easy wrenching
- Integral gasketed compression ring secures and seals for reliable installation
- Gasket on male threads of box connector seals installation for raintight connection between the box and the connector
- Available in insulated and non-insulated versions to meet any customer preference
- Angled teeth on locknut for secure bite into enclosure
- Extruded locknut with shoulder provides more threads for more secure installation
- Concrete tight
- Product of the USA

Certifications and Compliances:

- cULus Listed
- Concrete tight
- Raintight

Standard Materials and Finishes:

- Steel
- Zinc electroplated

Product of the USA

Connectors – Insulated – Raintight

UL File No. E-22132

Cat. #	Size	Unit Qty.	Wt. Lbs. Per 100
1650RTUS	½″	50	8
1651RTUS	¾″	25	12
1652RTUS	1″	20	19
1653RTUS	1¼″	5	30
1654RTUS	1½″	5	46
1655RTUS	2″	5	55
1656RTUS	2½″	1	242
1657RTUS	3″	1	307
1658RTUS	3½ ″	1	390
1659RTUS	4″	1	492

Connectors – Non-insulated – Raintight

UL File No. E-22132

Cat. #	Size	Unit Qty.	Wt. Lbs. Per 100
650RTUS	½″	50	8
651RTUS	¾″	25	12
652RTUS	1″	20	19
653RTUS	1¼″	5	30
654RTUS	1½″	5	46
655RTUS	2″	5	55
656RTUS	2½″	1	242
657RTUS	3″	1	307
658RTUS	3½ ″	1	390
659RTUS	4″	1	492

Couplings – Raintight

UL File No. E-22132

Cat. #	Size	Unit Qty.	Wt. Lbs. Per 100
660RTUS	½″	50	8
661RTUS	¾″	25	13
662RTUS	1″	20	19
663RTUS	1¼″	5	30
664RTUS	1½″	5	46
665RTUS	2″	5	60
666RTUS	2½″	1	360
667RTUS	3″	1	405
668RTUS	3½ ″	1	545
669RTUS	4″	1	635

 Copyright© 2015 Commercial Products Catalog

Thin Wall Conduit Fittings (for EMT Conduit)

Conduit Fittings – Product of the USA

STRAPS – STEEL GALVANIZED PRODUCT OF THE USA

Two Hole

UL File No. E-184283

Cat. #	Size	Unit Qty.	Wt. Lbs. Per 100
497 1US	1/2″	250	2
497 2US	3/4″	150	3
497 3US	1″	100	5
497 4US	1 1/4″	50	8
497 5US	1 1/2″	50	13
497 6US	2″	25	14

CLAMPS – STEEL PRODUCT OF THE USA

Applications:

- To support EMT conduit to mounting surface

UL File No. E-184283

Cat. #	Size	Unit Qty.	Wt. Lbs. Per 100
200US	1/2″	100	5
201US	3/4″	100	6
202US	1″	100	6
203US*	1 1/4″	50	13
204US*	1 1/2″	25	17
205US*	2″	25	20
206US*	2 1/2″	25	64
207US*	3″	25	71
208US*	3 1/2″	25	120
209US*	4″	10	130

*Not UL Listed or cUL Listed.

NAILING STRAPS – STAMPED STEEL PRODUCT OF THE USA

Applications:

- To secure EMT conduit

Standard Material:

- Pre-galvanized stamped steel



Cat. #	Conduit Size	Unit Qty.	Wt. Lbs. Per 100
NSS1US	1/2″	100	2
NSS2US	3/4″	100	2
NSS3US	1″	100	3

Dimensions (in Inches):

Cat. #	A	B	C	Radius
NSS1US	2.100	1.040	0.080	0.350
NSS2US	2.300	1.275	0.080	0.460
NSS3US	2.200	1.500	0.080	0.580



Product of the USA

Conduit Fittings – Product of the USA

THREE-PIECE CONDUIT COUPLINGS – STEEL PRODUCT OF THE USA

Applications:

- To join two lengths of threaded conduit; couples conduit when conduit cannot be turned

Standard Material:

- Heavy duty casting

Standard Finish:

- Zinc plated

Steel

UL File No. E-19189

Cat. #	Size	Unit Qty.	Wt. Lbs. Per 100
190US	1/2″	20	36
191US	3/4″	20	32
192US	1″	5	55
193US	1 1/4″	5	119
194US	1 1/2″	5	140
195US	2″	5	199

CONDUIT LOCKNUTS – STEEL PRODUCT OF THE USA

UL File No. E-19189

Cat. #	Size	Unit Qty.	Wt. Lbs. Per 100
11USA	1/2″	200	1
12USA	3/4″	100	2
13USA	1″	50	4
14USA	1 1/4″	50	7
15USA	1 1/2″	25	8
16USA	2″	25	9

STRAPS – STEEL GALVANIZED PRODUCT OF THE USA

Applications:

- Used to secure rigid conduit or IMC to mounting surface

Two Hole

UL File No. E-184283

Cat. #	Size	Unit Qty.	Wt. Lbs. Per 100
496 3US	1/2″	150	2
496 4US	3/4″	100	3
496 5US	1″	50	7
496 6US	1 1/4″	50	8
496 7US	1 1/2″	50	10
496 8US	2″	25	15
496 9US	2 1/2″	25	19
496 10US	3″	25	23
496 11US	3 1/2″	25	93
496 12US	4″	10	108

CLAMPS – STEEL PRODUCT OF THE USA

Applications:

- To support rigid conduit and IMC to mounting surface

Cat. #	Size	Unit Qty.	Wt. Lbs. Per 100
410US	1/2″	100	5
411US	3/4″	50	6
412US	1″	50	11
413US	1 1/4″	50	13
414US	1 1/2″	25	20
415US	2″	25	22

BEAM CLAMPS/INSULATOR SUPPORTS – STEEL PRODUCT OF THE USA

Cat. #	Base Size	Jaw Opening	Tapped Holes	Unit Qty.	Wt. Lbs. Per 100
529SUS	3/4″	5/8″	1/4″ - 20	300	13

EATON CROUSE-HINDS SERIES

Conduit Fittings – Product of the USA

TYPE CPR COMPRESSION FITTINGS PRODUCT OF THE USA

Applications:

Use Type CPR Product of the USA Compression Fittings for:

- Both IMC and metallic rigid conduit
- New work in poured concrete
- Maintenance, repairs and alterations
- Connections at panels and boxes
- New, altered or damaged stub-ups
- Applicable locations where field threading is impractical or undesirable

Features:

- UL Listed for use with IMC as well as metallic rigid conduit
- Unequaled versatility for the installer
- Unique gland ring design tightens up in fewer turns; provides outstanding pull-out strength; saves time and adds confidence
- Advanced, thoughtful design and premium materials team up for an installation you can be proud of

Certifications and Compliances:

- UL514B Fittings for Conduit and Outlet Boxes

Standard Materials:

- Bodies – steel
- Compression nuts – steel
- Compression rings – zinc plated steel
- Locknuts – zinc plated steel
- Insuliners – glass-reinforced polypropylene

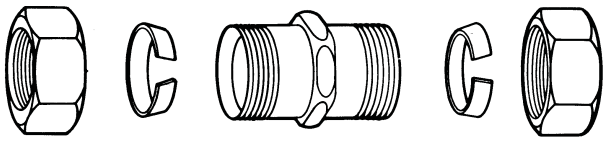

Straight Connectors – Insulated

UL File No. E-19189

Cat. #	Size	Unit Qty.	Wt. Lbs. Per 100
CPR11US	½″	25	13
CPR12US	¾″	20	20
CPR13US	1″	5	36
CPR14US	1¼″	5	48
CPR15US	1½″	5	70
CPR16US	2″	5	100

Straight Connectors – Non-insulated

UL File No. E-19189

Cat. #	Size	Unit Qty.	Wt. Lbs. Per 100
CPR1US	½″	25	13
CPR2US	¾″	20	20
CPR3US	1″	5	36
CPR4US	1¼″	5	48
CPR5US	1½″	5	70
CPR6US	2″	5	100

Couplings

UL File No. E-19189

Cat. #	Size	Unit Qty.	Wt. Lbs. Per 100
CPR21US	½″	20	16
CPR22US	¾″	20	24
CPR23US	1″	5	48
CPR24US	1¼″	5	64
CPR25US	1½″	5	110
CPR26US	2″	3	140

CABLE AND CONDUIT HANGERS – STEEL PRODUCT OF THE USA

Certifications and Compliances:

- UL Listed

With Bolt

UL File No. E-184283

Cat. #	Conduit Size EMT	Conduit Size Rigid	Unit Qty.	Wt. Lbs. Per 100
0BUS	½″	⅜″ and ½″	100	6
1BUS	¾″	¾″	100	6
2BUS	1″	1″	100	8
2 1/2BUS	1¼″	-	100	10
3BUS	1½″	1¼″	100	11
4BUS	-	1½″	100	16
5BUS	2″	2″	50	23
6BUS	2½″	2½″	50	29
7BUS	3″	3″	25	31
8BUS	3½ ″	3½″	10	38
9BUS	4″	4″	10	38

Thin Wall Conduit Fittings (for EMT Conduit)

Set Screw Type Fittings – Product of the USA

PRODUCT OF THE USA FITTINGS

Applications:

Product of the USA conduit fittings are used:

- To join EMT to a box or enclosure
- To couple two ends of EMT conduit

Features:

- All connectors available with or without insulated throat
- Hex surfaces on fitting body and compression nut for easy wrenching
- Couplings utilize a ridge center stop for easy identification of adequate conduit sealing within the coupling
- Set screw connectors and couplings utilize a #2 combination head screw for secure installation
- Thick steel conduit locknut provides a strong, secure installation
- Made in the USA

Certifications and Compliances:

- cULus Listed
- Set screw connectors and couplings – concrete tight when tapped

Standard Materials and Finishes:

- Steel
- Zinc electroplated

Straight Connectors – Insulated

UL File No. E-22132

Cat. #	Size	Unit Qty.	Wt. Lbs. Per 100
1450US	½″	50	10
1451US	¾″	25	14
1452US	1″	20	23
1453US	1¼″	5	40
1454US	1½″	5	52
1455US	2″	20	80
1456US	2½″	6	142
1457US	3″	6	183
1458US	3½″	3	250
1459US	4″	3	283

Straight Connectors – Non-insulated

UL File No. E-22132

Cat. #	Size	Unit Qty.	Wt. Lbs. Per 100
450SUS	½″	50	10
451US	¾″	25	14
452US	1″	20	23
453US	1¼″	5	40
454US	1½″	5	52
455US	2″	20	80
456US	2½″	6	142
457US	3″	6	183
458US	3½″	3	250
459US	4″	3	283

Couplings

UL File No. E-22132



Cat. #	Size	Unit Qty.	Wt. Lbs. Per 100
460US	½″	50	10
461US	¾″	25	15
462US	1″	10	24
463US	1¼″	5	44
464US	1½″	5	68
465US	2″	20	90
466US	2½″	5	158
467US	3″	3	217
468US	3½″	2	250
469US	4″	2	283

EATON CROUSE-HINDS SERIES

Thin Wall Conduit Fittings (for EMT Conduit)

Compression Type Fittings – Product of the USA

PRODUCT OF THE USA FITTINGS

Applications:

Product of the USA conduit fittings are used:

- To join EMT to a box or enclosure
- To couple two ends of EMT conduit

Features:

- All connectors available with or without insulated throat
- Hex surfaces on fitting body and compression nut for easy wrenching
- Couplings utilize a ridge center stop for easy identification of adequate conduit sealing within the coupling
- Set screw connectors and couplings utilize a #2 combination head screw for secure installation
- Thick steel conduit locknut provides a strong, secure installation
- Made in the USA

Certifications and Compliances:

- cULus Listed
- Compression connectors and couplings – concrete tight

Standard Materials and Finishes:

- Steel
- Zinc electroplated

Connectors – Insulated

UL File No. E-22132

Cat. #	Size	Unit Qty.	Wt. Lbs. Per 100
1650US	½″	50	8
1651US	¾″	25	12
1652US	1″	20	19
1653US	1¼″	5	30
1654US	1½″	5	46
1655US	2″	5	55
1656US	2½″	5	242
1657US	3″	3	307
1658US	3½″	3	390
1659US	4″	2	492

Connectors – Non-insulated

UL File No. E-22132

Cat. #	Size	Unit Qty.	Wt. Lbs. Per 100
650SUS	½″	50	8
651SUS	¾″	25	12
652US	1″	20	19
653US	1¼″	5	30
654US	1½″	5	46
655US	2″	5	55
656US	2½″	5	242
657US	3″	3	307
658US	3½″	3	390
659US	4″	2	492

Couplings

UL File No. E-22132

Cat. #	Size	Unit Qty.	Wt. Lbs. Per 100
660SUS	½″	50	8
661SUS	¾″	25	13
662US	1″	20	19
663US	1¼″	5	30
664US	1½″	5	46
665US	2″	5	60
666US	2½″	5	360
667US	3″	3	405
668US	3½″	2	545
669US	4″	2	635

 Copyright© 2015 Commercial Products Catalog

Thin Wall Conduit Fittings (for EMT Conduit)

Compression Type Fittings – Product of the USA – Raintight

PRODUCT OF THE USA FITTINGS

Applications:

Product of the USA conduit fittings are used:

- To join EMT to a box or enclosure in raintight environments
- To prevent water seepage into conduit, box or enclosure

Features:

- Flat surface on gland nut provides smooth, flat surface for easy wrenching
- Integral gasketed compression ring secures and seals for reliable installation
- Gasket on male threads of box connector seals installation for raintight connection between the box and the connector
- Available in insulated and non-insulated versions to meet any customer preference
- Angled teeth on locknut for secure bite into enclosure
- Extruded locknut with shoulder provides more threads for more secure installation
- Concrete tight
- Product of the USA

Certifications and Compliances:

- cULus Listed
- Concrete tight
- Raintight

Standard Materials and Finishes:

- Steel
- Zinc electroplated

Product of the USA

Connectors – Insulated – Raintight

UL File No. E-22132

Cat. #	Size	Unit Qty.	Wt. Lbs. Per 100
1650RTUS	½″	50	8
1651RTUS	¾″	25	12
1652RTUS	1″	20	19
1653RTUS	1¼″	5	30
1654RTUS	1½″	5	46
1655RTUS	2″	5	55
1656RTUS	2½″	1	242
1657RTUS	3″	1	307
1658RTUS	3½ ″	1	390
1659RTUS	4″	1	492

Connectors – Non-insulated – Raintight

UL File No. E-22132

Cat. #	Size	Unit Qty.	Wt. Lbs. Per 100
650RTUS	½″	50	8
651RTUS	¾″	25	12
652RTUS	1″	20	19
653RTUS	1¼″	5	30
654RTUS	1½″	5	46
655RTUS	2″	5	55
656RTUS	2½″	1	242
657RTUS	3″	1	307
658RTUS	3½ ″	1	390
659RTUS	4″	1	492

Couplings – Raintight

UL File No. E-22132

Cat. #	Size	Unit Qty.	Wt. Lbs. Per 100
660RTUS	½″	50	8
661RTUS	¾″	25	13
662RTUS	1″	20	19
663RTUS	1¼″	5	30
664RTUS	1½″	5	46
665RTUS	2″	5	60
666RTUS	2½″	1	360
667RTUS	3″	1	405
668RTUS	3½ ″	1	545
669RTUS	4″	1	635

 Copyright© 2015 Commercial Products Catalog

Thin Wall Conduit Fittings (for EMT Conduit)

Conduit Fittings – Product of the USA

STRAPS – STEEL GALVANIZED PRODUCT OF THE USA

Two Hole

UL File No. E-184283

Cat. #	Size	Unit Qty.	Wt. Lbs. Per 100
497 1US	1/2″	250	2
497 2US	3/4″	150	3
497 3US	1″	100	5
497 4US	1 1/4″	50	8
497 5US	1 1/2″	50	13
497 6US	2″	25	14

CLAMPS – STEEL PRODUCT OF THE USA

Applications:

- To support EMT conduit to mounting surface

UL File No. E-184283

Cat. #	Size	Unit Qty.	Wt. Lbs. Per 100
200US	1/2″	100	5
201US	3/4″	100	6
202US	1″	100	6
203US*	1 1/4″	50	13
204US*	1 1/2″	25	17
205US*	2″	25	20
206US*	2 1/2″	25	64
207US*	3″	25	71
208US*	3 1/2″	25	120
209US*	4″	10	130

*Not UL Listed or cUL Listed.

NAILING STRAPS – STAMPED STEEL PRODUCT OF THE USA

Applications:

- To secure EMT conduit

Standard Material:

- Pre-galvanized stamped steel



Cat. #	Conduit Size	Unit Qty.	Wt. Lbs. Per 100
NSS1US	1/2″	100	2
NSS2US	3/4″	100	2
NSS3US	1″	100	3

Dimensions (in Inches):

Cat. #	A	B	C	Radius
NSS1US	2.100	1.040	0.080	0.350
NSS2US	2.300	1.275	0.080	0.460
NSS3US	2.200	1.500	0.080	0.580



Product of the USA

Conduit Fittings – Product of the USA

THREE-PIECE CONDUIT COUPLINGS – STEEL PRODUCT OF THE USA

Applications:

- To join two lengths of threaded conduit; couples conduit when conduit cannot be turned

Standard Material:

- Heavy duty casting

Standard Finish:

- Zinc plated

Steel

UL File No. E-19189

Cat. #	Size	Unit Qty.	Wt. Lbs. Per 100
190US	1/2″	20	36
191US	3/4″	20	32
192US	1″	5	55
193US	1 1/4″	5	119
194US	1 1/2″	5	140
195US	2″	5	199

CONDUIT LOCKNUTS – STEEL PRODUCT OF THE USA

UL File No. E-19189

Cat. #	Size	Unit Qty.	Wt. Lbs. Per 100
11USA	1/2″	200	1
12USA	3/4″	100	2
13USA	1″	50	4
14USA	1 1/4″	50	7
15USA	1 1/2″	25	8
16USA	2″	25	9

STRAPS – STEEL GALVANIZED PRODUCT OF THE USA

Applications:

- Used to secure rigid conduit or IMC to mounting surface

Two Hole

UL File No. E-184283

Cat. #	Size	Unit Qty.	Wt. Lbs. Per 100
496 3US	1/2″	150	2
496 4US	3/4″	100	3
496 5US	1″	50	7
496 6US	1 1/4″	50	8
496 7US	1 1/2″	50	10
496 8US	2″	25	15
496 9US	2 1/2″	25	19
496 10US	3″	25	23
496 11US	3 1/2″	25	93
496 12US	4″	10	108

CLAMPS – STEEL PRODUCT OF THE USA

Applications:

- To support rigid conduit and IMC to mounting surface

Cat. #	Size	Unit Qty.	Wt. Lbs. Per 100
410US	1/2″	100	5
411US	3/4″	50	6
412US	1″	50	11
413US	1 1/4″	50	13
414US	1 1/2″	25	20
415US	2″	25	22

BEAM CLAMPS/INSULATOR SUPPORTS – STEEL PRODUCT OF THE USA

Cat. #	Base Size	Jaw Opening	Tapped Holes	Unit Qty.	Wt. Lbs. Per 100
529SUS	3/4″	5/8″	1/4″ - 20	300	13

EATON CROUSE-HINDS SERIES

Conduit Fittings – Product of the USA

TYPE CPR COMPRESSION FITTINGS PRODUCT OF THE USA

Applications:

Use Type CPR Product of the USA Compression Fittings for:

- Both IMC and metallic rigid conduit
- New work in poured concrete
- Maintenance, repairs and alterations
- Connections at panels and boxes
- New, altered or damaged stub-ups
- Applicable locations where field threading is impractical or undesirable

Features:

- UL Listed for use with IMC as well as metallic rigid conduit
- Unequaled versatility for the installer
- Unique gland ring design tightens up in fewer turns; provides outstanding pull-out strength; saves time and adds confidence
- Advanced, thoughtful design and premium materials team up for an installation you can be proud of

Certifications and Compliances:

- UL514B Fittings for Conduit and Outlet Boxes

Standard Materials:

- Bodies – steel
- Compression nuts – steel
- Compression rings – zinc plated steel
- Locknuts – zinc plated steel
- Insuliners – glass-reinforced polypropylene

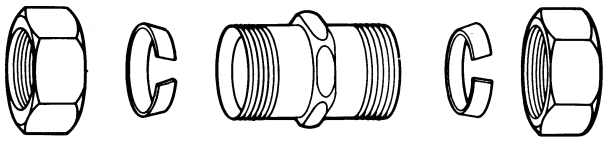

Straight Connectors – Insulated

UL File No. E-19189

Cat. #	Size	Unit Qty.	Wt. Lbs. Per 100
CPR11US	½″	25	13
CPR12US	¾″	20	20
CPR13US	1″	5	36
CPR14US	1¼″	5	48
CPR15US	1½″	5	70
CPR16US	2″	5	100

Straight Connectors – Non-insulated

UL File No. E-19189

Cat. #	Size	Unit Qty.	Wt. Lbs. Per 100
CPR1US	½″	25	13
CPR2US	¾″	20	20
CPR3US	1″	5	36
CPR4US	1¼″	5	48
CPR5US	1½″	5	70
CPR6US	2″	5	100

Couplings

UL File No. E-19189

Cat. #	Size	Unit Qty.	Wt. Lbs. Per 100
CPR21US	½″	20	16
CPR22US	¾″	20	24
CPR23US	1″	5	48
CPR24US	1¼″	5	64
CPR25US	1½″	5	110
CPR26US	2″	3	140

CABLE AND CONDUIT HANGERS – STEEL PRODUCT OF THE USA

Certifications and Compliances:

- UL Listed

With Bolt

UL File No. E-184283

Cat. #	Conduit Size EMT	Conduit Size Rigid	Unit Qty.	Wt. Lbs. Per 100
0BUS	½″	⅜″ and ½″	100	6
1BUS	¾″	¾″	100	6
2BUS	1″	1″	100	8
2 1/2BUS	1¼″	-	100	10
3BUS	1½″	1¼″	100	11
4BUS	-	1½″	100	16
5BUS	2″	2″	50	23
6BUS	2½″	2½″	50	29
7BUS	3″	3″	25	31
8BUS	3½ ″	3½″	10	38
9BUS	4″	4″	10	38