




Atlanta, Georgia

Phone 800-521-7326

Fax 770-745-1333

Conical Plastic Anchor

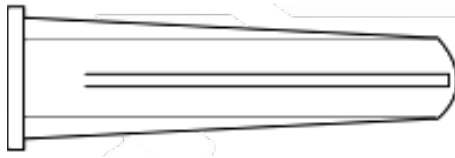

Conical plastic anchors are designed for use with lightweight fixtures. It can be used in concrete, block, and brick. It can also be used in wallboard. Holding values in wallboard tend to be inconsistent. Plastic anchors are injection molded from an engineered plastic and designed to be used in conjunction with a sheet metal screw. Plastic anchors should not be used in overhead applications.

Screw Size	Length Of Anchor	Flange Diameter	Drill Bit Size	Minimum Embedment Depth	Allowable Load Capacity									
					2000 PSI Concrete		4000 PSI Concrete		6000 PSI Concrete		Hollow Block		Brick	
					Tensile (lbs.)	Shear (lbs.)	Tensile (lbs.)	Shear (lbs.)	Tensile (lbs.)	Shear (lbs.)	Tensile (lbs.)	Shear (lbs.)	Tensile (lbs.)	Shear (lbs.)
6-8	3/4	19/64	3/16	3/4	45	55	55	60	55	60	35	45	20	45
8-10	7/8	19/64	3/16	7/8	65	60	85	70	105	70	60	45	30	50
10-12	1"	3/8	1/4	1"	90	70	140	90	160	90	70	55	55	65
14-16	1-1/2	7/16	5/16	1-1/2	210	135	210	145	225	145	170	105	175	100

Peco Fasteners specification sheets are a reference guide to help in the selection of fasteners. Peco has made every effort to ensure the accuracy of the information. However, Peco Fasteners is not responsible for any errors that may be contained within these sheets. Peco Fasteners makes no claim of warranty in the accuracy of this information. Users of this information are solely responsible for protecting themselves against liability. It is solely the responsibility of the purchasers and users of these fasteners to consult with Engineers that are experts in an applicable field. Peco Fasteners is not responsible for any loss, claim, or damage due to these specification sheets.




Atlanta, Georgia

Phone 800-521-7326

Fax 770-745-1333

Conical Plastic Anchor

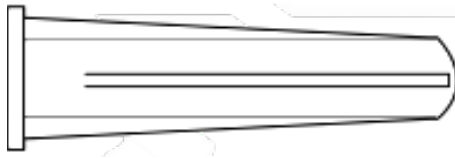

Conical plastic anchors are designed for use with lightweight fixtures. It can be used in concrete, block, and brick. It can also be used in wallboard. Holding values in wallboard tend to be inconsistent. Plastic anchors are injection molded from an engineered plastic and designed to be used in conjunction with a sheet metal screw. Plastic anchors should not be used in overhead applications.

Screw Size	Length Of Anchor	Flange Diameter	Drill Bit Size	Minimum Embedment Depth	Allowable Load Capacity									
					2000 PSI Concrete		4000 PSI Concrete		6000 PSI Concrete		Hollow Block		Brick	
					Tensile (lbs.)	Shear (lbs.)	Tensile (lbs.)	Shear (lbs.)	Tensile (lbs.)	Shear (lbs.)	Tensile (lbs.)	Shear (lbs.)	Tensile (lbs.)	Shear (lbs.)
6-8	3/4	19/64	3/16	3/4	45	55	55	60	55	60	35	45	20	45
8-10	7/8	19/64	3/16	7/8	65	60	85	70	105	70	60	45	30	50
10-12	1"	3/8	1/4	1"	90	70	140	90	160	90	70	55	55	65
14-16	1-1/2	7/16	5/16	1-1/2	210	135	210	145	225	145	170	105	175	100

Peco Fasteners specification sheets are a reference guide to help in the selection of fasteners. Peco has made every effort to ensure the accuracy of the information. However, Peco Fasteners is not responsible for any errors that may be contained within these sheets. Peco Fasteners makes no claim of warranty in the accuracy of this information. Users of this information are solely responsible for protecting themselves against liability. It is solely the responsibility of the purchasers and users of these fasteners to consult with Engineers that are experts in an applicable field. Peco Fasteners is not responsible for any loss, claim, or damage due to these specification sheets.