

Same reliable receptacles,  
now with a subtle new look.

885, 885S

Aesthetically improved yet reliable as ever, these receptacles are part of the radiant® collection – offering a better fit, form and finish. Ideal for residential, multi-dwelling and hospitality applications.

## Features & Benefits

High-impact resistant thermoplastic construction.



Extra-long strap

885LA

- Part of the radiant® collection.
- Quickloop wire looping aid.
- Long-term blade retention.
- Longer tri-drive screws for easier 12 AWG looping.
- Extra-large circuit break-off tabs.
- Side-access push wire release.
- Ultrasonic welding of face to back body.
- Side wire accepts #12 – #14 AWG solid.
- Push wire accepts #14 AWG solid only.
- Low profile face.
- Self-grounding models provide automatic ground clip.

## 3rd Party Compliance



UL Listed, File Number E140596, Standard UL498, CSA/CUL approved. cULus listed. Standard CSA C22.2 No. 42. Conform to NEMA WD-1 and WD-6.

## Technical Information

### Performance

#### Electrical

Dielectric Withstand Voltage	2000V Min.
Maximum Working Voltage	125V
Current Interrupting	15A
Temperature Rise	30° Max.

#### Mechanical


Terminal Identification	Terminal Identification in accordance with UL 498 (Brass, White, Green)
Terminal Accommodation	#12 - #14 AWG
Product Identification	Ratings are a permanent part of the device

#### Environmental

Flammability	Complies with UL498
--------------	---------------------

### Materials

Face	Thermoplastic (PVC)
Back Body	Thermoplastic
Line Contacts	.031 Brass
Mounting Strap	.040 Zinc-Plated Steel
Ground Contacts	Brass
Terminal Screws	#8 Tri-Drive Plated Steel
Ground Screw	#8 Hex Tri-Drive Plated Steel Green Chromate
Auto-Ground Clip	Plated Steel
Mounting Screws	#6 Tri-Drive Steel

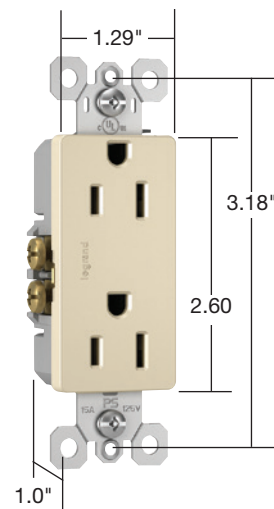




**885LA**

## Warranty

1 Year

## Ordering Information

### radiant® Receptacles

Catalog Number	Rating		Color	NEMA Config. No.	3rd Party Compliance		
	A	VAC			 UL498	 C22.2 No. 42	 cULus
885I	15	125	Ivory	5-15R	•	•	•
885W	15	125	White	5-15R	•	•	•
885	15	125	Brown	5-15R	•	•	•
885GRY	15	125	Gray	5-15R	•	•	•
885BK	15	125	Black	5-15R	•	•	•
885LA	15	125	Light Almond	5-15R	•	•	•

### Self-Grounding radiant® Receptacles

885SI	15	125	Ivory	5-15R	•	•	•
885SW	15	125	White	5-15R	•	•	•
885SLA	15	125	Light Almond	5-15R	•	•	•
885SBK	15	125	Black	5-15R	•	•	•

### 2 Pole, 3 Wire



NEMA  
5-15R

---

## Vertical Markets


- Residential
- Multiple Dwelling
- Hospitality/Lodging

---

## Also available in the radiant® collection...

- GFCI Receptacles
- Home Automation Controls
- Paddle Switches
- Lighting & Fan Controls
- Timers
- Sensors
- Combination Devices
- USB Charging Devices
- Night Lights
- Screwless Wall Plates

---

 The paper used to print this document is an environmentally responsible paper with 10% post consumer waste, with FSC and SFI Chain of Custody certifications, Lacey Act compliant. 100% of the electricity used to manufacture Flo sheets is generated with Green-e certified renewable energy.


All brand and product names referenced in this document are registered trademarks or trademarks of their respective holders.



**Legrand, North America**  
60 Woodlawn Street  
West Hartford, CT 06110  
1.877.BY.LEGRAND (295.3472)  
[www.legrand.us](http://www.legrand.us)  
570 Applewood Crescent  
Vaughan, Ontario L4K 4B4  
905.738.9195  
[www.legrand.ca](http://www.legrand.ca)

FOLLOW US



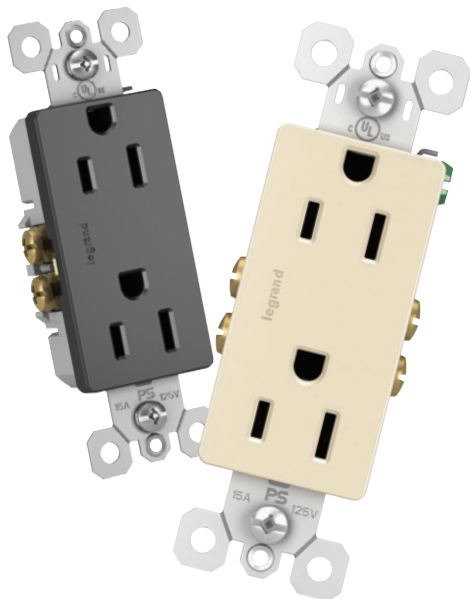

Same reliable receptacles,  
now with a subtle new look.

885, 885S

Aesthetically improved yet reliable as ever, these receptacles are part of the radiant® collection – offering a better fit, form and finish. Ideal for residential, multi-dwelling and hospitality applications.

## Features & Benefits

High-impact resistant thermoplastic construction.



Extra-long strap

885LA

- Part of the radiant® collection.
- Quickloop wire looping aid.
- Long-term blade retention.
- Longer tri-drive screws for easier 12 AWG looping.
- Extra-large circuit break-off tabs.
- Side-access push wire release.
- Ultrasonic welding of face to back body.
- Side wire accepts #12 – #14 AWG solid.
- Push wire accepts #14 AWG solid only.
- Low profile face.
- Self-grounding models provide automatic ground clip.

## 3rd Party Compliance



UL Listed, File Number E140596, Standard UL498, CSA/CUL approved. cULus listed. Standard CSA C22.2 No. 42. Conform to NEMA WD-1 and WD-6.

## Technical Information

### Performance

#### Electrical

Dielectric Withstand Voltage	2000V Min.
Maximum Working Voltage	125V
Current Interrupting	15A
Temperature Rise	30° Max.

#### Mechanical


Terminal Identification	Terminal Identification in accordance with UL 498 (Brass, White, Green)
Terminal Accommodation	#12 - #14 AWG
Product Identification	Ratings are a permanent part of the device

#### Environmental

Flammability	Complies with UL498
--------------	---------------------

### Materials

Face	Thermoplastic (PVC)
Back Body	Thermoplastic
Line Contacts	.031 Brass
Mounting Strap	.040 Zinc-Plated Steel
Ground Contacts	Brass
Terminal Screws	#8 Tri-Drive Plated Steel
Ground Screw	#8 Hex Tri-Drive Plated Steel Green Chromate
Auto-Ground Clip	Plated Steel
Mounting Screws	#6 Tri-Drive Steel

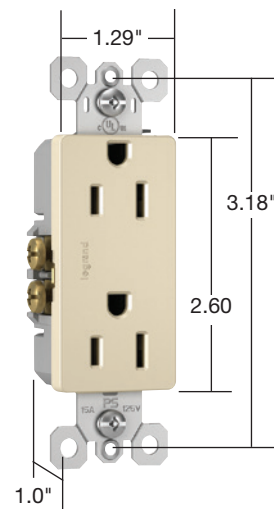




**885LA**

### Warranty

1 Year

## Ordering Information

### radiant® Receptacles

Catalog Number	Rating		Color	NEMA Config. No.	3rd Party Compliance		
	A	VAC			 UL498	 C22.2 No. 42	 cULus
885I	15	125	Ivory	5-15R	•	•	•
885W	15	125	White	5-15R	•	•	•
885	15	125	Brown	5-15R	•	•	•
885GRY	15	125	Gray	5-15R	•	•	•
885BK	15	125	Black	5-15R	•	•	•
885LA	15	125	Light Almond	5-15R	•	•	•

### Self-Grounding radiant® Receptacles

885SI	15	125	Ivory	5-15R	•	•	•
885SW	15	125	White	5-15R	•	•	•
885SLA	15	125	Light Almond	5-15R	•	•	•
885SBK	15	125	Black	5-15R	•	•	•

### 2 Pole, 3 Wire



NEMA  
5-15R

---

## Vertical Markets


- Residential
- Multiple Dwelling
- Hospitality/Lodging

---

## Also available in the radiant® collection...

- GFCI Receptacles
- Home Automation Controls
- Paddle Switches
- Lighting & Fan Controls
- Timers
- Sensors
- Combination Devices
- USB Charging Devices
- Night Lights
- Screwless Wall Plates

---

 The paper used to print this document is an environmentally responsible paper with 10% post consumer waste, with FSC and SFI Chain of Custody certifications, Lacey Act compliant. 100% of the electricity used to manufacture Flo sheets is generated with Green-e certified renewable energy.

All brand and product names referenced in this document are registered trademarks or trademarks of their respective holders.



**Legrand, North America**  
60 Woodlawn Street  
West Hartford, CT 06110  
1.877.BY.LEGRAND (295.3472)  
[www.legrand.us](http://www.legrand.us)  
570 Applewood Crescent  
Vaughan, Ontario L4K 4B4  
905.738.9195  
[www.legrand.ca](http://www.legrand.ca)

FOLLOW US

