


# Specifications



Photo is representative

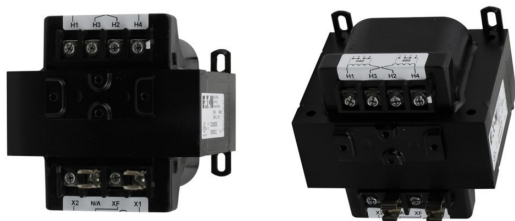

## Eaton C0300E5E

Eaton Type MTE industrial control transformer, pv: 200/220/440v, 208/230/460v, 240/480v, taps: none, sv: 23/110v, 24/115v, 25/120v, 55°C, 300 va , cu magnet wire

### General specifications

<b>PRODUCT NAME</b>	Eaton Type MTE industrial control transformer
<b>CATALOG NUMBER</b>	C0300E5E
<b>UPC</b>	786680420429
<b>PRODUCT LENGTH/DEPTH</b>	5.118 in
<b>PRODUCT HEIGHT</b>	4.764 in
<b>PRODUCT WIDTH</b>	5.236 in
<b>PRODUCT WEIGHT</b>	15.5 lb
<b>WARRANTY</b>	Eaton Selling Policy 25-000, one (1) year from the date of installation of the Product or eighteen (18) months from the date of shipment of the Product, whichever occurs first.
<b>COMPLIANCES</b>	RoHS Compliant
<b>CERTIFICATIONS</b>	CSA Certified UL Listed cUL Certified
<b>CATALOG NOTES</b>	Epoxy encapsulated, Laminations of high quality silicon steel to minimize core losses and optimize performance, 50/60Hz operation, 130°C insulation system standard, Molded-in terminals for maximum durability

## Physical Attributes

**COIL MATERIAL** Copper windings

**DESIGN** MTE

**TAP SIZE** None

## Performance Ratings

**PRIMARY VOLTAGE** 200/220/440 V,  
208/230/460 V, 240/480 V

**TEMPERATURE RATING** 55°C

**VOLT AMPERE RATING** 300 VA

**SECONDARY VOLTAGE** 23/110 V, 24/115 V, 25/120 V

## Resources

**SPECIFICATIONS AND DATASHEETS** [Eaton Specification Sheet - C0300E5E](#)

**PROJECT NAME:**

**PROJECT NUMBER:**

**PREPARED BY:**

**DATE:**



### Eaton Corporation plc

Eaton House  
30 Pembroke Road  
Dublin 4, Ireland  
Eaton.com

© 2025 Eaton. All Rights Reserved.


Follow us on social media to get the latest product and support information.



# Specifications



Photo is representative

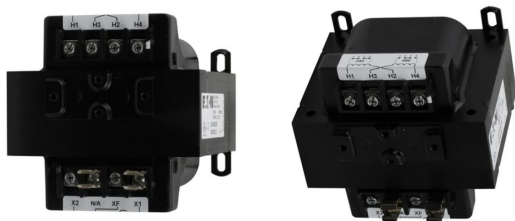

## Eaton C0300E5E

Eaton Type MTE industrial control transformer, pv: 200/220/440v, 208/230/460v, 240/480v, taps: none, sv: 23/110v, 24/115v, 25/120v, 55°C, 300 va , cu magnet wire

### General specifications

<b>PRODUCT NAME</b>	Eaton Type MTE industrial control transformer
<b>CATALOG NUMBER</b>	C0300E5E
<b>UPC</b>	786680420429
<b>PRODUCT LENGTH/DEPTH</b>	5.118 in
<b>PRODUCT HEIGHT</b>	4.764 in
<b>PRODUCT WIDTH</b>	5.236 in
<b>PRODUCT WEIGHT</b>	15.5 lb
<b>WARRANTY</b>	Eaton Selling Policy 25-000, one (1) year from the date of installation of the Product or eighteen (18) months from the date of shipment of the Product, whichever occurs first.
<b>COMPLIANCES</b>	RoHS Compliant
<b>CERTIFICATIONS</b>	CSA Certified UL Listed cUL Certified
<b>CATALOG NOTES</b>	Epoxy encapsulated, Laminations of high quality silicon steel to minimize core losses and optimize performance, 50/60Hz operation, 130°C insulation system standard, Molded-in terminals for maximum durability

## Physical Attributes

**COIL MATERIAL** Copper windings

**DESIGN** MTE

**TAP SIZE** None

## Performance Ratings

**PRIMARY VOLTAGE** 200/220/440 V,  
208/230/460 V, 240/480 V

**TEMPERATURE RATING** 55°C

**VOLT AMPERE RATING** 300 VA

**SECONDARY VOLTAGE** 23/110 V, 24/115 V, 25/120 V

## Resources

**SPECIFICATIONS AND DATASHEETS** [Eaton Specification Sheet - C0300E5E](#)

**PROJECT NAME:**

**PROJECT NUMBER:**

**PREPARED BY:**

**DATE:**



### Eaton Corporation plc

Eaton House  
30 Pembroke Road  
Dublin 4, Ireland  
Eaton.com

© 2025 Eaton. All Rights Reserved.

Follow us on social media to get the latest product and support information.

