

Skylark Contour Quiet Fan Speed Control

Captive knob slide control with an easy to use rocker switch.

Product Family Features

- On/off rocker switch with a captive slider for a standard designer wallplate opening
- Switch returns load to previous level
- Uses standard single-pole or 3-way wiring for easy installation in any home
- 100% factory tested
- Coordinating Claro and Stainless Steel wallplates available separately
- Available in all Claro gloss colors
- Skylark Contour Family:
 - 💡 Incandescent/Halogen
 - 🔌 Electronic Low Voltage (ELV)
 - 🔌 Magnetic Low Voltage (MLV)
 - 🔌 Quiet Fan Speed
 - 💡 Compact Fluorescent (CFL)/LED


Colors and Finishes

Gloss Finishes

Add color suffix to model #

Example: CTFSQ-F-WH

WH	White
IV	Ivory
AL	Almond
LA	Light Almond
GR	Gray
BR	Brown
BL	Black

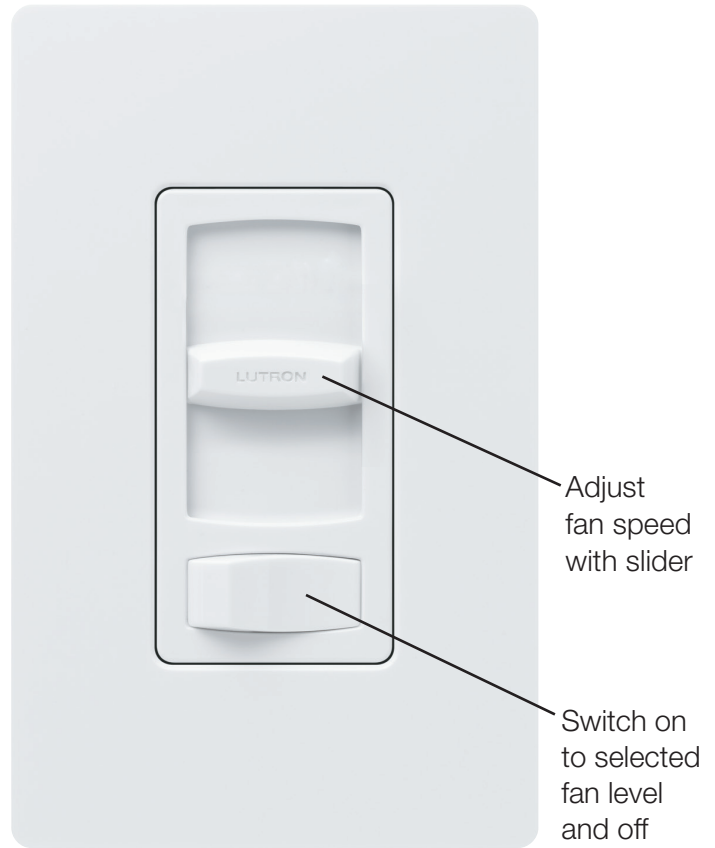

Wallplate sold separately

Product Specific Features

- Quiet 3-speed control for use with one ceiling paddle fan

Model Number

CTFSQ-F-XX^{1,2} Single pole/3-way³, 3-speed 1.5 A

CTFSQ-FH-XX-C⁴ Single pole/3-way³, 3-speed 1.5A

Notes:

¹ XX Gloss color codes, see section "Colors and Finishes" at left

² For clamshell packaging, add an "H" after the F.

³ For 3-way and 4-way switching, use Claro switches or other mechanical switches.

⁴ Clamshell packaged product for Canada.

Job Name:	Model Numbers:
Job Number:	

Specifications

Regulatory Approvals

- UL Listed to US and Canadian safety standards
UL1917 / CSA C22.2 156-M1987
- NOM Certified

Power and Ratings

- 120 V~ 60 Hz
- 1.5 A Ceiling Paddle Fan

Environment

- For indoor use only
- Operating temperatures 32 °F (0 °C) to 104 °F (40 °C)


Performance

- Power-failure memory
- Captive linear slider
- Electrostatic discharge tested
- Precise color matching
- Mechanical air-gap switch to disconnect load power

Fan Speed Control Capacity Chart

Fan Rating	No sides removed	1 side removed	2 sides removed
1.5 A	1.5 A max	1.5 A max	1.5 A max

Dimensions

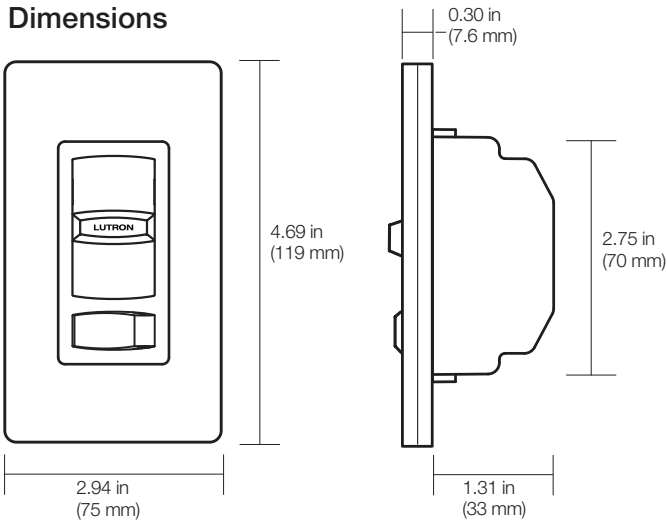

Note: Requires a U.S. wallbox. 2 ½ in (64 mm) deep minimum.


Warranty

- 1 Year Limited Warranty
For additional Warranty information, please visit www.lutron.com/TechnicalDocumentLibrary/369-119_Wallbox_Warranty.pdf

Job Name:	Model Numbers:
Job Number:	

Wiring Diagrams


Single-Pole Wiring

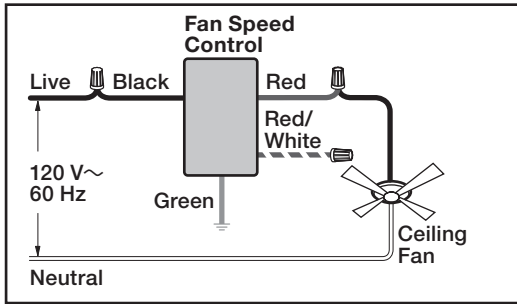


Note: Skylark Contour Quiet Fan Speed Controls are designed to control ceiling fan motors only.

Do not use to control ceiling fan lighting or lighting fixtures.

3-Way Wiring

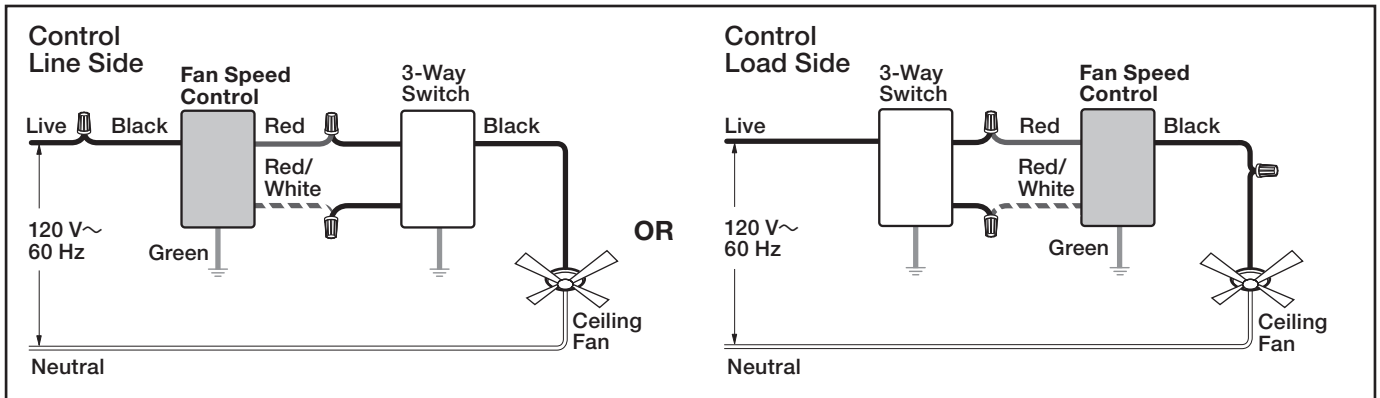

4-Way Wiring

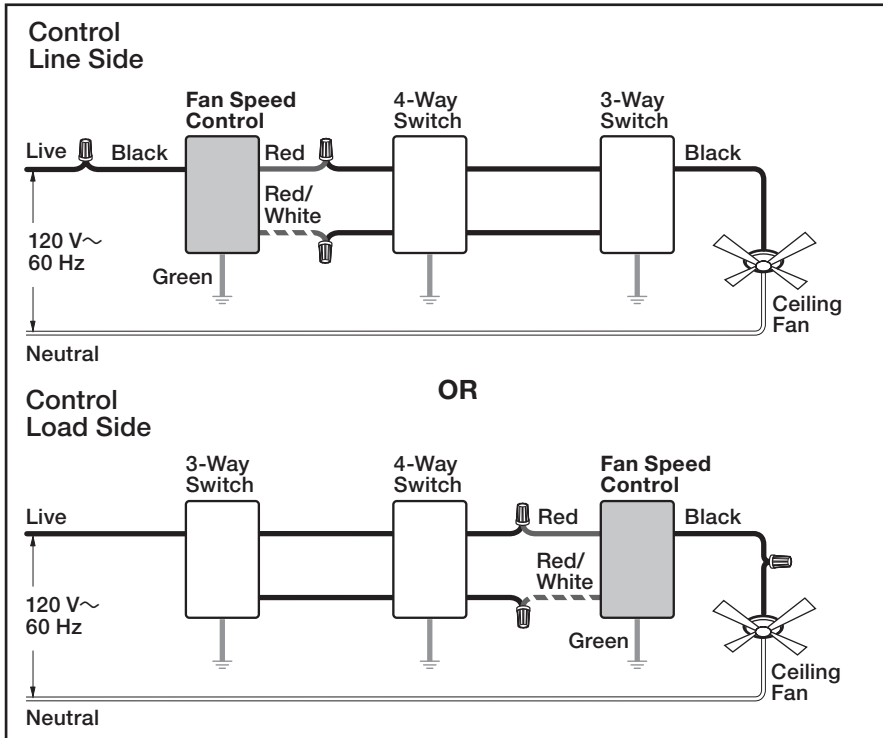

Lutron, Lutron, Skylark, Skylark Contour and Claro are trademarks of Lutron Electronics Co., Inc., registered in the U.S. and other countries.

Job Name:	Model Numbers:
Job Number:	

Skylark Contour Quiet Fan Speed Control

Captive knob slide control with an easy to use rocker switch.

Product Family Features

- On/off rocker switch with a captive slider for a standard designer wallplate opening
- Switch returns load to previous level
- Uses standard single-pole or 3-way wiring for easy installation in any home
- 100% factory tested
- Coordinating Claro and Stainless Steel wallplates available separately
- Available in all Claro gloss colors
- Skylark Contour Family:
 - 💡 Incandescent/Halogen
 - 🔌 Electronic Low Voltage (ELV)
 - 🔌 Magnetic Low Voltage (MLV)
 - 🔌 Quiet Fan Speed
 - 💡 Compact Fluorescent (CFL)/LED


Colors and Finishes

Gloss Finishes

Add color suffix to model #

Example: CTFSQ-F-WH

WH	White
IV	Ivory
AL	Almond
LA	Light Almond
GR	Gray
BR	Brown
BL	Black

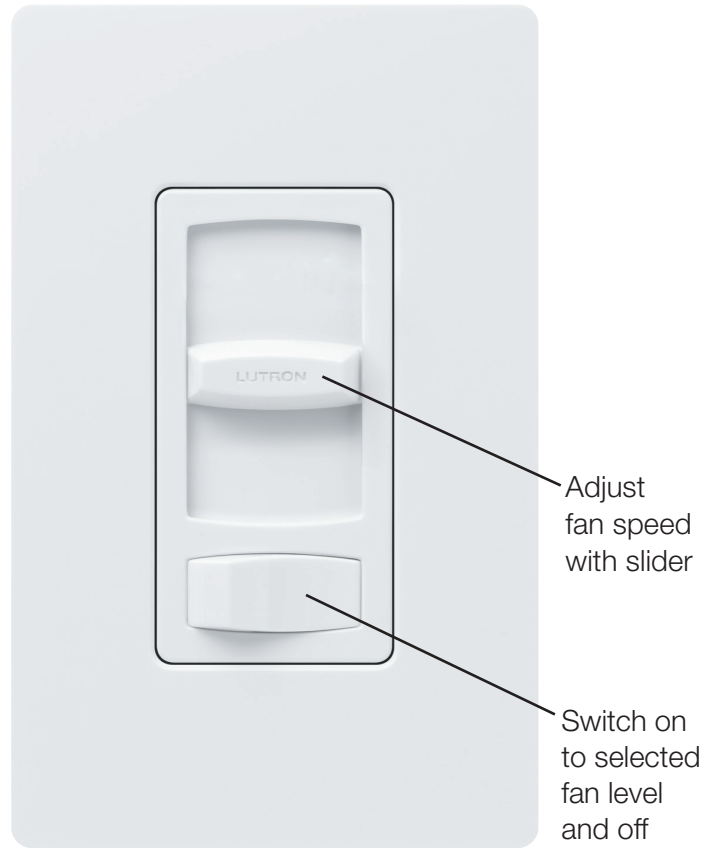

Wallplate sold separately

Product Specific Features

- Quiet 3-speed control for use with one ceiling paddle fan

Model Number

CTFSQ-F-XX^{1,2} Single pole/3-way³, 3-speed 1.5 A

CTFSQ-FH-XX-C⁴ Single pole/3-way³, 3-speed 1.5A

Notes:

¹ XX Gloss color codes, see section "Colors and Finishes" at left

² For clamshell packaging, add an "H" after the F.

³ For 3-way and 4-way switching, use Claro switches or other mechanical switches.

⁴ Clamshell packaged product for Canada.

Job Name:	Model Numbers:
Job Number:	

Specifications

Regulatory Approvals

- UL Listed to US and Canadian safety standards
UL1917 / CSA C22.2 156-M1987
- NOM Certified

Power and Ratings

- 120 V~ 60 Hz
- 1.5 A Ceiling Paddle Fan

Environment

- For indoor use only
- Operating temperatures 32 °F (0 °C) to 104 °F (40 °C)


Performance

- Power-failure memory
- Captive linear slider
- Electrostatic discharge tested
- Precise color matching
- Mechanical air-gap switch to disconnect load power

Fan Speed Control Capacity Chart

Fan Rating	No sides removed	1 side removed	2 sides removed
1.5 A	1.5 A max	1.5 A max	1.5 A max

Dimensions

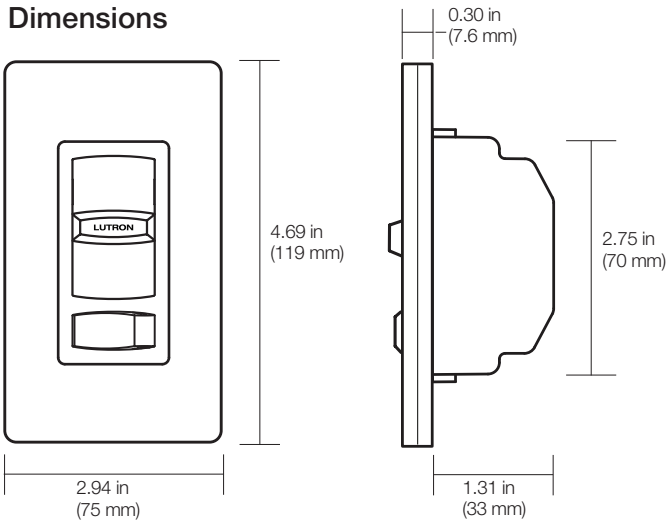

Note: Requires a U.S. wallbox. 2 ½ in (64 mm) deep minimum.


Warranty

- 1 Year Limited Warranty
For additional Warranty information, please visit www.lutron.com/TechnicalDocumentLibrary/369-119_Wallbox_Warranty.pdf

Job Name:	Model Numbers:
Job Number:	

Wiring Diagrams


Single-Pole Wiring

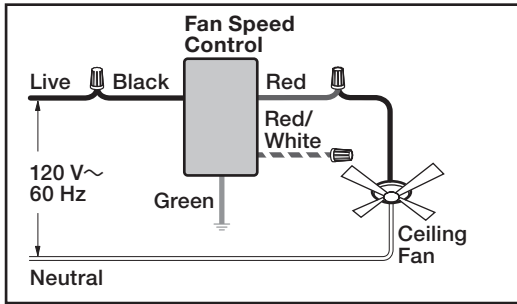


Note: Skylark Contour Quiet Fan Speed Controls are designed to control ceiling fan motors only.

Do not use to control ceiling fan lighting or lighting fixtures.

3-Way Wiring

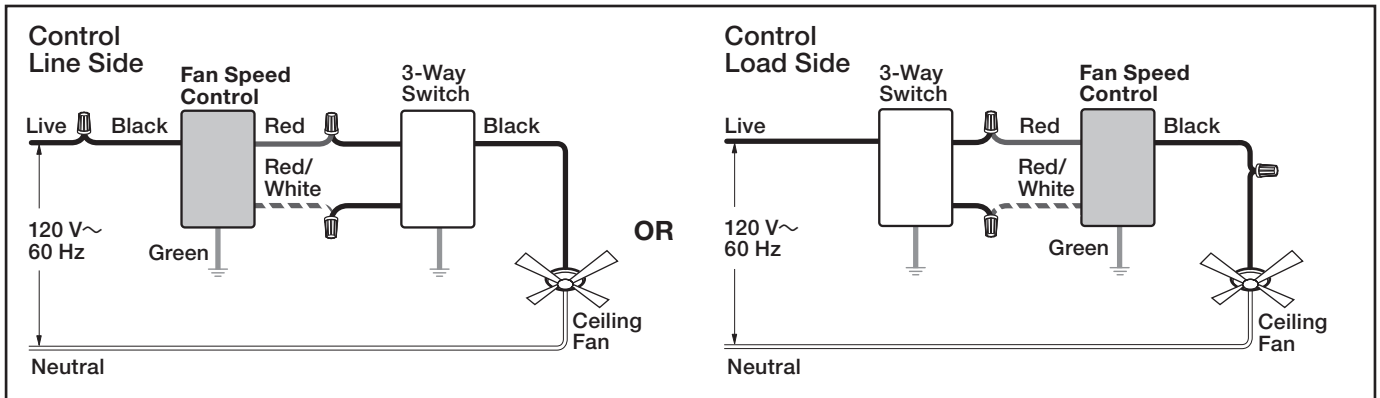

4-Way Wiring

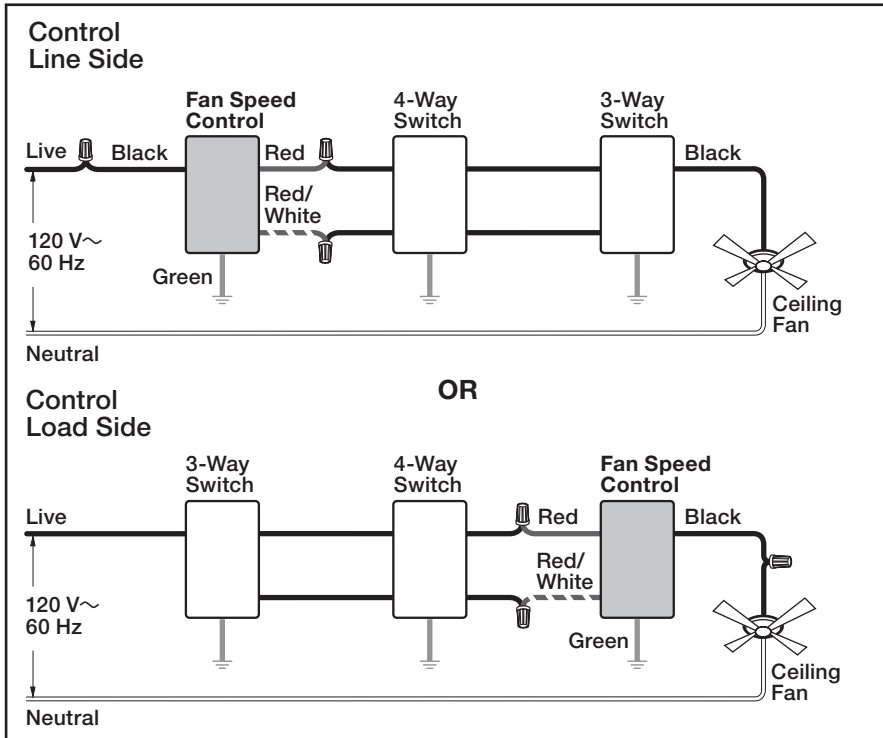

Lutron, Lutron, Skylark, Skylark Contour and Claro are trademarks of Lutron Electronics Co., Inc., registered in the U.S. and other countries.

Job Name:	Model Numbers:
Job Number:	