

LED Emergency Light

FEATURES

- Emergency unit for commercial applications
- Includes optional Self-Test/Self-Diagnostic models
- UV stable thermoplastic white or black housing available
- Quick installation with fully adjustable lamp-heads
- LED Lamps with a life-cycle of more than 10 years
- Dual-voltage 120 or 277V AC input
- Remote capacity or extended runtime option
- Long-life Nickel Cadmium battery with fully automatic charger
- UL 924 Damp Location Listed



EMERGENCY LIGHTING

ORDERING INFORMATION

CATALOG NUMBER	DESCRIPTION
CU2	White Thermoplastic, Dual-Head LED Emergency Light , 120/277 Input, Damp Location Listed, 3 VDC, 1 Watt
CU2B	Black Thermoplastic, Dual-Head LED Emergency Light, 120/277 Input, Damp Location Listed, 3 VDC, 1 Watt
CU2RC	White Thermoplastic, Dual-Head LED Emergency Light, 120/277 Input, Damp Location Listed, Remote Capacity, 3 VDC, 1 Watt
CU2RCB	Black Thermoplastic, Dual-Head LED Emergency Light, 120/277 Input, Damp Location Listed, Remote Capacity, 3 VDC, 1 Watt
CU2SD	White Thermoplastic, Dual-Head LED Emergency Light , 120/277VAC, Damp Listed, 3 VDC, 1 Watt, Self-Test/Self-Diagnostics
CU2RCS	White Thermoplastic, Dual-Head LED Emergency Light, 120/277VAC, Damp Listed, Remote Capacity, 3VDC, 1Watt, Self-Test/Self-Diagnostics

Note: Remote Capacity Unit will only power the Compass Indoor and Outdoor Remote(CIR and COR Series)

MATCHING REMOTE FIXTURES

MODEL	DESCRIPTION
CIR	LED Indoor Remote Heads
COR	LED Outdoor Remote Heads



CU2B

ACCESSORIES

MODEL	DESCRIPTION
WGLZ	Wireguard- 6.25" H X 14" W X 4" D


ELECTRONICS

- 90 minute emergency operation
- Test switch and LED AC-on indicator light

SELF-DIAGNOSTIC FEATURES

- Fault identification for battery, charger, LED integral lamps and remotes
- Self-Testing monthly and annual for 90 minutes
- Manual testing for 30 second, 15 minute and 90 minutes

Single Carton Weight: 1 lbs.
Master Carton Quantity: 12 each

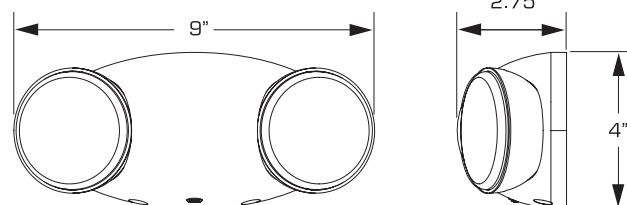

LED Emergency Light

FEATURES

- Emergency unit for commercial applications
- Includes optional Self-Test/Self-Diagnostic models
- UV stable thermoplastic white or black housing available
- Quick installation with fully adjustable lamp-heads
- LED Lamps with a life-cycle of more than 10 years
- Dual-voltage 120 or 277V AC input
- Remote capacity or extended runtime option
- Long-life Nickel Cadmium battery with fully automatic charger
- UL 924 Damp Location Listed



EMERGENCY LIGHTING

ORDERING INFORMATION

CATALOG NUMBER	DESCRIPTION
CU2	White Thermoplastic, Dual-Head LED Emergency Light , 120/277 Input, Damp Location Listed, 3 VDC, 1 Watt
CU2B	Black Thermoplastic, Dual-Head LED Emergency Light, 120/277 Input, Damp Location Listed, 3 VDC, 1 Watt
CU2RC	White Thermoplastic, Dual-Head LED Emergency Light, 120/277 Input, Damp Location Listed, Remote Capacity, 3 VDC, 1 Watt
CU2RCB	Black Thermoplastic, Dual-Head LED Emergency Light, 120/277 Input, Damp Location Listed, Remote Capacity, 3 VDC, 1 Watt
CU2SD	White Thermoplastic, Dual-Head LED Emergency Light , 120/277VAC, Damp Listed, 3 VDC, 1 Watt, Self-Test/Self-Diagnostics
CU2RCS	White Thermoplastic, Dual-Head LED Emergency Light, 120/277VAC, Damp Listed, Remote Capacity, 3VDC, 1Watt, Self-Test/Self-Diagnostics

Note: Remote Capacity Unit will only power the Compass Indoor and Outdoor Remote(CIR and COR Series)

MATCHING REMOTE FIXTURES

MODEL	DESCRIPTION
CIR	LED Indoor Remote Heads
COR	LED Outdoor Remote Heads



CU2B

ACCESSORIES

MODEL	DESCRIPTION
WGLZ	Wireguard- 6.25" H X 14" W X 4" D

ELECTRONICS

- 90 minute emergency operation
- Test switch and LED AC-on indicator light

SELF-DIAGNOSTIC FEATURES

- Fault identification for battery, charger, LED integral lamps and remotes
- Self-Testing monthly and annual for 90 minutes
- Manual testing for 30 second, 15 minute and 90 minutes

Single Carton Weight: 1 lbs.
Master Carton Quantity: 12 each

