


Conduit bodies and fittings

For use with Schedule 40 and 80 conduit

HOLFORM™ non-metallic concrete sleeve forms are the easy way to form holes in concrete. They install in seconds with nails, screws or staples and are easily removed. Concrete will not adhere to them. Sleeves are adjustable to any slab thickness.



LR31146
Except
where
noted
by †




E23018
Except
where
noted
by ▶

HOLFORM™ Concrete sleeves

Cat. No.	Min. O.D. A (in.)	B. (in.)	Std. Ctn.	Std. Wt. (lbs.)
▶ E92CSH	1½	1¾	20	3
▶ E92CSJ	2	2 ¹³ / ₃₂	25	6
▶ E92CSL	3	3 ¹³ / ₃₂	25	8
▶ E92CSN	4	4 ¹³ / ₃₂	18	8
▶ E92CSP	5	5 ¹³ / ₃₂	15	8
▶ E92CSR	6	6 ¹³ / ₃₂	12	8

Four knock-out type socket openings, 90° spacing. Available with 1/2" or 3/4" socket outlets. Includes cover and gasket.

Note: Not fixture rated.

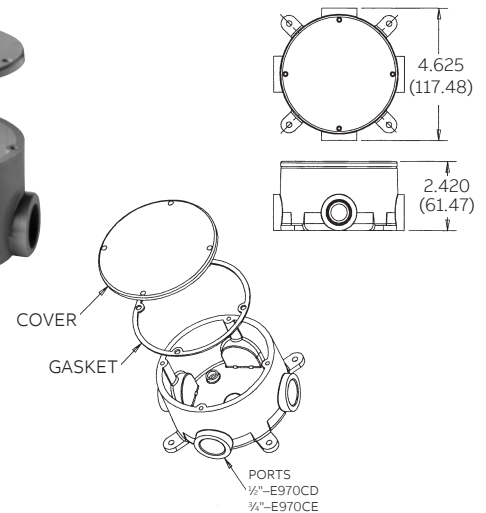


Conduit bodies Type X with cover

Cat. No.	Size (in.)	Vol. (cu.in.)	Std. Ctn.
▶ E970CD	1/2	15.16	15
▶ E970CE	3/4	15.16	15

Supplied with four stainless steel cover screws. Diameter 4¹/₈", thickness 1/4".
Not designed for use with wiring devices or light fixtures.

Feature unthreaded hubs and textured lids with foam-in-place gaskets.



LR31146



E11461
Except
where
noted
by ▶

Conduit bodies - Type LB


Cat. No.	Size (in.)	Std. Ctn.	Dimensions (in.)							Vol. Cu (in.)
			Typical max.		Typical		Max. H	Max. Q	Max. W	
			C	L1	L2	L3				
E986D	1⁄2	25	1¹⁄₁₆	4⁵⁄₁₆	3⁷⁄₃₂	3¹⁄₁₆	1⁵⁄₁₆	1¹¹⁄₃₂	1½	4.0
E986E	¾	15	²⁹⁄₃₂	6⁹⁄₃₂	5⁹⁄₃₂	4²⁵⁄₃₂	1²⁵⁄₃₂	1¾	2¹⁄₃₂	12.0
E986F	1	10	²⁹⁄₃₂	6⁹⁄₃₂	5⁹⁄₃₂	4²⁵⁄₃₂	1²⁵⁄₃₂	1¾	2¹⁄₃₂	12.0
E986G	1¼	10	1³⁄₃₂	7³¹⁄₃₂	6¹³⁄₃₂	6	2⁵⁄₁₆	2½	2¾	32.0
E986H	1½	10	1³⁄₃₂	7³¹⁄₃₂	6¹³⁄₃₂	6	2⁵⁄₁₆	2½	2¾	32.0
E986J	2	10	1⁵⁄₃₂	9³¹⁄₃₂	8¹³⁄₃₂	7¼	2⁹⁄₁₆	3⁵⁄₃₂	3¹⁵⁄₃₂	63.0
► E986K	2½	4	1⁵⁄₈	14⁷⁄₈	13¼	11³¹⁄₃₂	3¾	4¹¹⁄₃₂	4⁵⁄₈	210
► E986L	3	4	1⁵⁄₈	14⁷⁄₈	13¼	11³¹⁄₃₂	3¾	4¹¹⁄₃₂	4⁵⁄₈	210
► E986M	3½	4	1²⁵⁄₃₂	17²³⁄₃₂	15⁷⁄₈	14¹⁷⁄₆₄	4⁷⁄₁₆	5¹¹⁄₃₂	5²¹⁄₃₂	390
► E986N	4	4	1²⁵⁄₃₂	17²³⁄₃₂	15⁷⁄₈	14¹⁷⁄₆₄	4⁷⁄₁₆	5¹¹⁄₃₂	5²¹⁄₃₂	390

Note: Covers are not sold as separate item.

Conduit bodies and fittings

For use with Schedule 40 and 80 conduit

HOLFORM™ non-metallic concrete sleeve forms are the easy way to form holes in concrete. They install in seconds with nails, screws or staples and are easily removed. Concrete will not adhere to them. Sleeves are adjustable to any slab thickness.



LR31146
Except
where
noted
by †




E23018
Except
where
noted
by ▶

HOLFORM™ Concrete sleeves

Cat. No.	Min. O.D. A (in.)	B. (in.)	Std. Ctn.	Std. Wt. (lbs.)
▶ E92CSH	1½	1¾	20	3
▶ E92CSJ	2	2 ¹³ / ₃₂	25	6
▶ E92CSL	3	3 ¹³ / ₃₂	25	8
▶ E92CSN	4	4 ¹³ / ₃₂	18	8
▶ E92CSP	5	5 ¹³ / ₃₂	15	8
▶ E92CSR	6	6 ¹³ / ₃₂	12	8

Four knock-out type socket openings, 90° spacing. Available with 1/2" or 3/4" socket outlets. Includes cover and gasket.

Note: Not fixture rated.

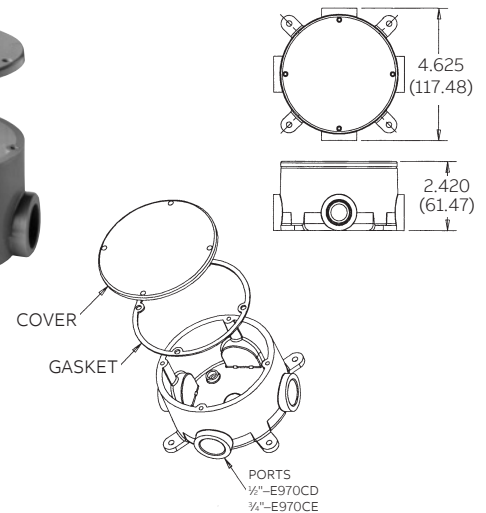


Conduit bodies Type X with cover

Cat. No.	Size (in.)	Vol. (cu.in.)	Std. Ctn.
▶ E970CD	1/2	15.16	15
E970CE	3/4	15.16	15

Supplied with four stainless steel cover screws. Diameter 4¹/₈", thickness 1/4".
Not designed for use with wiring devices or light fixtures.

Feature unthreaded hubs and textured lids with foam-in-place gaskets.



LR31146



E11461
Except
where
noted
by ▶

Conduit bodies - Type LB

Cat. No.	Size (in.)	Std. Ctn.	Dimensions (in.)							Vol. Cu (in.)
			Typical max.		Typical		Max. H	Max. Q	Max. W	
			C	L1	L2	L3				
E986D	1⁄2	25	1¹⁄₁₆	4⁵⁄₁₆	3⁷⁄₃₂	3¹⁄₁₆	1⁵⁄₁₆	1¹¹⁄₃₂	1½	4.0
E986E	¾	15	²⁹⁄₃₂	6⁹⁄₃₂	5⁹⁄₃₂	4²⁵⁄₃₂	1²⁵⁄₃₂	1¾	2¹⁄₃₂	12.0
E986F	1	10	²⁹⁄₃₂	6⁹⁄₃₂	5⁹⁄₃₂	4²⁵⁄₃₂	1²⁵⁄₃₂	1¾	2¹⁄₃₂	12.0
E986G	1¼	10	1³⁄₃₂	7³¹⁄₃₂	6¹³⁄₃₂	6	2⁵⁄₁₆	2½	2¾	32.0
E986H	1½	10	1³⁄₃₂	7³¹⁄₃₂	6¹³⁄₃₂	6	2⁵⁄₁₆	2½	2¾	32.0
E986J	2	10	1⁵⁄₃₂	9³¹⁄₃₂	8¹³⁄₃₂	7¼	2⁹⁄₁₆	3⁵⁄₃₂	3¹⁵⁄₃₂	63.0
► E986K	2½	4	1⁵⁄₈	14⁷⁄₈	13¼	11³¹⁄₃₂	3¾	4¹¹⁄₃₂	4⁵⁄₈	210
► E986L	3	4	1⁵⁄₈	14⁷⁄₈	13¼	11³¹⁄₃₂	3¾	4¹¹⁄₃₂	4⁵⁄₈	210
► E986M	3½	4	1²⁵⁄₃₂	17²³⁄₃₂	15⁷⁄₈	14¹⁷⁄₆₄	4⁷⁄₁₆	5¹¹⁄₃₂	5²¹⁄₃₂	390
► E986N	4	4	1²⁵⁄₃₂	17²³⁄₃₂	15⁷⁄₈	14¹⁷⁄₆₄	4⁷⁄₁₆	5¹¹⁄₃₂	5²¹⁄₃₂	390

Note: Covers are not sold as separate item.