





















GROUNDING BUSBAR - ELECTRICAL BUSBAR













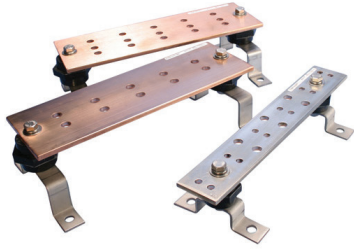


FEATURED HIGHLIGHTS

- Provides a convenient, single-point grounding and bonding location
- Conductors are welded to the bar using a Cadweld exothermic connection or are mechanically fastened by using lugs
- Custom bars can be designed and manufactured to customer specifications

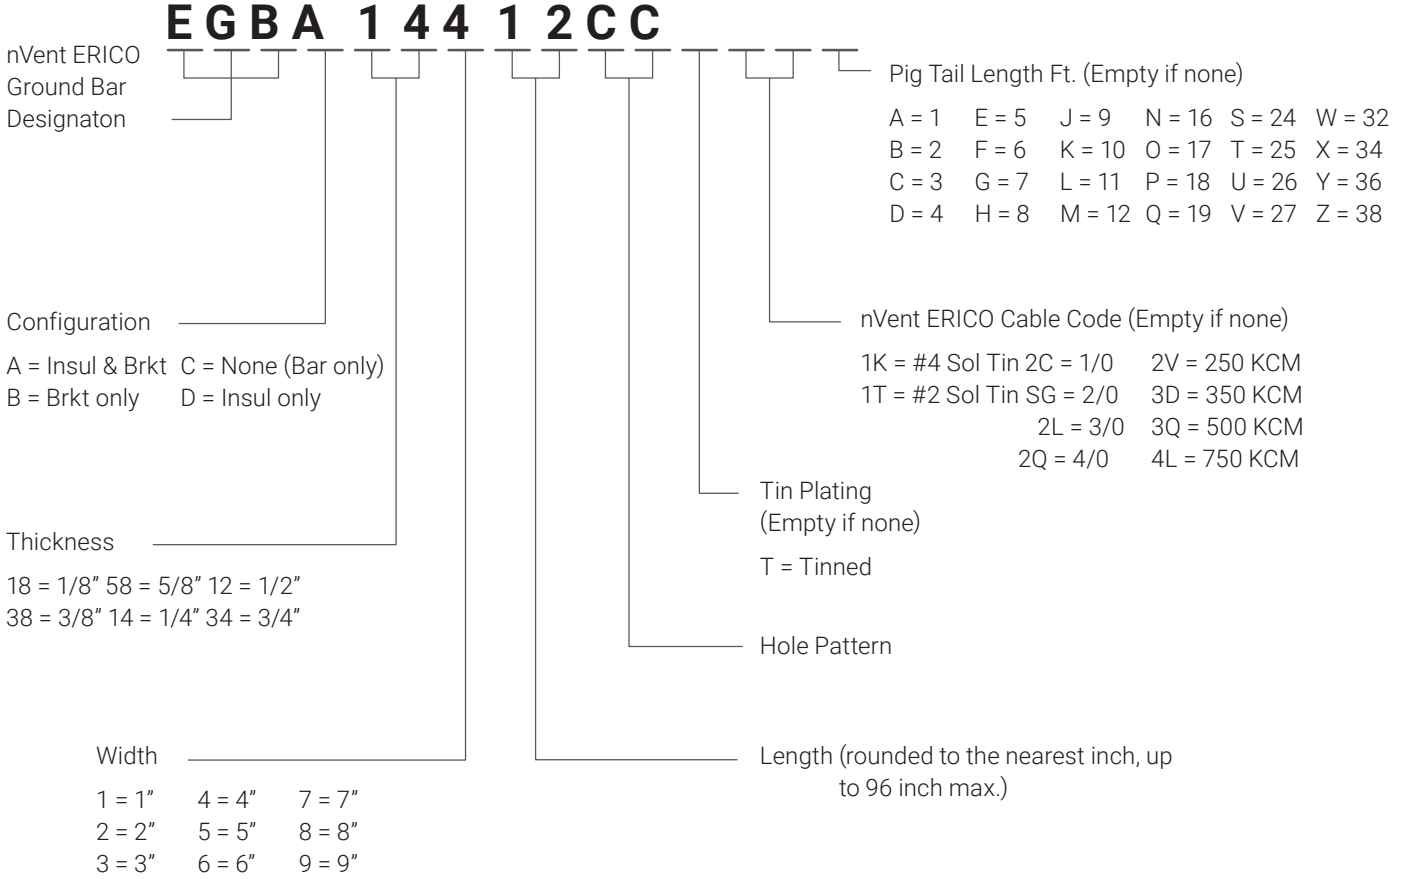


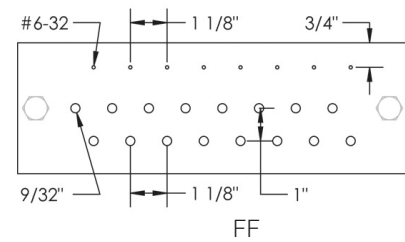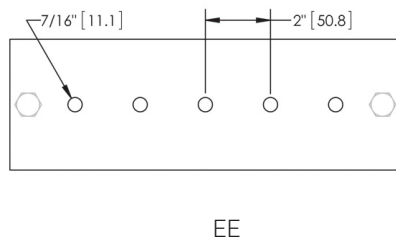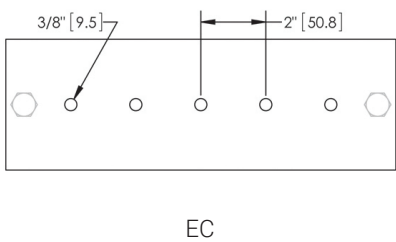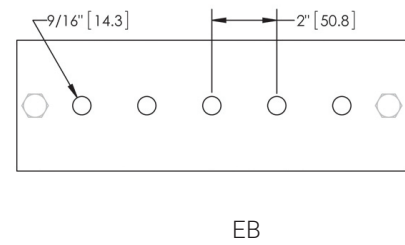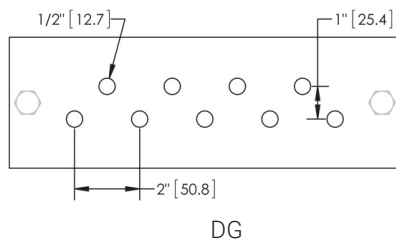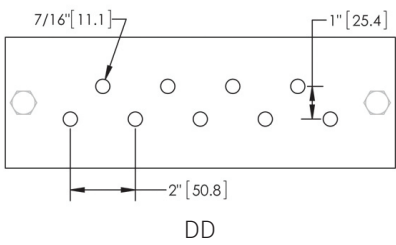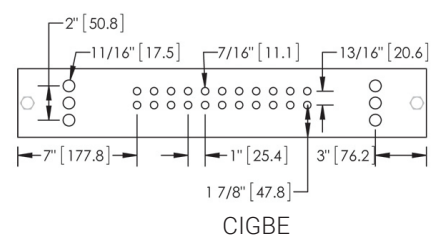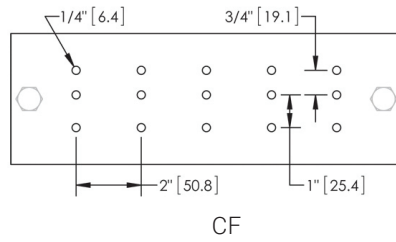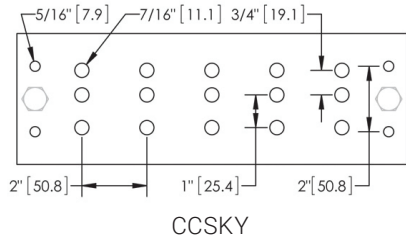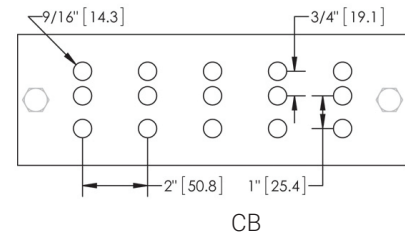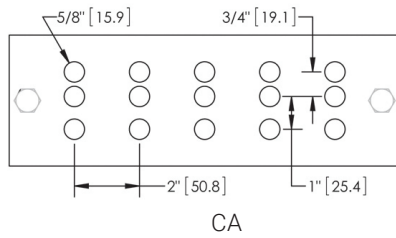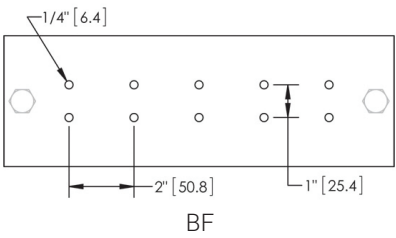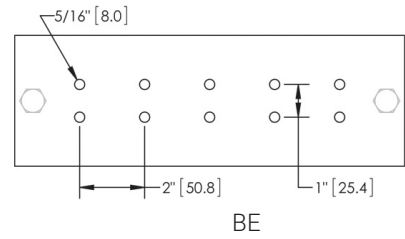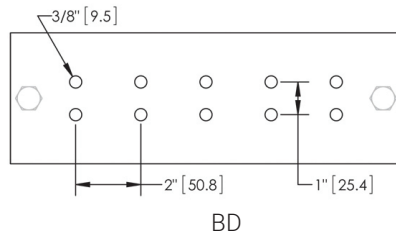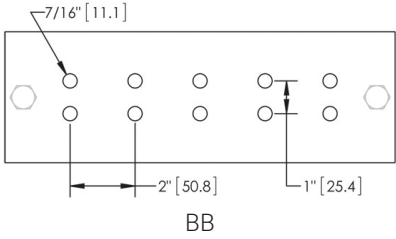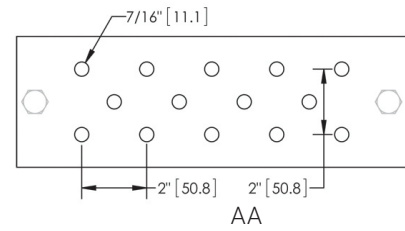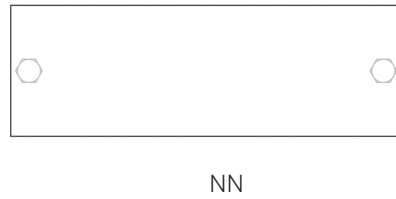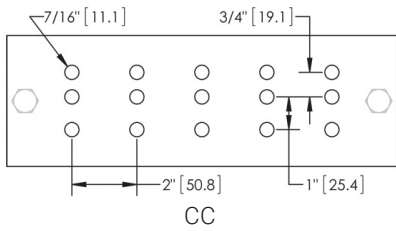

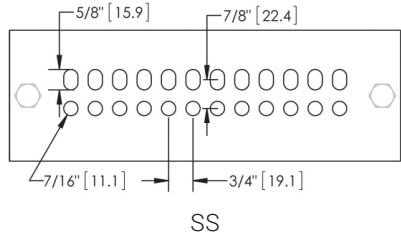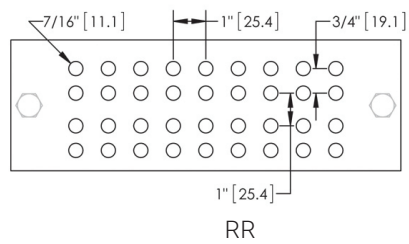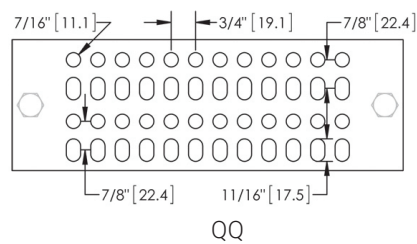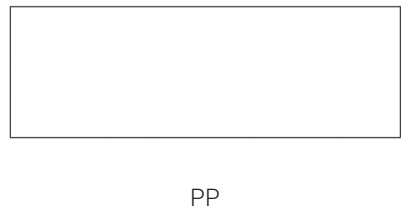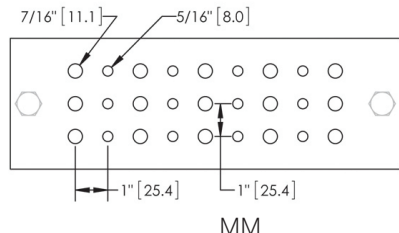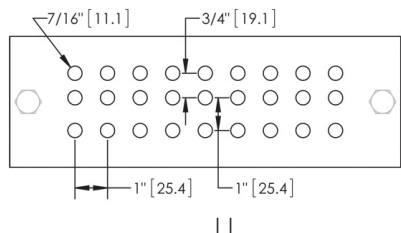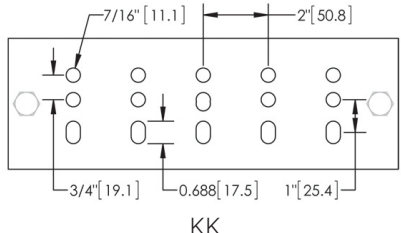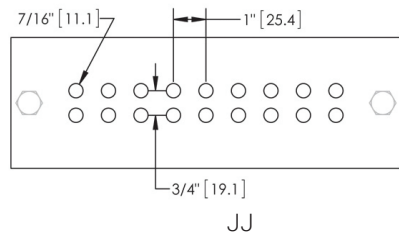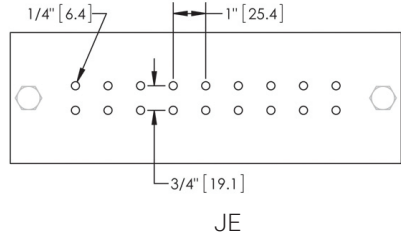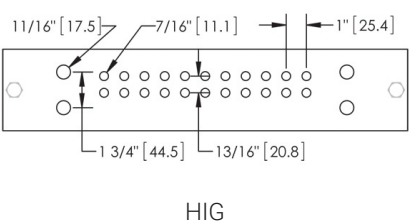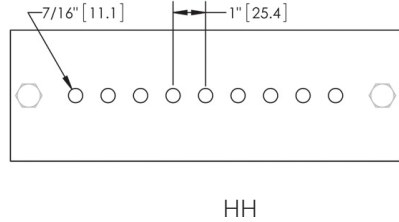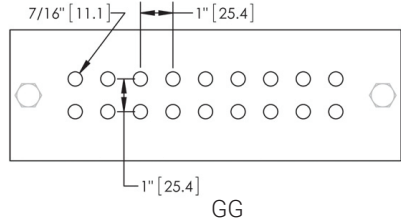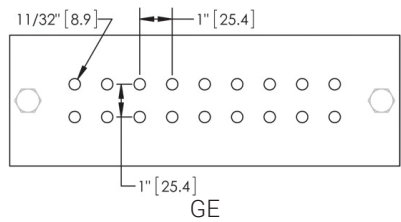

| Global Part Number | Hole Pattern | Mounting Hole Size | Length | Width | Thickness | Tin Plating | Pigtail Included |
|--------------------|--------------|--------------------|--------|-------|-----------|-------------|------------------|
| EGBA14112EE | EE | 0.438" | 12" | 1" | 1/4" | No | No |
| EGBA14212BB | BB | 0.438" | 12" | 2" | 1/4" | No | No |
| EGBA14212EE | EE | 0.438" | 12" | 2" | 1/4" | No | No |
| EGBA14212HH | HH | 0.438" | 12" | 2" | 1/4" | No | No |
| EGBA14212NN | NN | 0.438" | 12" | 2" | 1/4" | No | No |
| EGBA14212TES | TES | 0.438" | 12" | 2" | 1/4" | No | No |
| EGBA14215JJ | JJ | 0.438" | 15" | 2" | 1/4" | No | No |
| EGBA14215TES | TES | 0.438" | 15" | 2" | 1/4" | No | No |
| EGBA14224NN | NN | 0.438" | 24" | 2" | 1/4" | No | No |
| EGBA14406CC | CC | 0.438" | 6" | 4" | 1/4" | No | No |
| EGBA14410FF | FF | 0.438" | 10" | 4" | 1/4" | No | No |
| EGBA14412AA | AA | 0.438" | 12" | 4" | 1/4" | No | No |
| EGBA14412BB | BB | 0.438" | 12" | 4" | 1/4" | No | No |
| EGBA14412CC | CC | 0.438" | 12" | 4" | 1/4" | No | No |
| EGBA14412GG | GG | 0.438" | 12" | 4" | 1/4" | No | No |
| EGBA14412LL | LL | 0.438" | 12" | 4" | 1/4" | No | No |
| EGBA14412MM | MM | 0.438" | 12" | 4" | 1/4" | No | No |
| EGBA14412NN | NN | 0.438" | 12" | 4" | 1/4" | No | No |
| EGBA14420CC | CC | 0.438" | 20" | 4" | 1/4" | No | No |
| EGBA14420CCT | CC | 0.438" | 20" | 4" | 1/4" | Yes | No |
| EGBA14420NN | NN | 0.438" | 20" | 4" | 1/4" | No | No |
| EGBA14424CC | CC | 0.438" | 24" | 4" | 1/4" | No | No |
| EGBA14424GG | GG | 0.438" | 24" | 4" | 1/4" | No | No |
| EGBA14424LL | LL | 0.438" | 24" | 4" | 1/4" | No | No |
| EGBA14424MM | MM | 0.438" | 24" | 4" | 1/4" | No | No |
| EGBA14424NN | NN | 0.438" | 24" | 4" | 1/4" | No | No |
| EGBA14436CC | CC | 0.438" | 36" | 4" | 1/4" | No | No |

GROUNDING BUSBAR - ELECTRICAL BUSBAR

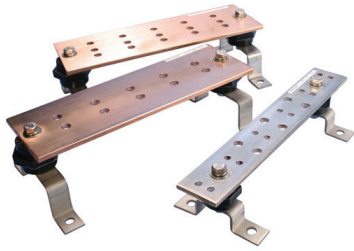

FEATURED HIGHLIGHTS

- Provides a convenient, single-point grounding and bonding location
- Conductors are welded to the bar using a Cadweld exothermic connection or are mechanically fastened by using lugs
- Custom bars can be designed and manufactured to customer specifications

E G B A 1 4 4 1 2 C C

nVent ERICO Ground Bar Designation

Configuration

A = Insul & Brkt C = None (Bar only)
B = Brkt only D = Insul only

Thickness

18 = 1/8" 58 = 5/8" 12 = 1/2"
38 = 3/8" 14 = 1/4" 34 = 3/4"

Width

1 = 1" 4 = 4" 7 = 7"
2 = 2" 5 = 5" 8 = 8"
3 = 3" 6 = 6" 9 = 9"

Pig Tail Length Ft. (Empty if none)

A = 1 E = 5 J = 9 N = 16 S = 24 W = 32
B = 2 F = 6 K = 10 O = 17 T = 25 X = 34
C = 3 G = 7 L = 11 P = 18 U = 26 Y = 36
D = 4 H = 8 M = 12 Q = 19 V = 27 Z = 38



















nVent ERICO Cable Code (Empty if none)














1K = #4 Sol Tin 2C = 1/0 2V = 250 KCM
1T = #2 Sol Tin SG = 2/0 3D = 350 KCM
2L = 3/0 3Q = 500 KCM
2Q = 4/0 4L = 750 KCM

Tin Plating (Empty if none)
T = Tinned

Hole Pattern

Length (rounded to the nearest inch, up to 96 inch max.)

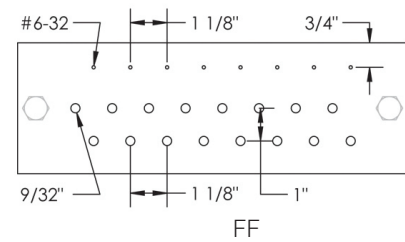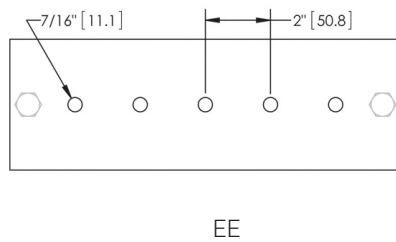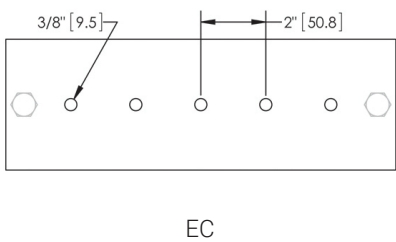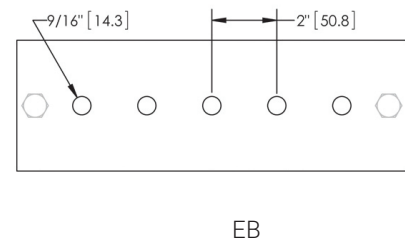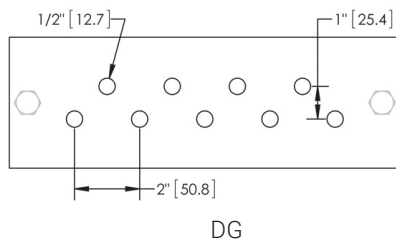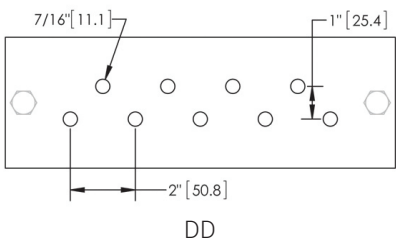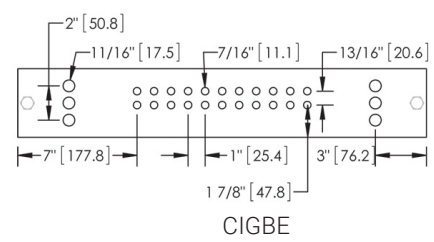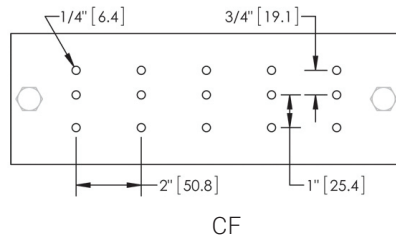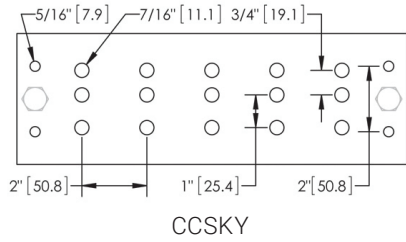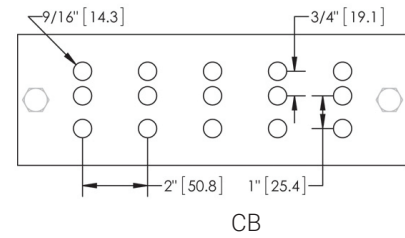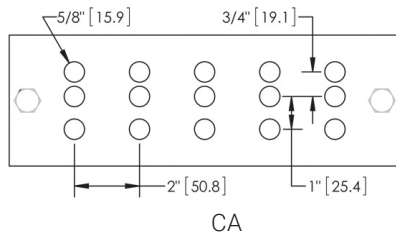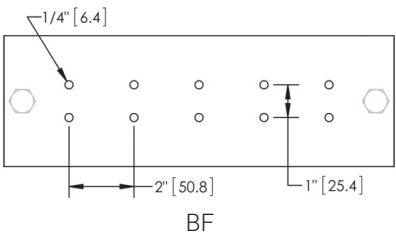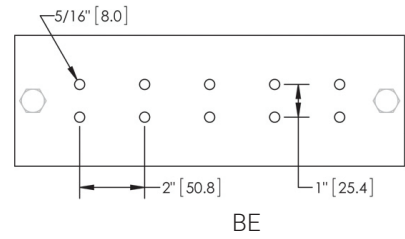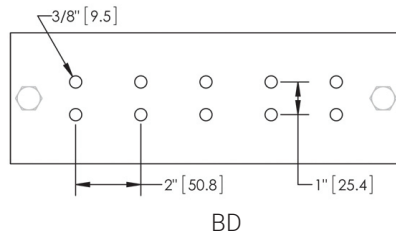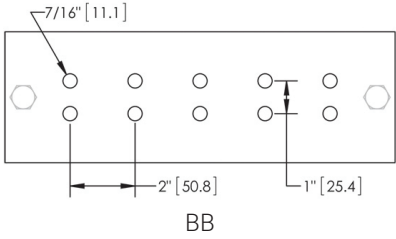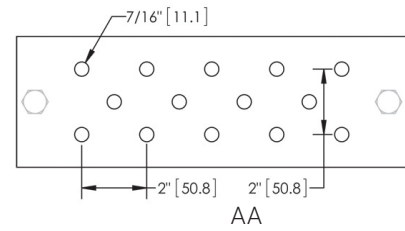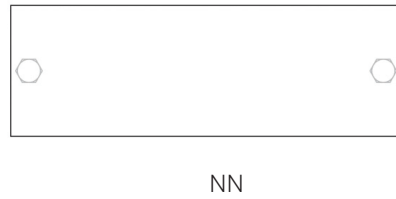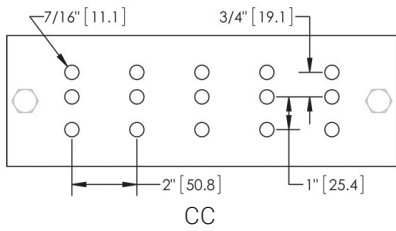

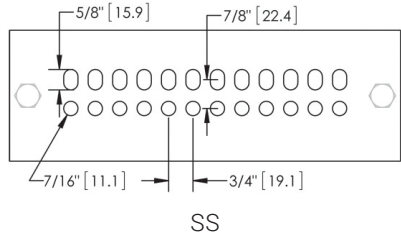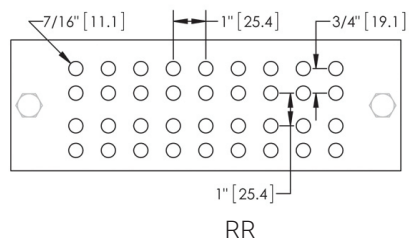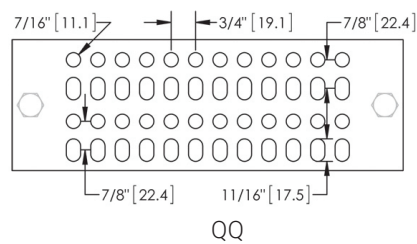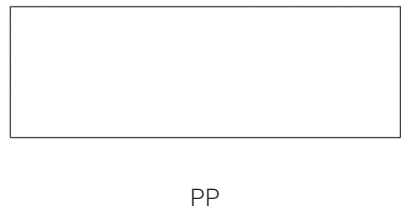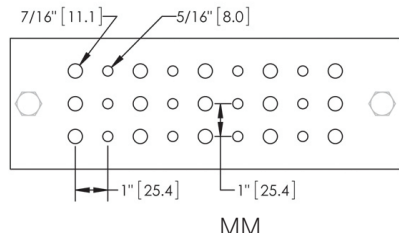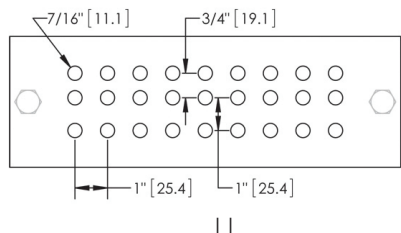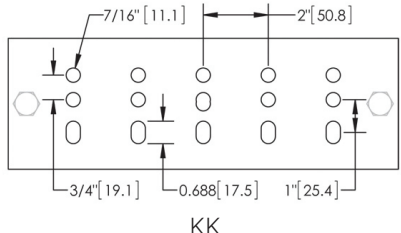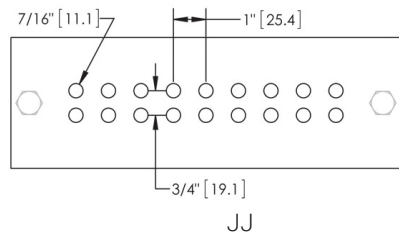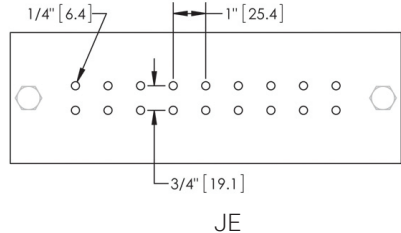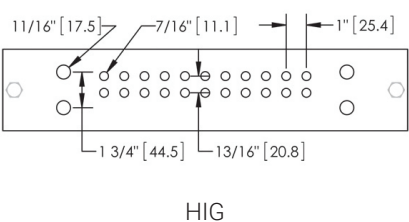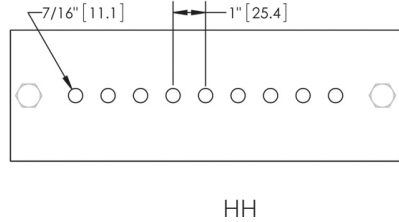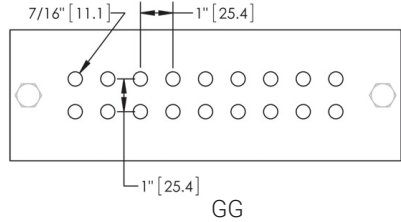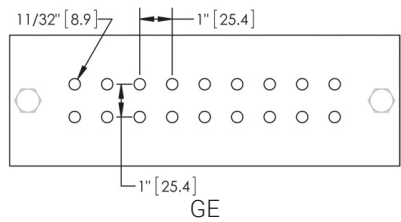

| Global Part Number | Hole Pattern | Mounting Hole Size | Length | Width | Thickness | Tin Plating | Pigtail Included |
|--------------------|--------------|--------------------|--------|-------|-----------|-------------|------------------|
| EGBA14112EE | EE | 0.438" | 12" | 1" | 1/4" | No | No |
| EGBA14212BB | BB | 0.438" | 12" | 2" | 1/4" | No | No |
| EGBA14212EE | EE | 0.438" | 12" | 2" | 1/4" | No | No |
| EGBA14212HH | HH | 0.438" | 12" | 2" | 1/4" | No | No |
| EGBA14212NN | NN | 0.438" | 12" | 2" | 1/4" | No | No |
| EGBA14212TES | TES | 0.438" | 12" | 2" | 1/4" | No | No |
| EGBA14215JJ | JJ | 0.438" | 15" | 2" | 1/4" | No | No |
| EGBA14215TES | TES | 0.438" | 15" | 2" | 1/4" | No | No |
| EGBA14224NN | NN | 0.438" | 24" | 2" | 1/4" | No | No |
| EGBA14406CC | CC | 0.438" | 6" | 4" | 1/4" | No | No |
| EGBA14410FF | FF | 0.438" | 10" | 4" | 1/4" | No | No |
| EGBA14412AA | AA | 0.438" | 12" | 4" | 1/4" | No | No |
| EGBA14412BB | BB | 0.438" | 12" | 4" | 1/4" | No | No |
| EGBA14412CC | CC | 0.438" | 12" | 4" | 1/4" | No | No |
| EGBA14412GG | GG | 0.438" | 12" | 4" | 1/4" | No | No |
| EGBA14412LL | LL | 0.438" | 12" | 4" | 1/4" | No | No |
| EGBA14412MM | MM | 0.438" | 12" | 4" | 1/4" | No | No |
| EGBA14412NN | NN | 0.438" | 12" | 4" | 1/4" | No | No |
| EGBA14420CC | CC | 0.438" | 20" | 4" | 1/4" | No | No |
| EGBA14420CCT | CC | 0.438" | 20" | 4" | 1/4" | Yes | No |
| EGBA14420NN | NN | 0.438" | 20" | 4" | 1/4" | No | No |
| EGBA14424CC | CC | 0.438" | 24" | 4" | 1/4" | No | No |
| EGBA14424GG | GG | 0.438" | 24" | 4" | 1/4" | No | No |
| EGBA14424LL | LL | 0.438" | 24" | 4" | 1/4" | No | No |
| EGBA14424MM | MM | 0.438" | 24" | 4" | 1/4" | No | No |
| EGBA14424NN | NN | 0.438" | 24" | 4" | 1/4" | No | No |
| EGBA14436CC | CC | 0.438" | 36" | 4" | 1/4" | No | No |