


FBX900 • FB900 • FB450 Fan/Fixture Boxes

Center a Fan/Fixture on Cathedral Ceilings w Angles over 80°

FBX900

Remove and use these screws to attach bracket ends to rafters

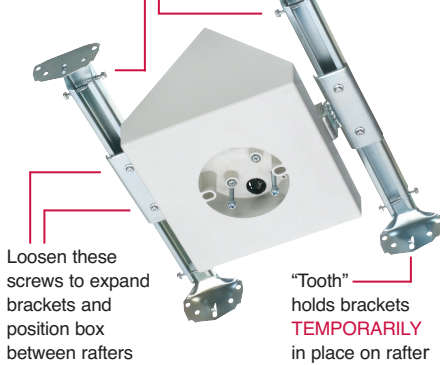

FBX900 includes a template to level and position brackets between rafters

FBX900 Installation



- For proper fan/fixture installation, use supplied template to level and position brackets between rafters. Remove captive screws on sides of brackets and use to attach FBX900 assembly to rafters.


FB900 Installation



Cut a 2x4 approx. 14" long to span rafters. Install FB900 in center, then attach the 2x4 to the rafters, keeping bottom of box level, and short sides of box touching angled rafters.



- Loosen the screws noted above. Slide box along brackets to center it between rafters. Tighten screws. Install wires.

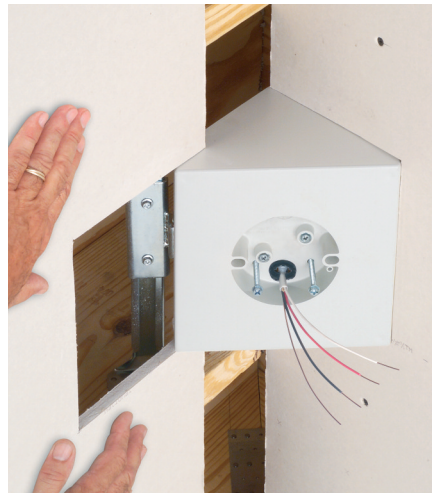

- Cut and position drywall to fit around the box. (Note captive screws in box). Install fan or fixture per manufacturer's instructions using captive installation screws.

FB450 Installation



Cut a 2x8 approximately 18" long. Install FB450 on 2x8 allowing it to extend 8 to 10" past the box. Keep bottom of box level, short side of box touching angled rafter. Nail or screw assembly to rafter.



Canadian orders ship w/ grounding lug required by CSA for fixtures

Arlington®

1 Stauffer Industrial Park
Scranton, PA 18517
800/233.4717 • Fax 570/562.0646
www.aifittings.com

CATALOG NUMBER	UPC/DCI/NAED MFG. #018997	DESCRIPTION	UNIT PKG	STD PKG
		14.5 cu inch Non-metallic Box		
FBX900	75224	Adjustable. Fits Cathedral Ceilings with angles 80 degrees AND OVER	1	1
FB900	75250	Fits Cathedral Ceilings with angles 80 degrees AND OVER	1	6
FB450	75240	Fits Sloped Ceilings with angles UP TO 45 degrees	1	6

All ship with captive installation screws and installed NM cable connector.
Textured, paintable non-metallic surface.

Ratings	UL	CSA
FBX900	70 lb Fan or Fixture	50 lb Fan or Fixture
FBX900	70 lb Fan • 200 lb Fixture	50 lb Fan or Fixture
FB450	70 lb Fan • 200 lb Fixture	50 lb Fan or Fixture

Distributed by