

DESCRIPTION

The H27RICT housing is designed for remodelling use in shallow ceilings where 2" x 6" joist construction is used. The wide variety of trims available allows a number of different lighting effects to be created with one basic housing.

APPLICATION

The H27RICT is designed for installations where the housing will be in direct contact with insulation.

DESIGN FEATURES

A...Housing

Aluminum housing for greater heat dissipation.

B...Socket Plate

Rigid socket plate adjusts and locks without tools for various lamp sizes.

C...Junction Box

U.L. listed for through branch circuit wiring. Seven conduit knockouts are uniform 1/2" size with true pryout slots. Four Romex pryouts included.

D...Socket

Porcelain socket with nickel plated brass screw shell.

E...Thermal Protector

Integral Thermal Protector deactivates fixture if an incorrect lamp is used or if ceiling insulation material is not applied correctly.

F...Remodel Clips

Four remodel clips secure housing and accommodate 1/2" and 5/8" ceiling material.

G..."Quick Connect" Connectors

Three "Quick Connect" connectors eliminate need for separate wire nuts - simply strip supply wires and push in

Labels

- U.L. listed for direct contact with insulation and combustible material
- UL listed for Feed Through
- UL Listed for Damp Location
- Meets State of California Title 24 requirements
- CSA Certified
- IP Rated



H27RICT


6" Insulated Ceiling Recessed Remodel Housing

6" TRIMS


FOR USE IN INSULATED CEILINGS

FOR USE IN EXISTING CEILINGS

FOR USE IN SHALLOW CEILINGS

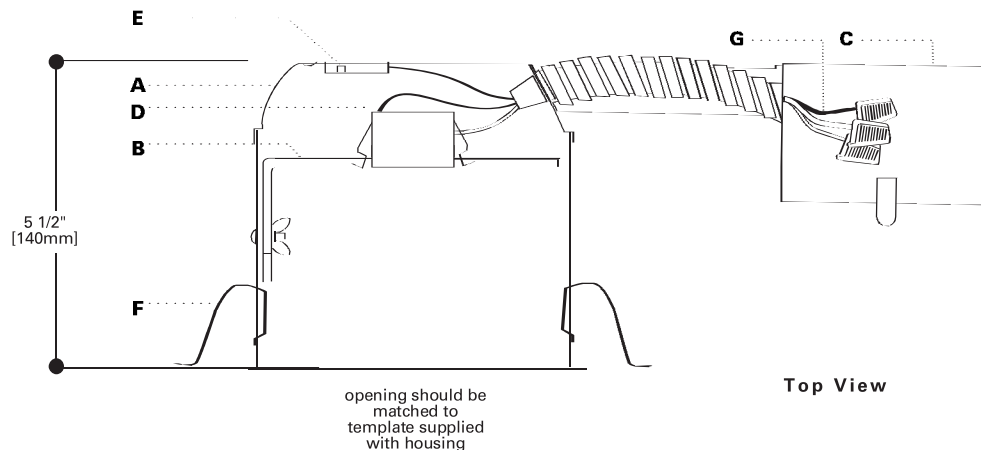

Top View



UPGRADE FEATURES:

- QUICK CONNECT CONNECTORS
- HALO ID

ADV042499

Supersedes ADV023113 & ADV000308

9/04

TAB: Recessed Incandescent
Sheet 30

TRIMS

ORDERING INFORMATION

SAMPLE NUMBER: H27RICT-426RG

Order housing, trim and accessories separately.

Housing

Trims

Accessories

H27RICT=6" Insulated Ceiling
Shallow Housing


REFLECTORS



426


Specular Reflector Cone
75W PAR30, 65W BR30,
65W PAR30L, 50W PAR30
 426=Specular Clear
 426=Haze
 426RG=Residential Gold
 426CG=Champagne Gold
 426MB=Specular Black
 OD: 7 1/4" (184mm)

BAFFLES



310

Baffle
65W BR30, 75W PAR30L, 50W PAR30
 310P=Black Baffle
 310W=White Baffle
 OD: 7 1/4" (184mm)



312

Baffle
65W BR30, 50W PAR30
 312P=Black Baffle
 312W=White Baffle
 OD: 7 1/4" (184mm)

ADJUSTABLES



77

Eyeball
50W R20, 50W PAR20
 77P=White Eyeball
 OD: 8" (203mm)



78

Eyeball - 30° Tilt
75W R30, 75W PAR30L
 78P=White Eyeball
 78SL=Silver
 78B=Brass Eyeball
 78PB=Polished Brass Eyeball
 78PAT=Polished Brass Eyeball
 OD: 8" (203mm)



90

Double Bubble - 60° Tilt
150W PAR38
 90P=White Double Bubble Adjustable
 OD: 8" (203mm)



420

Coilex Regressed Eyeball
50W PAR30, 50W PAR30L, 60W BR30
 420P=Black Baffle, White Eyeball
 420PB=Black Baffle, Polished Brass
 Eyeball

OPEN

420W=White Baffle, White Eyeball
 OD: 7 1/4" (184mm)



300

Open
65W BR30, 75W PAR30
 300P=White Open
 OD: 7 1/4" (184mm)



328

White Splay Trim
65W BR30, 75W PAR30L, 50W PAR30
 328P=White Splay
 OD: 7 3/4" (197mm)

LENS



Drop Opal with Reflector Cone
40W A19
 171P=Drop Opal
 171PS=Drop Opal Shower Light
 OD: 7 1/4" (184mm)

Metal Trim Rings

Compatible with 310, 312, 426
TRM6P=White Metal
TRM6PB=Polished Brass
TRM6C=Chrome
TRM6MB=Black Metal
TRM6SL=Silver Metal
TRP7MB=Black Plastic

Note: Specifications and Dimensions subject to change without notice.

Visit our web site at www.cooperlighting.com

DESCRIPTION

The H27RICT housing is designed for remodelling use in shallow ceilings where 2" x 6" joist construction is used. The wide variety of trims available allows a number of different lighting effects to be created with one basic housing.

APPLICATION

The H27RICT is designed for installations where the housing will be in direct contact with insulation.

DESIGN FEATURES

A...Housing

Aluminum housing for greater heat dissipation.

B...Socket Plate

Rigid socket plate adjusts and locks without tools for various lamp sizes.

C...Junction Box

U.L. listed for through branch circuit wiring. Seven conduit knockouts are uniform 1/2" size with true pryout slots. Four Romex pryouts included.

D...Socket

Porcelain socket with nickel plated brass screw shell.

E...Thermal Protector

Integral Thermal Protector deactivates fixture if an incorrect lamp is used or if ceiling insulation material is not applied correctly.

F...Remodel Clips

Four remodel clips secure housing and accommodate 1/2" and 5/8" ceiling material.

G..."Quick Connect" Connectors

Three "Quick Connect" connectors eliminate need for separate wire nuts - simply strip supply wires and push in

Labels

- U.L. listed for direct contact with insulation and combustible material
- UL listed for Feed Through
- UL Listed for Damp Location
- Meets State of California Title 24 requirements
- CSA Certified
- IP Rated



H27RICT


6" Insulated Ceiling Recessed Remodel Housing

6" TRIMS


FOR USE IN INSULATED CEILINGS

FOR USE IN EXISTING CEILINGS

FOR USE IN SHALLOW CEILINGS

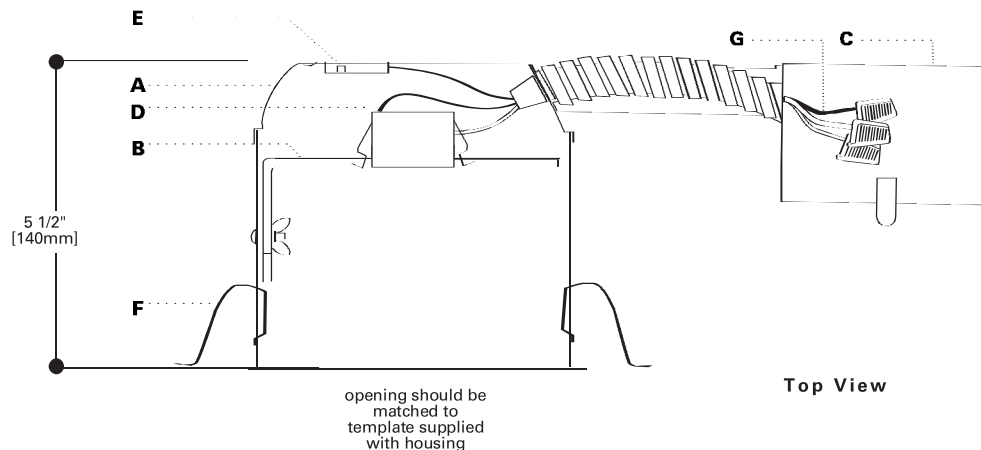

Top View



UPGRADE FEATURES:

- QUICK CONNECT CONNECTORS
- HALO ID

ADV042499

Supersedes ADV023113 & ADV000308

9/04

TAB: Recessed Incandescent
Sheet 30

TRIMS

ORDERING INFORMATION

SAMPLE NUMBER: H27RICT-426RG

Order housing, trim and accessories separately.

Housing

Trims

Accessories

H27RICT=6" Insulated Ceiling
Shallow Housing


REFLECTORS



426


Specular Reflector Cone
75W PAR30, 65W BR30,
65W PAR30L, 50W PAR30
 426=Specular Clear
 426=Haze
 426RG=Residential Gold
 426CG=Champagne Gold
 426MB=Specular Black
 OD: 7 1/4" (184mm)

BAFFLES



310

Baffle
65W BR30, 75W PAR30L, 50W PAR30
 310P=Black Baffle
 310W=White Baffle
 OD: 7 1/4" (184mm)



312

Baffle
65W BR30, 50W PAR30
 312P=Black Baffle
 312W=White Baffle
 OD: 7 1/4" (184mm)

ADJUSTABLES



77

Eyeball
50W R20, 50W PAR20
 77P=White Eyeball
 OD: 8" (203mm)



78

Eyeball - 30° Tilt
75W R30, 75W PAR30L
 78P=White Eyeball
 78SL=Silver
 78B=Brass Eyeball
 78PB=Polished Brass Eyeball
 78PAT=Polished Brass Eyeball
 OD: 8" (203mm)



90

Double Bubble - 60° Tilt
150W PAR38
 90P=White Double Bubble Adjustable
 OD: 8" (203mm)



420

Coilex Regressed Eyeball
50W PAR30, 50W PAR30L, 60W BR30
 420P=Black Baffle, White Eyeball
 420PB=Black Baffle, Polished Brass
 Eyeball
 420W=White Baffle, White Eyeball
 OD: 7 1/4" (184mm)

OPEN



300

Open
65W BR30, 75W PAR30
 300P=White Open
 OD: 7 1/4" (184mm)



328

White Splay Trim
65W BR30, 75W PAR30L, 50W PAR30
 328P=White Splay
 OD: 7 3/4" (197mm)

LENS



Drop Opal with Reflector Cone
40W A19
 171P=Drop Opal
 171PS=Drop Opal Shower Light
 OD: 7 1/4" (184mm)

Metal Trim Rings

Compatible with 310, 312, 426
TRM6P=White Metal
TRM6PB=Polished Brass
TRM6C=Chrome
TRM6MB=Black Metal
TRM6SL=Silver Metal
TRP7MB=Black Plastic

Note: Specifications and Dimensions subject to change without notice.

Visit our web site at www.cooperlighting.com