

UPC: 019813748986

Color: White

Weight: 2.4 lbs

Project:

Type:

Prepared By:

Date:

Technical Specifications

Performance

Product Type:

HID Replacement

Input Wattage:

60W

Wattage Equivalency:

250W HID

Lumens:

9,300lm

Efficacy:

155lm/W

Construction

Bulb Shape:

Wall Pack




Minimum Compartment Size

Length x Width x Height [in]	Lamp Quantity
8	1


Case and Pallet Dimensions

	QTY	LENGTH (in)	WIDTH (in)	HEIGHT (in)
CASE	12	16.7	12.7	13
PALLET	216	27.3	35.4	42.5


Wiring Diagram

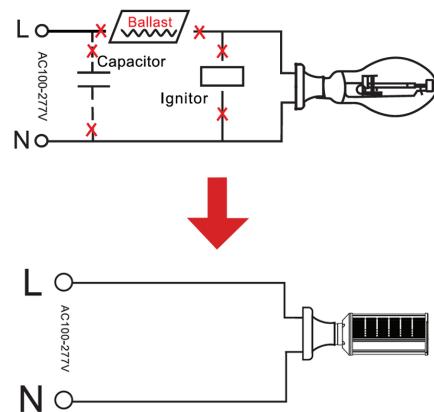

Dimension

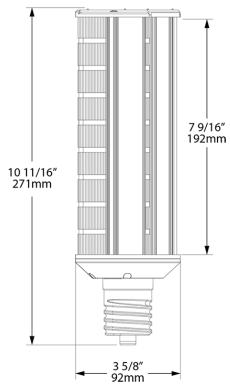

Light Distribution

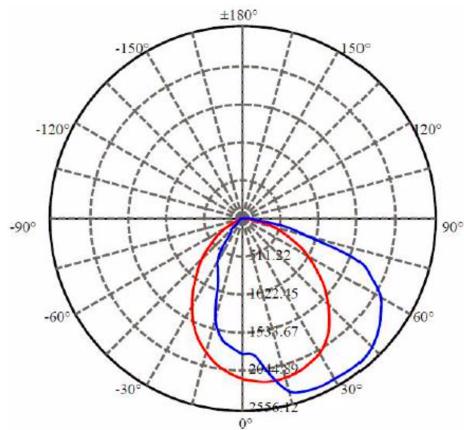

Features

- Replacement for traditional Metal Halide or High Pressure Sodium HID Lamps
- Ideal for wall pack retrofit applications
- Optimized for Horizontal Applications with Directional Light Output and Rotatable base
- Active Cooling: Internal sensor overheated and engaged will automatically reduce output to 70% rated wattage until the sensor cools and will light up again to 100%
- Integral Driver enables lamp to be wired directly to line voltage without need for an external driver or ballast
- Rated for use in enclosed and open fixtures in dry or damp locations
- 4kV surge protection built in
- 50,000 hour Lifespan
- Environmentally friendly, no mercury used
- UL Listed, UL Classified, DLC Listed

HID-60-H-EX39-850-BYP-WP




Non-Dimmable

5 Year No Compromise Warranty

Ordering Matrix

Family	Wattage	Orientation	Base Type	CRI/Color Temp	Installation Type	Lamp Type
HID	-	60	-	H	-	EX39
		20 = 20W				850 = 5000K
		30 = 30W				840 = 4000K
		40 = 40W				830 = 3000K
		60 = 60W				
			H = Horizontal		BYP = Bypass	
						WP = Wall Pack

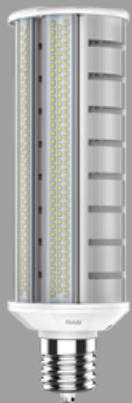

UPC: 019813748986

Color: White

Weight: 2.4 lbs

Project:

Type:

Prepared By:

Date:

Technical Specifications

Performance

Product Type:

HID Replacement

Input Wattage:

60W

Wattage Equivalency:

250W HID

Lumens:

9,300lm

Efficacy:

155lm/W

Construction

Bulb Shape:

Wall Pack




Minimum Compartment Size

Length x Width x Height [in]	Lamp Quantity
8	1


Case and Pallet Dimensions

	QTY	LENGTH (in)	WIDTH (in)	HEIGHT (in)
CASE	12	16.7	12.7	13
PALLET	216	27.3	35.4	42.5


Wiring Diagram

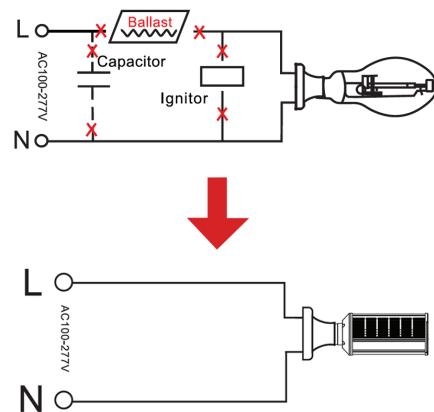

Dimension

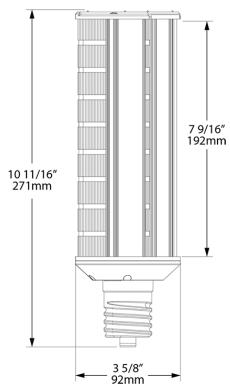

Light Distribution

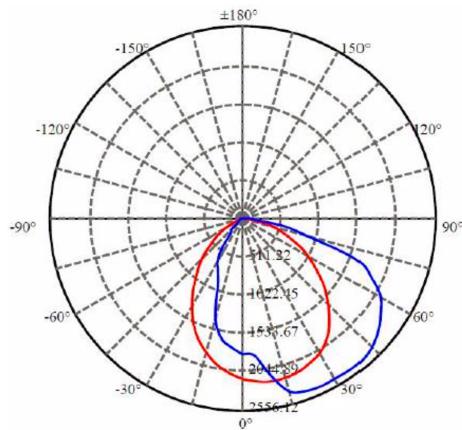

Features

- Replacement for traditional Metal Halide or High Pressure Sodium HID Lamps
- Ideal for wall pack retrofit applications
- Optimized for Horizontal Applications with Directional Light Output and Rotatable base
- Active Cooling: Internal sensor overheat and engaged will automatically reduce output to 70% rated wattage until the sensor cools and will light up again to 100%
- Integral Driver enables lamp to be wired directly to line voltage without need for an external driver or ballast
- Rated for use in enclosed and open fixtures in dry or damp locations
- 4kV surge protection built in
- 50,000 hour Lifespan
- Environmentally friendly, no mercury used
- UL Listed, UL Classified, DLC Listed

HID-60-H-EX39-850-BYP-WP



Non-Dimmable

5 Year No Compromise Warranty

Ordering Matrix

Family	Wattage	Orientation	Base Type	CRI/Color Temp	Installation Type	Lamp Type
HID	-	60	-	H	-	EX39
		20 = 20W				850 = 5000K
		30 = 30W				840 = 4000K
		40 = 40W				830 = 3000K
		60 = 60W				
			H = Horizontal		BYP = Bypass	
						WP = Wall Pack