



# KT-LED80HID-EX39-850-D

## HID REPLACEMENT LED LAMP

rev.1

### DESCRIPTION

80W HID Replacement LED Lamp | 5000K | >83 CRI | IP64 Rated



|   |
|---|
| <b>LAMP TYPE:</b> HID Replacement LED   |
| <b>BASE TYPE:</b> EX39 (Mogul)          |
| <b>WATTAGE:</b> 80W                     |
| <b>COLOR TEMPERATURE:</b> 5000K         |
| <b>METAL HALIDE EQUIVALENT:</b> 320W    |
| <b>COLOR RENDERING INDEX (CRI):</b> >83 |
| <b>WARRANTY:</b> 5 Years                |



### PRODUCT FEATURES

- Replacement for Conventional Metal Halide Lamp
- Non-Dimmable; Do Not Dim
- 50,000+ Hour Lifetime
- Environmentally Friendly: No Mercury Used
- Instant Startup
- UL Listed
- DLC Listed
- Operating Temperature: -29°C/-20°F to 60°C/140°F
- Suitable for Use in Fully Enclosed Fixture
- Integral Driver, Eliminates the Need for External Driver or Ballast; Includes 6kV Surge Protection
- IP64 Rated; Integrated Heat Sink Quickly Dissipates Heat and Guides Water Intrusion Out of the Lamp
- Active Cooling Technology: When Internal Thermal Sensor Reaches 84°C, Lamp Power Reduces To 80% Of Max; When Sensor Cools To 65°C Lamp Powers Back Up To 100% Rated Power
- Lamp Includes Safety Tether for Additional Security When Installing Lamp in Luminaire

### OPERATING SPECIFICATIONS

#### ELECTRICAL CHARACTERISTICS

| Input Voltage | Power Consumption | Power Factor | Input Current                |
|---------------|-------------------|--------------|------------------------------|
| 120-277Vac    | 80W               | >0.9         | 0.73A @ 120V<br>0.32A @ 277V |


#### RATED LIFE

| L70 (Hours) | 50,000 |
|-------------|--------|
|             |        |


#### PHOTOMETRIC CHARACTERISTICS

|                             |           |
|-----------------------------|-----------|
| Color Temperature (CCT)     | 5000K     |
| Luminous Flux               | 11,300 lm |
| Color Rendering Index (CRI) | >83       |
| Efficacy                    | 141 lm/W  |
| Visible Light Area          | 360°      |

#### SPECTRAL DISTRIBUTION

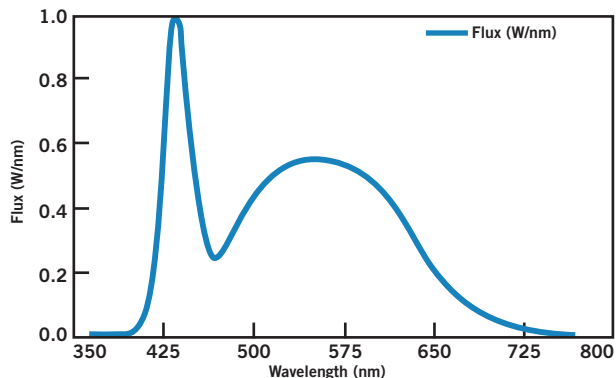

#### LUX DISTANCE CURVE

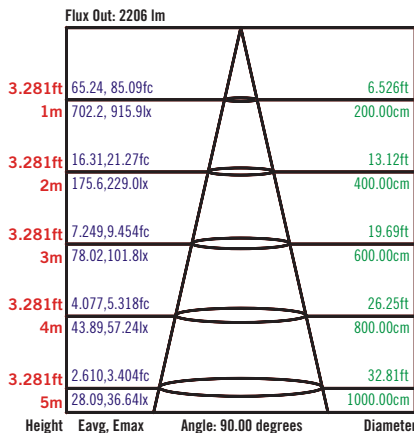


Note: The curves indicate the illuminated area and the average illumination when the luminaire is at a different distance.




# KT-LED80HID-EX39-850-D

## HID REPLACEMENT LED LAMP

rev.1



E39 MOGUL SOCKET



EX39 MOGUL SOCKET

**EX39-based lamps will work in both E39 and EX39 sockets.**

### WIRING DIAGRAM

**STEP 1**


**Disconnect power.** Disconnect and remove existing ballast, capacitor, and/or ignitor (where applicable) from fixture.

**STEP 2**


Rewire for line voltage to the lamp socket.

**STEP 3**


Install new LED replacement lamp. Ensure lamp is operating properly when power is turned on.

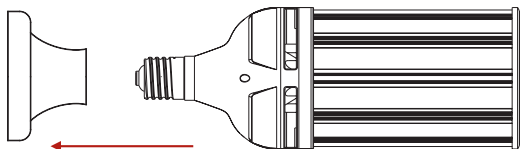


**FIGURE 1**

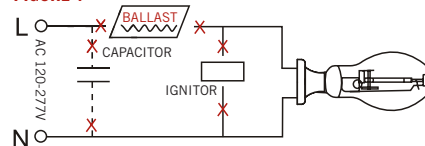



**FIGURE 2**

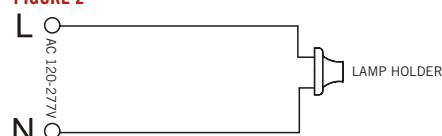

**FIGURE 3**

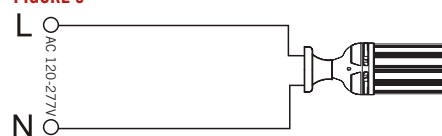

### PHYSICAL CHARACTERISTICS

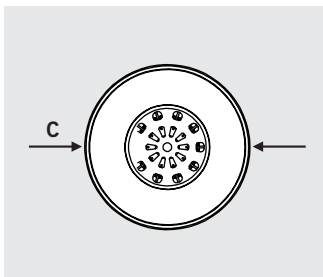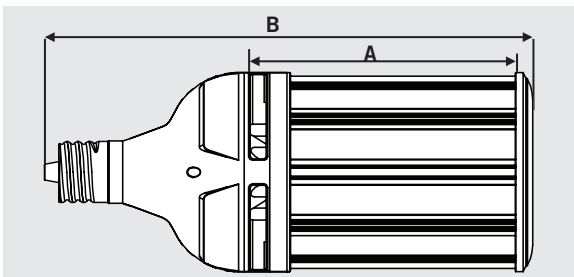

#### LAMP DIMENSIONS

|                        |       |
|------------------------|-------|
| A (Illuminated Length) | 4.61" |
| B (Body Length)        | 11.4" |
| C (Diameter)           | 5.12" |


BASE TYPE: EX39 (Mogul)

### ORDERING INFORMATION

| ORDER CODE                  | PACKAGING STYLE                       | PACK QTY. | ITEM STATUS |
|-----------------------------|---------------------------------------|-----------|-------------|
| KT-LED80HID-EX39-850-D rev1 | Distributor Pack (Individual Cartons) | 6         | Quick Ship  |

### CATALOG NUMBER BREAKDOWN

# KT-LED80HID-EX39-850-D rev1





# KT-LED80HID-EX39-850-D

## HID REPLACEMENT LED LAMP

rev.1

### DESCRIPTION

80W HID Replacement LED Lamp | 5000K | >83 CRI | IP64 Rated



|   |
|---|
| <b>LAMP TYPE:</b> HID Replacement LED   |
| <b>BASE TYPE:</b> EX39 (Mogul)          |
| <b>WATTAGE:</b> 80W                     |
| <b>COLOR TEMPERATURE:</b> 5000K         |
| <b>METAL HALIDE EQUIVALENT:</b> 320W    |
| <b>COLOR RENDERING INDEX (CRI):</b> >83 |
| <b>WARRANTY:</b> 5 Years                |



### PRODUCT FEATURES

- Replacement for Conventional Metal Halide Lamp
- Non-Dimmable; Do Not Dim
- 50,000+ Hour Lifetime
- Environmentally Friendly: No Mercury Used
- Instant Startup
- UL Listed
- DLC Listed
- Operating Temperature: -29°C/-20°F to 60°C/140°F
- Suitable for Use in Fully Enclosed Fixture
- Integral Driver, Eliminates the Need for External Driver or Ballast; Includes 6kV Surge Protection
- IP64 Rated; Integrated Heat Sink Quickly Dissipates Heat and Guides Water Intrusion Out of the Lamp
- Active Cooling Technology: When Internal Thermal Sensor Reaches 84°C, Lamp Power Reduces To 80% Of Max; When Sensor Cools To 65°C Lamp Powers Back Up To 100% Rated Power
- Lamp Includes Safety Tether for Additional Security When Installing Lamp in Luminaire

### OPERATING SPECIFICATIONS

#### ELECTRICAL CHARACTERISTICS

| Input Voltage | Power Consumption | Power Factor | Input Current                |
|---------------|-------------------|--------------|------------------------------|
| 120-277Vac    | 80W               | >0.9         | 0.73A @ 120V<br>0.32A @ 277V |


#### RATED LIFE

| L70 (Hours) | 50,000 |
|-------------|--------|
|             |        |


#### PHOTOMETRIC CHARACTERISTICS

|                             |           |
|-----------------------------|-----------|
| Color Temperature (CCT)     | 5000K     |
| Luminous Flux               | 11,300 lm |
| Color Rendering Index (CRI) | >83       |
| Efficacy                    | 141 lm/W  |
| Visible Light Area          | 360°      |

#### SPECTRAL DISTRIBUTION

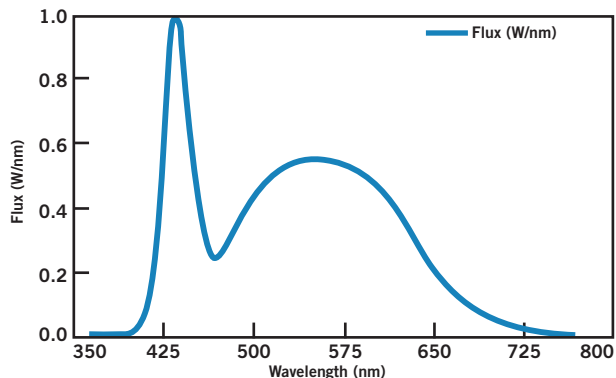

#### LUX DISTANCE CURVE

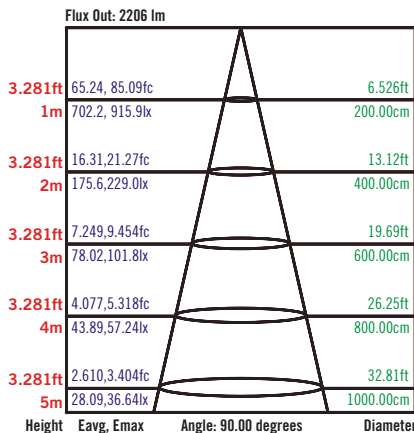


Note: The curves indicate the illuminated area and the average illumination when the luminaire is at a different distance.




# KT-LED80HID-EX39-850-D

## HID REPLACEMENT LED LAMP

rev.1



E39 MOGUL SOCKET



EX39 MOGUL SOCKET

**EX39-based lamps will work in both E39 and EX39 sockets.**

### WIRING DIAGRAM

#### STEP 1

**Disconnect power.** Disconnect and remove existing ballast, capacitor, and/or ignitor (where applicable) from fixture.

#### STEP 2

Rewire for line voltage to the lamp socket.

#### STEP 3

Install new LED replacement lamp. Ensure lamp is operating properly when power is turned on.

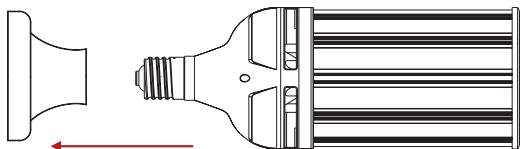


FIGURE 1

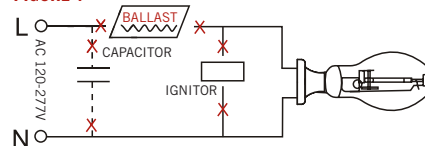


FIGURE 2




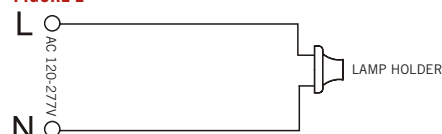


FIGURE 3

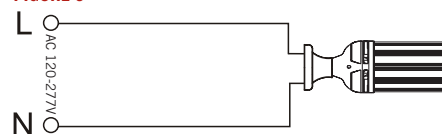

### PHYSICAL CHARACTERISTICS

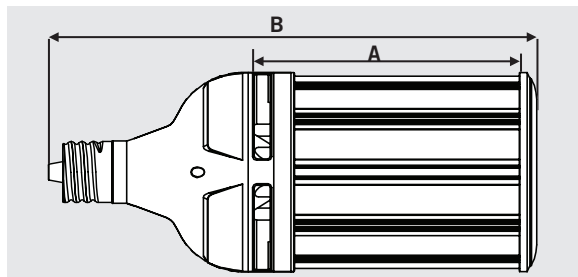

#### LAMP DIMENSIONS

|                        |       |
|------------------------|-------|
| A (Illuminated Length) | 4.61" |
| B (Body Length)        | 11.4" |
| C (Diameter)           | 5.12" |

BASE TYPE: EX39 (Mogul)

### ORDERING INFORMATION

| ORDER CODE                  | PACKAGING STYLE                       | PACK QTY. | ITEM STATUS |
|-----------------------------|---------------------------------------|-----------|-------------|
| KT-LED80HID-EX39-850-D rev1 | Distributor Pack (Individual Cartons) | 6         | Quick Ship  |

### CATALOG NUMBER BREAKDOWN

# KT-LED80HID-EX39-850-D rev1

