



LED Low Profile Thermoplastic Emergency Light Specification

LED Emergency Light

120 or 277 Voltage, Damp Location

Features and Benefits:

Illumination

- Long lasting, efficient ultra-bright white LEDs.
- High-performance chrome-plated metalized reflector and polycarbonate lens for optimal light distribution.
- Adjustable LED lamp heads increases center-to center spacing with 8 LEDs in each lamp head. Optional 12 LEDs per lamp head increases center-to center spacing to 18'.

Electrical

- Dual 120V/277V.
- Charge rate/power "ON" LED indicator light and push to test switch for mandated code compliance testing.
- LVD (low voltage disconnect) prevents battery from deep discharge.
- Long-life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transformer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

Mounting

- Surface mount via quick-connect back plate fits most standard size junction boxes and snaps into place make internal electrical connections.
- Conduit mount knockout on top of housing.
- Suitable for wall or ceiling mount.

Housing

- Injection-molded, engineering-grade, V-0 flame retardant, high-impact, thermoplastic in white or black finish.


Warranty/Listing

- Three year warranty on all electronics and housing. Batteries pro-rated for five years.
- UL listed for damp locations (0°-50°C/32°F-122°F standard).
- Meets UL924, NFPA101 Life Safety Code, NEC, OSHA, Local and State Codes.


Catalog Number

Notes

Type

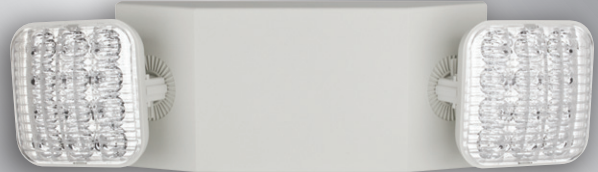

Dimensions:

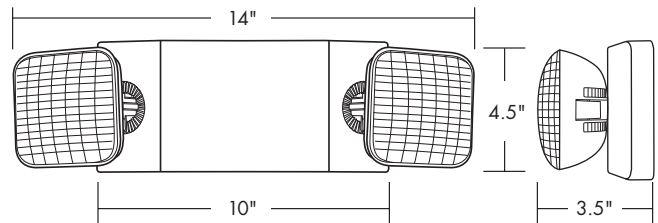

| Warranties & Compliances: | Item # | Description | LED Color | Housing Color | TCP Traditional Equivalents | |
|--|---|--|--|---------------|-----------------------------|---------------|
| Battery Pro-Rated 5 YEAR WARRANTY Electronics/Housing 3 YEAR WARRANTY | Ordering Information: | | | | | |
| | LED EMERGENCY LIGHTING – WHITE HOUSING | | | | | |
| | | LEDWEL | White LED Emergency Light | White | White | 20760, 20761 |
| | | LEDWELRC | White LED Emergency Light Remote Capable | White | White | 20765 |
| | | LEDWELSDT | White LED Emergency Light, Self Diagnostic Test | White | White | 20766SD |
| | | LEDWELRCSDT | White LED Emergency Light, White Remote Capable, Self Diagnostic Test | White | White | 20765,20766SD |
| | | LED REMOTE HEADS – WHITE HOUSING | | | | |
| | Accessories | LEDEL1SDT | LED Emergency Lighting Remote Head Single, Self Diagnostic Test | White | White | 207R1 |
| | | LEDEL2SDT | LED Emergency Lighting Remote Head Double, Self Diagnostic Test | White | White | 207R2 |
| | | LEDEL1SDTWL | LED Emergency Lighting Single Remote Head Wet Location, Self Diagnostic Test | White | White | |
| | | LEDEL2SDTWL | LED Emergency Lighting Double Remote Head Wet Location, Self Diagnostic Test | White | White | |
| | | LED EMERGENCY LIGHTING – BLACK HOUSING | | | | |
| | | LEDWELB | Black LED Emergency Light | White | Black | 20762,20763D |
| | | LEDWELRCB | Black LED Emergency Light Remote Capable | White | Black | |
| | | LEDWELSDTB | Black LED Emergency Light, Self Diagnostic Test | White | Black | |
| | | LEDWELRCSDTB | Black LED Emergency Light, White Remote Capable, Self Diagnostic Test | White | Black | |
| | | LED REMOTE HEADS – BLACK HOUSING | | | | |
| | Accessories | LEDEL1SDTB | LED Emergency Lighting Remote Head Single, Self Diagnostic Test | White | Black | |
| | | LEDEL2SDTB | LED Emergency Lighting Remote Head Double, Self Diagnostic Test | White | Black | |
| | | LEDEL1SDTWLB | LED Emergency Lighting Single Remote Head Wet Location, Self Diagnostic Test | White | Black | |
| LEDEL2SDTWLB | | LED Emergency Lighting Double Remote Head Wet Location, Self Diagnostic Test | White | Black | | |



LED Low Profile Thermoplastic Emergency Light Specification

LED Emergency Light

120 or 277 Voltage, Damp Location

Features and Benefits:

Illumination

- Long lasting, efficient ultra-bright white LEDs.
- High-performance chrome-plated metalized reflector and polycarbonate lens for optimal light distribution.
- Adjustable LED lamp heads increases center-to center spacing with 8 LEDs in each lamp head. Optional 12 LEDs per lamp head increases center-to center spacing to 18'.

Electrical

- Dual 120V/277V.
- Charge rate/power "ON" LED indicator light and push to test switch for mandated code compliance testing.
- LVD (low voltage disconnect) prevents battery from deep discharge.
- Long-life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transformer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

Mounting

- Surface mount via quick-connect back plate fits most standard size junction boxes and snaps into place make internal electrical connections.
- Conduit mount knockout on top of housing.
- Suitable for wall or ceiling mount.

Housing

- Injection-molded, engineering-grade, V-0 flame retardant, high-impact, thermoplastic in white or black finish.


Warranty/Listing

- Three year warranty on all electronics and housing. Batteries pro-rated for five years.
- UL listed for damp locations (0°-50°C/32°F-122°F standard).
- Meets UL924, NFPA101 Life Safety Code, NEC, OSHA, Local and State Codes.


Catalog Number

Notes

Type

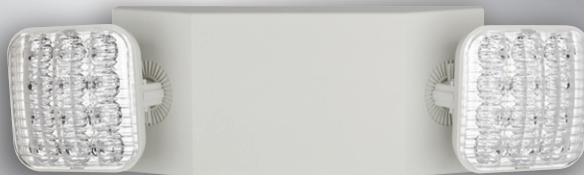

Dimensions:

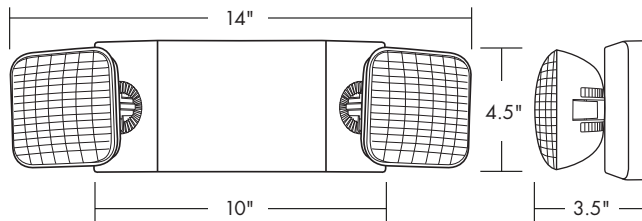

| Warranties & Compliances: | Item # | Description | LED Color | Housing Color | TCP Traditional Equivalents | |
|--|---|--|--|---------------|-----------------------------|-------|
| Ordering Information: | | | | | | |
| Battery Pro-Rated 5 YEAR WARRANTY Electronics/Housing 3 YEAR WARRANTY | LED EMERGENCY LIGHTING – WHITE HOUSING | | | | | |
| | LEDWEL | White LED Emergency Light | White | White | 20760, 20761 | |
| | LEDWELRC | White LED Emergency Light Remote Capable | White | White | 20765 | |
| | LEDWELSDT | White LED Emergency Light, Self Diagnostic Test | White | White | 20766SD | |
| | LEDWELRCSDT | White LED Emergency Light, White Remote Capable, Self Diagnostic Test | White | White | 20765,20766SD | |
| | Accessories | LED REMOTE HEADS – WHITE HOUSING | | | | |
| | | LEDEL1SDT | LED Emergency Lighting Remote Head Single, Self Diagnostic Test | White | White | 207R1 |
| | | LEDEL2SDT | LED Emergency Lighting Remote Head Double, Self Diagnostic Test | White | White | 207R2 |
| | | LEDEL1SDTWL | LED Emergency Lighting Single Remote Head Wet Location, Self Diagnostic Test | White | White | |
| | LEDEL2SDTWL | LED Emergency Lighting Double Remote Head Wet Location, Self Diagnostic Test | White | White | | |
| Accessories | LED EMERGENCY LIGHTING – BLACK HOUSING | | | | | |
| | LEDWELB | Black LED Emergency Light | White | Black | 20762,20763D | |
| | LEDWELRCB | Black LED Emergency Light Remote Capable | White | Black | | |
| | LEDWELSDTB | Black LED Emergency Light, Self Diagnostic Test | White | Black | | |
| | LEDWELRCSDTB | Black LED Emergency Light, White Remote Capable, Self Diagnostic Test | White | Black | | |
| | LED REMOTE HEADS – BLACK HOUSING | | | | | |
| | LEDEL1SDTB | LED Emergency Lighting Remote Head Single, Self Diagnostic Test | White | Black | | |
| | LEDEL2SDTB | LED Emergency Lighting Remote Head Double, Self Diagnostic Test | White | Black | | |
| | LEDEL1SDTWLB | LED Emergency Lighting Single Remote Head Wet Location, Self Diagnostic Test | White | Black | | |
| | LEDEL2SDTWLB | LED Emergency Lighting Double Remote Head Wet Location, Self Diagnostic Test | White | Black | | |

