

DESCRIPTION

The Lumark Nighthawk III utilizes a soft-cornered aerodynamic design to provide excellent EPA ratings and an aesthetically pleasing appearance. Dark bronze polyester powder coat finish assures corrosion resistance and long-lasting aesthetics. U.L. listed and CSA certified for wet locations. The Nighthawk III uses an innovative die-cut optical design which delivers maximum beam control for storage areas, rail yards, loading docks and building perimeters.

Catalog #	Type
Project	
Comments	Date
Prepared by	

SPECIFICATION FEATURES

Construction

LATCHES: Formed aluminum flush draw-action latches offer easy access to lamp compartment without tools and maintain integrity of seal when closed.
HOUSING: Aerodynamically designed die-cast aluminum housing has low EPA rating.
DOOR: Die-cast aluminum with integral cast hinges for removal without tools.
GASKET: Door gasket is foam-in-place silicone, providing maximum protection of interior components from the elements.

Electrical

BALLAST: Ballast components are hard mounted to fixture housing for maximum heat dissipation and extended component and lamp life.

Optical

LENS: Heat- and impact-resistant tempered glass. Lens is mounted flush with door surface to reduce wind drag and prevent dirt or moisture from accumulating.
REFLECTOR: Computer designed die-cut reflector system delivers superior beam control and efficiency.

Mounting

Slipfitter: Die-cast aluminum integral slipfitter mounts on nominal 2 3/8" or 3" O.D. tenons. A degree-marked quadrant is cast in for easy and accurate aiming.
Yoke: Heavy-duty steel yoke provides flexibility in mounting from a variety of surfaces.
Trunnion: Die-formed steel trunnion is easily adapted to many areas and allows easy fixture aiming.



NK NIGHTHAWK III

150 - 1000W

Pulse Start Metal Halide


Metal Halide

High Pressure Sodium


SLIPFITTER-, YOKE-, TRUNNION-MOUNT FLOODLIGHT

DIMENSIONS


SLIPFITTER-MOUNT




YOKE-MOUNT



TRUNNION-MOUNT



DRILLING PATTERN FOR YOKE- AND TRUNNION-MOUNT

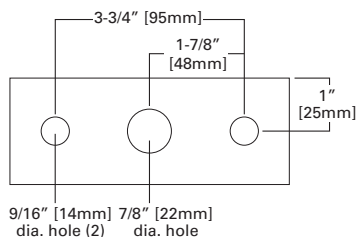

LAMP TYPE	WATTAGE
Pulse Start Metal Halide (MP)	150, 250, 320, 400, 450, 750, 1000W
Metal Halide (MH)	175, 250, 400, 750, 1000W
High Pressure Sodium (HP)	150, 250, 400, 600, 750, 1000W

TECHNICAL DATA

U.L. Wet Location Listed
 CSA Certified
 EISA Compliant ©


EPA

Effective Projected Area: 2.7


SHIPPING DATA

Approximate Net Weight:
 59 lbs. (27 kgs.)


PHOTOMETRICS

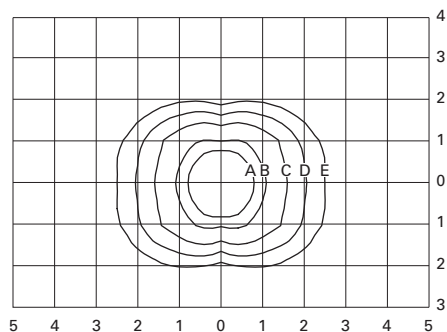


HPNK-X76-400
400-Watt HP
50,000-Lumen Clear Lamp

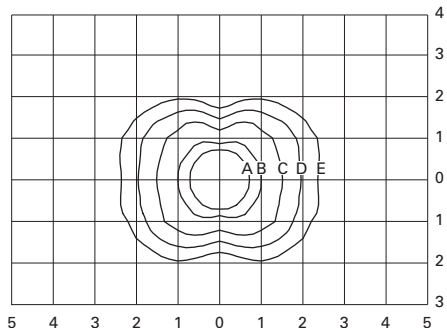

MPNK-X76-400
400-Watt MP
42,000-Lumen Clear Lamp

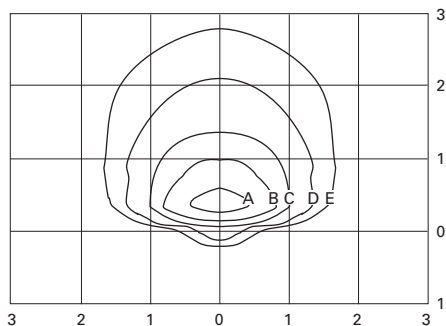

HPNK-X76-1000
1000-Watt HP
140,000-Lumen Clear Lamp

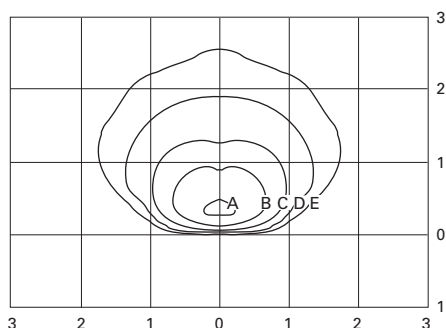

MHNK-X76-1000
1000-Watt MH
110,000-Lumen Clear Lamp

Footcandle Table

Select mounting height and read across for footcandle values of each isofootcandle line. Distance in units of mounting height.

Mounting Height	Footcandle Values for Isofootcandle Lines				
	A	B	C	D	E
400W					
20'	10.00	5.00	2.00	1.00	0.50
25'	6.40	3.20	1.28	0.64	0.32
30'	4.44	2.22	0.89	0.44	0.22
35'	3.27	1.63	0.65	0.33	0.16
40'	2.50	1.25	0.50	0.25	0.13

1000W

30'	20.00	10.00	5.00	2.00	1.00
35'	14.69	7.35	3.67	1.47	0.73
40'	11.25	5.63	2.81	1.13	0.56
45'	8.89	4.44	2.22	0.89	0.44
50'	7.20	3.60	1.80	0.72	0.36

EPA Ratings:

Fixture Angle	Wind Direction (sq. ft.)	
	Front	Side
45° from Horizontal	2.7	1.2
90° from Horizontal	4.2	1.2
0° from Horizontal	1.1	1.2

ORDERING INFORMATION

Sample Number: MPNK-S76-400-277V

Lamp Type MP =Pulse Start Metal Halide MH =Metal Halide ¹ HP =High Pressure Sodium	Mounting S =Slipfitter T =Trunnion Y =Yoke	Lamp Wattage ¹ MP 150 =150W 250 =250W 320 =320W 400 =400W 450 = 450W 750 = 750W 1000 = 1000W MH 175 = 175W ¹ 250 = 250W ¹ 400 = 400W ¹ 750 = 750W 1000 = 1000W HP 150 = 150W 250 = 250W 400 = 400W 600 = 600W 750 = 750W 1000 = 1000W	Voltage ² 120V =120V 208V =208V 240V =240V 277V =277V 347V = 347V ³ 480V = 480V MT = Multi-Tap, wired 277V TT = Triple-Tap, ³ wired 347V	Options ⁴ F1 =Single Fuse (120, 277 or 347V only) F2 =Double Fuse (208, 240 or 480V only) Q =Quartz Restrike (Hot Strike Only) EM =Quartz Restrike with "Delay Relay" (Quartz lamp strikes at both hot and cold starts) LL : Lamp Included ⁶ CEC = California Title 20 Compliant Ballast (Applies to 250-320W and 400W MP only) PER = NEMA Twistlock Photocontrol Receptacle PC = Button Type Photocontrol ⁷ T = Removable Quick-Disconnect ⁵ Power Tray	Accessories ⁸ TYS-XX =Trunnion or Yoke Slipfitter for 2 3/8", 3", or 3 1/2" ⁹ O.D. Tenon VS/NK =Vandal Shield for 150 - 320W WG/NK =Wire Guard VS/NK/1000 =Vandal Shield for 400 - 1000W Units OA/RA1016 = Photoelectric Control, 105-285 Volt NEMA Type OA/RA1201 = Photoelectric Control, 347V NEMA Type OA/RA1027 = Photoelectric Control, 480V NEMA Type OA1028 = Field Installed NEMA Twistlock Photocontrol Receptacle (Order Photocontrol Separately) TV/NK-XX = Top or Bottom Visor SV1/NK-XX = Single Side Visor SV/NK-XX = Double Side Visor OA/RA1013 = Shorting Cap
--	---	--	--	---	--

Standard Color
_ = Bronze (Standard)
BLK= Black
GRY= Grey
WHT=White

- Notes:**
- 1 175W, 250W, and 400W MH available in non-U.S. markets only.
 - 2 Products also available in non-US voltages and 50HZ for international markets.
 - 3 88% efficient EISA Compliant fixtures not available in 347V or TT Voltages. TT not available with 750W HPS - Specify Voltage.
 - 4 Add as suffix in the order shown.
 - 5 Not available in 1000W.
 - 6 Lamp is shipped separate from luminaire. Lamp is Cooper designated product based on luminaire requirements. Specified lamps must be ordered as a separate line item.
 - 7 PC option not available with trunnion or yoke mount.
 - 8 Order separately, replace XX with color designation.
 - 9 Not available with slipfitter-mount.

STOCK SAMPLE NUMBER: (LAMP INCLUDED)

SAMPLE NUMBER: MPNKS40

Lamp Type MP =Pulse Start Metal Halide MH =Metal Halide HP =High Pressure Sodium	NK Series NK =Nighthawk III ¹	Mounting S =Slipfitter Y =Yoke	Lamp Wattage 40 =400W ² 1K =1000W ³	TYS Accessories (order separately) TYS =Trunnion or Yoke Slipfitter for 2 3/8", 3", or 3 1/2" O.D. Tenon
---	---	---	--	---

NOTES [stock]:

- 1 Multi-tap ballast, 7Hx6V beam spread, bronze finish, and lamp are standard for stock product.
 - 2 400W available in MP only.
 - 3 1K available in MH and HPS only.
- Refer to In Stock Guide for availability.

VOLTAGE CHART

MT=Multi-Tap 120/208/240/277V (wired 277V)

TT=Triple-Tap 120/277/347V (wired 347V)

DESCRIPTION

The Lumark Nighthawk III utilizes a soft-cornered aerodynamic design to provide excellent EPA ratings and an aesthetically pleasing appearance. Dark bronze polyester powder coat finish assures corrosion resistance and long-lasting aesthetics. U.L. listed and CSA certified for wet locations. The Nighthawk III uses an innovative die-cut optical design which delivers maximum beam control for storage areas, rail yards, loading docks and building perimeters.

Catalog #	Type
Project	
Comments	Date
Prepared by	

SPECIFICATION FEATURES

Construction

LATCHES: Formed aluminum flush draw-action latches offer easy access to lamp compartment without tools and maintain integrity of seal when closed.
HOUSING: Aerodynamically designed die-cast aluminum housing has low EPA rating.
DOOR: Die-cast aluminum with integral cast hinges for removal without tools.
GASKET: Door gasket is foam-in-place silicone, providing maximum protection of interior components from the elements.

Electrical

BALLAST: Ballast components are hard mounted to fixture housing for maximum heat dissipation and extended component and lamp life.

Optical

LENS: Heat- and impact-resistant tempered glass. Lens is mounted flush with door surface to reduce wind drag and prevent dirt or moisture from accumulating.
REFLECTOR: Computer designed die-cut reflector system delivers superior beam control and efficiency.

Mounting

Slipfitter: Die-cast aluminum integral slipfitter mounts on nominal 2 3/8" or 3" O.D. tenons. A degree-marked quadrant is cast in for easy and accurate aiming.
Yoke: Heavy-duty steel yoke provides flexibility in mounting from a variety of surfaces.
Trunnion: Die-formed steel trunnion is easily adapted to many areas and allows easy fixture aiming.



NK NIGHTHAWK III

150 - 1000W

Pulse Start Metal Halide


Metal Halide

High Pressure Sodium


SLIPFITTER-, YOKE-, TRUNNION-MOUNT FLOODLIGHT

DIMENSIONS


SLIPFITTER-MOUNT




YOKE-MOUNT



TRUNNION-MOUNT



DRILLING PATTERN FOR YOKE- AND TRUNNION-MOUNT

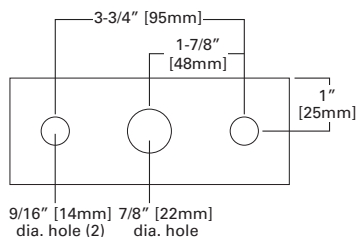

LAMP TYPE	WATTAGE
Pulse Start Metal Halide (MP)	150, 250, 320, 400, 450, 750, 1000W
Metal Halide (MH)	175, 250, 400, 750, 1000W
High Pressure Sodium (HP)	150, 250, 400, 600, 750, 1000W

TECHNICAL DATA

U.L. Wet Location Listed
 CSA Certified
 EISA Compliant ©


EPA

Effective Projected Area: 2.7


SHIPPING DATA

Approximate Net Weight:
 59 lbs. (27 kgs.)


PHOTOMETRICS

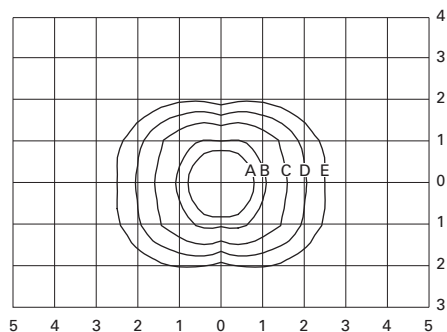


HPNK-X76-400
400-Watt HP
50,000-Lumen Clear Lamp

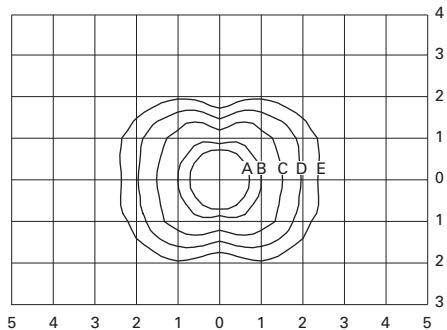

MPNK-X76-400
400-Watt MP
42,000-Lumen Clear Lamp

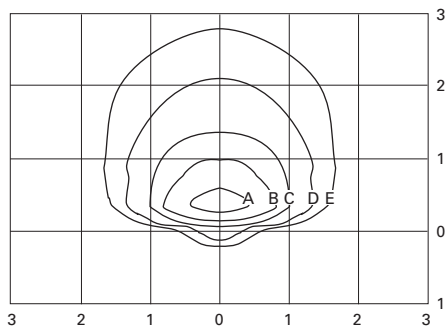

HPNK-X76-1000
1000-Watt HP
140,000-Lumen Clear Lamp

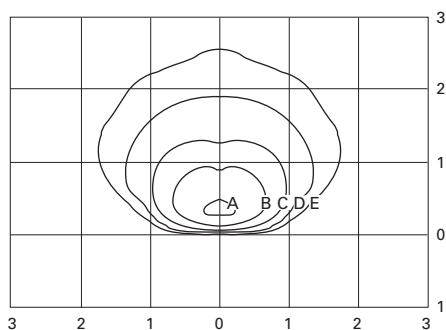

MHNK-X76-1000
1000-Watt MH
110,000-Lumen Clear Lamp

Footcandle Table

Select mounting height and read across for footcandle values of each isofootcandle line. Distance in units of mounting height.

Mounting Height	Footcandle Values for Isofootcandle Lines				
	A	B	C	D	E
400W					
20'	10.00	5.00	2.00	1.00	0.50
25'	6.40	3.20	1.28	0.64	0.32
30'	4.44	2.22	0.89	0.44	0.22
35'	3.27	1.63	0.65	0.33	0.16
40'	2.50	1.25	0.50	0.25	0.13

1000W

30'	20.00	10.00	5.00	2.00	1.00
35'	14.69	7.35	3.67	1.47	0.73
40'	11.25	5.63	2.81	1.13	0.56
45'	8.89	4.44	2.22	0.89	0.44
50'	7.20	3.60	1.80	0.72	0.36

EPA Ratings:

Fixture Angle	Wind Direction (sq. ft.)	
	Front	Side
45° from Horizontal	2.7	1.2
90° from Horizontal	4.2	1.2
0° from Horizontal	1.1	1.2

ORDERING INFORMATION

Sample Number: MPNK-S76-400-277V

Lamp Type MP =Pulse Start Metal Halide MH =Metal Halide ¹ HP =High Pressure Sodium	Mounting S =Slipfitter T =Trunnion Y =Yoke	Lamp Wattage ¹ MP 150 =150W 250 =250W 320 =320W 400 =400W 450 = 450W 750 = 750W 1000 = 1000W MH 175 = 175W ¹ 250 = 250W ¹ 400 = 400W ¹ 750 = 750W 1000 = 1000W HP 150 = 150W 250 = 250W 400 = 400W 600 = 600W 750 = 750W 1000 = 1000W	Voltage ² 120V =120V 208V =208V 240V =240V 277V =277V 347V = 347V ³ 480V = 480V MT = Multi-Tap, wired 277V TT = Triple-Tap, ³ wired 347V	Options ⁴ F1 =Single Fuse (120, 277 or 347V only) F2 =Double Fuse (208, 240 or 480V only) Q =Quartz Restrike (Hot Strike Only) EM =Quartz Restrike with "Delay Relay" (Quartz lamp strikes at both hot and cold starts) LL : Lamp Included ⁶ CEC = California Title 20 Compliant Ballast (Applies to 250-320W and 400W MP only) PER = NEMA Twistlock Photocontrol Receptacle PC = Button Type Photocontrol ⁷ T = Removable Quick-Disconnect ⁵ Power Tray	Accessories ⁸ TYS-XX =Trunnion or Yoke Slipfitter for 2 3/8", 3", or 3 1/2" ⁹ O.D. Tenon VS/NK =Vandal Shield for 150 - 320W WG/NK =Wire Guard VS/NK/1000 =Vandal Shield for 400 - 1000W Units OA/RA1016 = Photoelectric Control, 105-285 Volt NEMA Type OA/RA1201 = Photoelectric Control, 347V NEMA Type OA/RA1027 = Photoelectric Control, 480V NEMA Type OA1028 = Field Installed NEMA Twistlock Photocontrol Receptacle (Order Photocontrol Separately) TV/NK-XX = Top or Bottom Visor SV1/NK-XX = Single Side Visor SV/NK-XX = Double Side Visor OA/RA1013 = Shorting Cap
--	---	--	--	---	--

Standard Color
_ = Bronze (Standard)
BLK= Black
GRY= Grey
WHT=White

- Notes:**
- 1 175W, 250W, and 400W MH available in non-U.S. markets only.
 - 2 Products also available in non-US voltages and 50HZ for international markets.
 - 3 88% efficient EISA Compliant fixtures not available in 347V or TT Voltages. TT not available with 750W HPS - Specify Voltage.
 - 4 Add as suffix in the order shown.
 - 5 Not available in 1000W.
 - 6 Lamp is shipped separate from luminaire. Lamp is Cooper designated product based on luminaire requirements. Specified lamps must be ordered as a separate line item.
 - 7 PC option not available with trunnion or yoke mount.
 - 8 Order separately, replace XX with color designation.
 - 9 Not available with slipfitter-mount.

STOCK SAMPLE NUMBER: (LAMP INCLUDED)

SAMPLE NUMBER: MPNKS40

Lamp Type MP =Pulse Start Metal Halide MH =Metal Halide HP =High Pressure Sodium	NK Series NK =Nighthawk III ¹	Mounting S =Slipfitter Y =Yoke	Lamp Wattage 40 =400W ² 1K =1000W ³	TYS Accessories (order separately) TYS =Trunnion or Yoke Slipfitter for 2 3/8", 3", or 3 1/2" O.D. Tenon
---	---	---	--	---

NOTES [stock]:

- 1 Multi-tap ballast, 7Hx6V beam spread, bronze finish, and lamp are standard for stock product.
 - 2 400W available in MP only.
 - 3 1K available in MH and HPS only.
- Refer to In Stock Guide for availability.

VOLTAGE CHART

MT=Multi-Tap 120/208/240/277V (wired 277V)

TT=Triple-Tap 120/277/347V (wired 347V)