

## FEATURES & SPECIFICATIONS

**INTENDED USE** — Ideal for task lighting, restrooms, under/over cabinet, storage closets and displays. Certain airborne contaminants can diminish the integrity of acrylic and/or polycarbonate. [Click here for Acrylic-Polycarbonate Compatibility table for suitable uses.](#)

**CONSTRUCTION** — Lightweight compact-designed channel and cover are formed from cold-rolled steel and painted after fabrication.

Finish: High-gloss, baked white enamel (standard).

**OPTICS** — LEDs provide 88 color rendering index (CRI) at 4000 Kelvin with lumen output of 2,100 lumens. Diffuse acrylic lens providing a single smooth line of light shaped to resemble a fluorescent tube.

**ELECTRICAL** — 80% lumen maintenance at 60,000 hours; predicted life of more than 50,000 hours.

**INSTALLATION** — Snap-lock tool-less channel cover for quick and easy installation on ceiling or wall (horizontally or vertically). Not designed for continuous row mounting or daisy chaining.

**LISTINGS** — UL/C-UL listed to US and Canadian Safety Standards. For use in ambient temperatures from -22°F (-30°C) to 77°F (25°C). Approved FCC Part 15 Class B.

**WARRANTY** — 5-year limited warranty. Complete warranty terms located at: [www.acuitybrands.com/CustomResources/Terms\\_and\\_conditions.aspx](http://www.acuitybrands.com/CustomResources/Terms_and_conditions.aspx)

**Note:** Actual performance may differ as a result of end-user environment and application.

All values are design or typical values, measured under laboratory conditions at 25 °C.

Specifications subject to change without notice.

Catalog Number
Notes
Type

Contractor Select

# LED Dry Location Striplight




### Specifications

All dimensions are shown in inches (centimeters) unless otherwise noted.

LUMENS	LENGTH	WIDTH	DEPTH	WEIGHT	COMPARABLE LIGHT SOURCE
2100	46-1/2 (118.1)	1-1/2 (3.8)	2 (5.1)	3.96 lbs (1.8 kg)	1 - 32W T8

### ORDERING INFORMATION

Catalog number	UPC	Description	Lumens	Wattage	Voltage	Color temperature	Pallet Quantity	Standard Carton Quantity
MNSL MV M6	7535739545437	LED dry location striplight	2100	24	120 - 277	4000K, 88 CRI	504	1

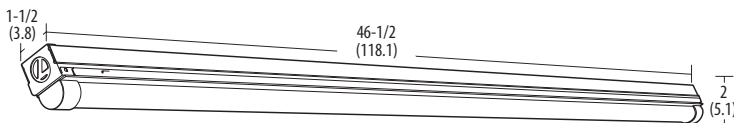

## FEATURES & SPECIFICATIONS

**INTENDED USE** — Ideal for task lighting, restrooms, under/over cabinet, storage closets and displays. Certain airborne contaminants can diminish the integrity of acrylic and/or polycarbonate. [Click here for Acrylic-Polycarbonate Compatibility table for suitable uses.](#)

**CONSTRUCTION** — Lightweight compact-designed channel and cover are formed from cold-rolled steel and painted after fabrication.

Finish: High-gloss, baked white enamel (standard).

**OPTICS** — LEDs provide 88 color rendering index (CRI) at 4000 Kelvin with lumen output of 2,100 lumens. Diffuse acrylic lens providing a single smooth line of light shaped to resemble a fluorescent tube.

**ELECTRICAL** — 80% lumen maintenance at 60,000 hours; predicted life of more than 50,000 hours.

**INSTALLATION** — Snap-lock tool-less channel cover for quick and easy installation on ceiling or wall (horizontally or vertically). Not designed for continuous row mounting or daisy chaining.

**LISTINGS** — UL/C-UL listed to US and Canadian Safety Standards. For use in ambient temperatures from -22°F (-30°C) to 77°F (25°C). Approved FCC Part 15 Class B.

**WARRANTY** — 5-year limited warranty. Complete warranty terms located at: [www.acuitybrands.com/CustomerResources/Terms\\_and\\_conditions.aspx](http://www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx)

**Note:** Actual performance may differ as a result of end-user environment and application.

All values are design or typical values, measured under laboratory conditions at 25 °C.

Specifications subject to change without notice.

Catalog Number
Notes
Type

Contractor Select

# LED Dry Location Striplight



### Specifications

All dimensions are shown in inches (centimeters) unless otherwise noted.

LUMENS	LENGTH	WIDTH	DEPTH	WEIGHT	COMPARABLE LIGHT SOURCE
2100	46-1/2 (118.1)	1-1/2 (3.8)	2 (5.1)	3.96 lbs (1.8 kg)	1 - 32W T8

### ORDERING INFORMATION

Catalog number	UPC	Description	Lumens	Wattage	Voltage	Color temperature	Pallet Quantity	Standard Carton Quantity
MNSL MV M6	7535739545437	LED dry location striplight	2100	24	120 - 277	4000K, 88 CRI	504	1

