



**More light levels to meet the demands of every end user and installer.**

NTL885TR, NTL873\*CC, NTLFULL, NTLHORZ

Installing extra nighttime convenience, control and safety is made simple with Legrand's full line of radiant® night light devices. These night lights easily replace any standard receptacle and offer adjustable light levels, as well as an optional louver for even greater light-level control. And now as part of the radiant® collection, they offer a better fit, form and finish in every hallway, kitchen or nursery.

## Features & Benefits

- **Two tamper-resistant outlets** — an industry exclusive.



**Now with black "invisi-shutters"** for an invisible effect preferred by end users.

**NTL885TRWCC6**

- **Part of the radiant® collection.**
- **Five adjustable light settings** including OFF.
- **Hidden sensor automatically controls night lights.**
- **Replace any standard receptacle.**
- **Ideal for hallways, kitchens and nurseries.**
- **NTL885TR\*, NTLFULL\***
- **Optional louver included** for added light-level control.

## Compliance

 **cULus listed.** Conform to NEMA WD-1 and WD-6.

## Technical Information

### Performance

#### Electrical

|                              |      |
|------------------------------|------|
| Maximum Working Voltage      | 125V |
| Maximum Current Interrupting | 15A  |
| Maximum Temperature Rise     | 30°C |

#### Mechanical


|                         |                                                                                                                              |
|-------------------------|------------------------------------------------------------------------------------------------------------------------------|
| Terminal Identification | Terminal identification in accordance with UL20                                                                              |
| Terminal Accommodation  | Back and side wire terminals accommodate #12 and #14 AWG stranded and copper wire<br>Push wire terminals accommodate #14 AWG |
| Product Identification  | Ratings are a permanent part of the device                                                                                   |

#### Environmental

|              |                     |
|--------------|---------------------|
| Flammability | UL20 minimum rating |
|--------------|---------------------|

### Materials

|                           |                                                          |
|---------------------------|----------------------------------------------------------|
| Face                      | Thermoplastic                                            |
| Back Body                 | Thermoplastic                                            |
| Line Contacts             | .031 Brass                                               |
| Mounting Strap            | .042 Zinc-Plated Steel                                   |
| Tamper-Resistant Shutters | Thermoplastic                                            |
| Terminal Screws           | #8 Tri-Drive Steel (Neutral = Nickel-Plated Steel)       |
| Ground Screw              | #8 Hex Tri-Drive Steel; Zinc Coating with Green Chromate |
| Mounting Screws           | Steel plated                                             |

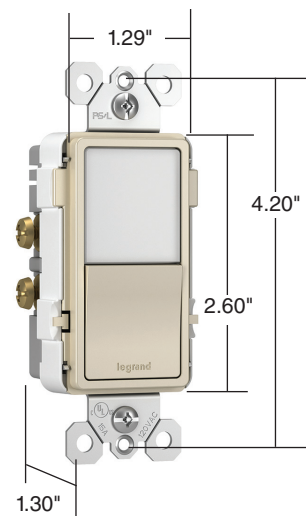

**NTL873LACC6**



**NTLFULL**



**NTLHORZ**

### Warranty

1 Year

## Ordering Information

### Night Light with Two 15A Tamper-Resistant Receptacles and Adjustable Light Levels with optional louver included

| Catalog Number | Rating |         | Color        | NEMA Config. No. | 3rd Party Compliance<br>cULus |
|----------------|--------|---------|--------------|------------------|-------------------------------|
|                | A      | VAC     |              |                  |                               |
| NTL885TRICC6   | 15     | 120/125 | Ivory        | 5-15R            | •                             |
| NTL885TRWCC6   | 15     | 120/125 | White        | 5-15R            | •                             |
| NTL885TRLACC6  | 15     | 120/125 | Light Almond | 5-15R            | •                             |
| NTL885TRBKCC6  | 15     | 120/125 | Black        | 5-15R            | •                             |
| NTL885TRNICC6  | 15     | 120/125 | Nickel       | 5-15R            | •                             |

### Night Light with Single Pole/3-Way Switch

| Catalog Number | Rating |         | Color        | 3rd Party Compliance<br>cULus |
|----------------|--------|---------|--------------|-------------------------------|
|                | A      | VAC     |              |                               |
| NTL873ICC6     | 15     | 120/125 | Ivory        | •                             |
| NTL873WCC6     | 15     | 120/125 | White        | •                             |
| NTL873LACC6    | 15     | 120/125 | Light Almond | •                             |
| NTL873BKCC6    | 15     | 120/125 | Black        | •                             |
| NTL873NICC6    | 15     | 120/125 | Nickel       | •                             |

### Full Night Light, Adjustable Light Levels, Tri-Color with optional louver included\*

|              |         |                                |   |
|--------------|---------|--------------------------------|---|
| NTLFULLTCCC6 | 120/125 | Ivory<br>Light Almond<br>Black | • |
| NTLHORZTCCC6 | 120/125 | Ivory<br>Light Almond<br>Black | • |

### Full Night Light, Adjustable Light Levels with optional louver included\*

|             |         |       |   |
|-------------|---------|-------|---|
| NTLFULLWCC6 | 120/125 | White | • |
| NTLHORZWCC6 | 120/125 | White | • |

\*NTLHORZTCCC6 and NTLHORZWCC6 only used with louver.

## 2 Pole, 3 Wire



NEMA  
5-15R

---

## Vertical Markets

- Office
- Residential
- Multiple Dwelling
- Hospitality/Lodging

---

## Also available in the radiant® collection

- GFCI Receptacles
- Standard & Tamper-Resistant Receptacles
- Paddle Switches
- Lighting & Fan Controls
- Timers
- Combination Devices
- USB Charging Devices
- Screwless Wall Plates
- Sensors
- Home Automation Controls

---

 The paper used to print this document is an environmentally responsible paper with 10% post consumer waste, with FSC and SFI Chain of Custody certifications, Lacey Act compliant. 100% of the electricity used to manufacture Flo sheets is generated with Green-e certified renewable energy.

All brand and product names referenced in this document are registered trademarks or trademarks of their respective holders.



**Legrand, North America**  
60 Woodlawn Street  
West Hartford, CT 06110  
1.877.BY.LEGRAND (295.3472)  
[www.legrand.us](http://www.legrand.us)  
570 Applewood Crescent  
Vaughan, Ontario L4K 4B4  
905.738.9195  
[www.legrand.ca](http://www.legrand.ca)

FOLLOW US





**More light levels to meet the demands of every end user and installer.**

NTL885TR, NTL873\*CC, NTLFULL, NTLHORZ

Installing extra nighttime convenience, control and safety is made simple with Legrand's full line of radiant® night light devices. These night lights easily replace any standard receptacle and offer adjustable light levels, as well as an optional louver for even greater light-level control. And now as part of the radiant® collection, they offer a better fit, form and finish in every hallway, kitchen or nursery.

## Features & Benefits

- **Two tamper-resistant outlets** — an industry exclusive.



Now with black "invisi-shutters" for an invisible effect preferred by end users.

**NTL885TRWCC6**

- Part of the radiant® collection.
- Five adjustable light settings including OFF.
- Hidden sensor automatically controls night lights.
- Replace any standard receptacle.
- Ideal for hallways, kitchens and nurseries.
- NTL885TR\*, NTLFULL\*
- Optional louver included for added light-level control.

## Compliance

 cULus listed. Conform to NEMA WD-1 and WD-6.

## Technical Information

### Performance

#### Electrical

|                              |      |
|------------------------------|------|
| Maximum Working Voltage      | 125V |
| Maximum Current Interrupting | 15A  |
| Maximum Temperature Rise     | 30°C |

#### Mechanical


|                         |                                                                                                                              |
|-------------------------|------------------------------------------------------------------------------------------------------------------------------|
| Terminal Identification | Terminal identification in accordance with UL20                                                                              |
| Terminal Accommodation  | Back and side wire terminals accommodate #12 and #14 AWG stranded and copper wire<br>Push wire terminals accommodate #14 AWG |
| Product Identification  | Ratings are a permanent part of the device                                                                                   |

#### Environmental

|              |                     |
|--------------|---------------------|
| Flammability | UL20 minimum rating |
|--------------|---------------------|

### Materials

|                           |                                                          |
|---------------------------|----------------------------------------------------------|
| Face                      | Thermoplastic                                            |
| Back Body                 | Thermoplastic                                            |
| Line Contacts             | .031 Brass                                               |
| Mounting Strap            | .042 Zinc-Plated Steel                                   |
| Tamper-Resistant Shutters | Thermoplastic                                            |
| Terminal Screws           | #8 Tri-Drive Steel (Neutral = Nickel-Plated Steel)       |
| Ground Screw              | #8 Hex Tri-Drive Steel; Zinc Coating with Green Chromate |
| Mounting Screws           | Steel plated                                             |

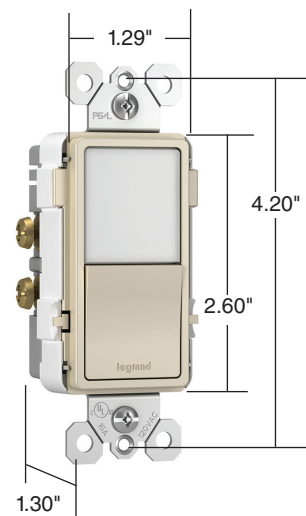

**NTL873LACC6**



**NTLFULL**



**NTLHORZ**

### Warranty

1 Year

## Ordering Information

### Night Light with Two 15A Tamper-Resistant Receptacles and Adjustable Light Levels with optional louver included

| Catalog Number | Rating |         | Color        | NEMA Config. No. | 3rd Party Compliance |
|----------------|--------|---------|--------------|------------------|----------------------|
|                | A      | VAC     |              |                  | cUL <sub>US</sub>    |
| NTL885TRICC6   | 15     | 120/125 | Ivory        | 5-15R            | •                    |
| NTL885TRWCC6   | 15     | 120/125 | White        | 5-15R            | •                    |
| NTL885TRLACC6  | 15     | 120/125 | Light Almond | 5-15R            | •                    |
| NTL885TRBKCC6  | 15     | 120/125 | Black        | 5-15R            | •                    |
| NTL885TRNICC6  | 15     | 120/125 | Nickel       | 5-15R            | •                    |

### Night Light with Single Pole/3-Way Switch

| Catalog Number | Rating |         | Color        | 3rd Party Compliance |
|----------------|--------|---------|--------------|----------------------|
|                | A      | VAC     |              | cUL <sub>US</sub>    |
| NTL873ICC6     | 15     | 120/125 | Ivory        | •                    |
| NTL873WCC6     | 15     | 120/125 | White        | •                    |
| NTL873LACC6    | 15     | 120/125 | Light Almond | •                    |
| NTL873BKCC6    | 15     | 120/125 | Black        | •                    |
| NTL873NICC6    | 15     | 120/125 | Nickel       | •                    |

### Full Night Light, Adjustable Light Levels, Tri-Color with optional louver included\*


|              |         |                                |   |
|--------------|---------|--------------------------------|---|
| NTLFULLTCCC6 | 120/125 | Ivory<br>Light Almond<br>Black | • |
| NTLHORZTCCC6 | 120/125 | Ivory<br>Light Almond<br>Black | • |

### Full Night Light, Adjustable Light Levels with optional louver included\*

|             |         |       |   |
|-------------|---------|-------|---|
| NTLFULLWCC6 | 120/125 | White | • |
| NTLHORZWCC6 | 120/125 | White | • |

\*NTLHORZTCCC6 and NTLHORZWCC6 only used with louver.

## 2 Pole, 3 Wire



---

## Vertical Markets

- Office
- Residential
- Multiple Dwelling
- Hospitality/Lodging

---

## Also available in the radiant® collection

- GFCI Receptacles
- Standard & Tamper-Resistant Receptacles
- Paddle Switches
- Lighting & Fan Controls
- Timers
- Combination Devices
- USB Charging Devices
- Screwless Wall Plates
- Sensors
- Home Automation Controls

---

 The paper used to print this document is an environmentally responsible paper with 10% post consumer waste, with FSC and SFI Chain of Custody certifications, Lacey Act compliant. 100% of the electricity used to manufacture Flo sheets is generated with Green-e certified renewable energy.

All brand and product names referenced in this document are registered trademarks or trademarks of their respective holders.



**Legrand, North America**  
60 Woodlawn Street  
West Hartford, CT 06110  
1.877.BY.LEGRAND (295.3472)  
[www.legrand.us](http://www.legrand.us)  
570 Applewood Crescent  
Vaughan, Ontario L4K 4B4  
905.738.9195  
[www.legrand.ca](http://www.legrand.ca)

FOLLOW US

