






Atlanta, Georgia

Phone 800-521-7326

Fax 770-745-1333

www.pecofasteners.com

## Bugle Head Coarse Thread Drywall Screws (Black Phosphate Finish)

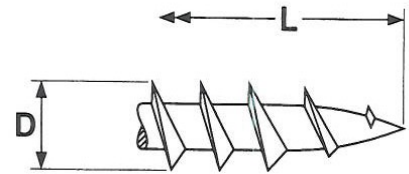

| Peco<br>Catalog#                    | Screw Size                                                        | Threads Per Inch | Driver<br>Size | D                  |                   | A    |      | H    |      | R    |      | I    |      |
|-------------------------------------|-------------------------------------------------------------------|------------------|----------------|--------------------|-------------------|------|------|------|------|------|------|------|------|
|                                     |                                                                   |                  |                | Min Diameter       | Max Diameter      | Min  | Max  | Min  | Max  | Min  | Max  | Min  | Max  |
| See Section 1<br>of Peco<br>Catalog | 6                                                                 | 8                | 2              | .142               | .154              | .315 | .347 | .020 | .031 | .176 | .189 | .087 | .110 |
|                                     | 7                                                                 | 8                | 2              | .159               | .172              | .322 | .355 | .020 | .035 | .191 | .206 | .102 | .125 |
|                                     | 8                                                                 | 8                | 2              | .163               | .180              | .330 | .363 | .020 | .039 | .201 | .214 | .112 | .135 |
|                                     | 10                                                                | 8                | 2              | .180               | .210              | .344 | .379 | .020 | .045 | .208 | .222 | .137 | .142 |
| Tolerance on Length                 |                                                                   |                  |                | Up to 1" 0, +0.060 | Over 1" 0, +0.100 |      |      |      |      |      |      |      |      |
| Material                            | AISI 1018 or Equivalent Steel                                     |                  |                |                    |                   |      |      |      |      |      |      |      |      |
| Hardness                            | Rockwell C 44 minimum                                             |                  |                |                    |                   |      |      |      |      |      |      |      |      |
| Heat Treatment                      | Quenched in liquid and then tempered by reheating to 650° Minimum |                  |                |                    |                   |      |      |      |      |      |      |      |      |

Peco Fasteners specification sheets are a reference guide to help in the selection of fasteners. Peco has made every effort to ensure the accuracy of the information. However, Peco Fasteners is not responsible for any errors that may be contained within these sheets. Peco Fasteners makes no claim of warranty in the accuracy of this information. Users of this information are solely responsible for protecting themselves against liability. It is solely the responsibility of the purchasers and users of these fasteners to consult with Engineers that are experts in an applicable field. Peco Fasteners is not responsible for any loss, claim, or damage due to these specification sheets.






Atlanta, Georgia

Phone 800-521-7326

Fax 770-745-1333

www.pecofasteners.com

## Bugle Head Coarse Thread Drywall Screws (Black Phosphate Finish)

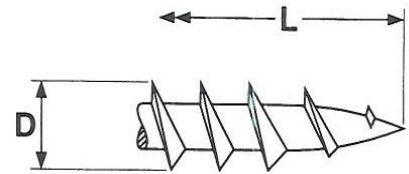

| Peco<br>Catalog#                    | Screw Size                                                        | Threads Per Inch | Driver<br>Size | D                  |                   | A    |      | H    |      | R    |      | I    |      |
|-------------------------------------|-------------------------------------------------------------------|------------------|----------------|--------------------|-------------------|------|------|------|------|------|------|------|------|
|                                     |                                                                   |                  |                | Min Diameter       | Max Diameter      | Min  | Max  | Min  | Max  | Min  | Max  | Min  | Max  |
| See Section 1<br>of Peco<br>Catalog | 6                                                                 | 8                | 2              | .142               | .154              | .315 | .347 | .020 | .031 | .176 | .189 | .087 | .110 |
|                                     | 7                                                                 | 8                | 2              | .159               | .172              | .322 | .355 | .020 | .035 | .191 | .206 | .102 | .125 |
|                                     | 8                                                                 | 8                | 2              | .163               | .180              | .330 | .363 | .020 | .039 | .201 | .214 | .112 | .135 |
|                                     | 10                                                                | 8                | 2              | .180               | .210              | .344 | .379 | .020 | .045 | .208 | .222 | .137 | .142 |
| Tolerance on Length                 |                                                                   |                  |                | Up to 1" 0, +0.060 | Over 1" 0, +0.100 |      |      |      |      |      |      |      |      |
| Material                            | AISI 1018 or Equivalent Steel                                     |                  |                |                    |                   |      |      |      |      |      |      |      |      |
| Hardness                            | Rockwell C 44 minimum                                             |                  |                |                    |                   |      |      |      |      |      |      |      |      |
| Heat Treatment                      | Quenched in liquid and then tempered by reheating to 650° Minimum |                  |                |                    |                   |      |      |      |      |      |      |      |      |

Peco Fasteners specification sheets are a reference guide to help in the selection of fasteners. Peco has made every effort to ensure the accuracy of the information. However, Peco Fasteners is not responsible for any errors that may be contained within these sheets. Peco Fasteners makes no claim of warranty in the accuracy of this information. Users of this information are solely responsible for protecting themselves against liability. It is solely the responsibility of the purchasers and users of these fasteners to consult with Engineers that are experts in an applicable field. Peco Fasteners is not responsible for any loss, claim, or damage due to these specification sheets.