



Industry-leading efficacy, incredible value. The low-cost floodlight family just upped its game. PIPXL™ - up to 16,600 lumens and 100W of affordable LED light.

Color: Bronze Weight: 20.6 lbs

|              |       |
|--------------|-------|
| Project:     | Type: |
| Prepared By: | Date: |

| Driver Info |                  | LED Info       |              |
|-------------|------------------|----------------|--------------|
| Type        | Constant Current | Watts          | 70W          |
| 120V        | 0.60A            | Color Temp     | 5000K (Cool) |
| 208V        | 0.34A            | Color Accuracy | 74 CRI       |
| 240V        | 0.30A            | L70 Lifespan   | 60,000 Hours |
| 277V        | 0.26A            | Lumens         | 11,191 lm    |
| Input Watts | 71.7W            | Efficacy       | 156.1 lm/W   |

Technical Specifications

Compliance

UL Listed:

Suitable for wet locations. Suitable for ground mounting.

IESNA LM-79 & LM-80 Testing:

RAB LED luminaires and LED components have been tested by an independent laboratory in accordance with IESNA LM-79 and LM-80.

DLC Listed:

This product family is listed with the DesignLights Consortium (DLC). Individual SKUs within this family may carry either a DLC Standard or DLC Premium qualification. Please refer to the individual product specification sheet or the DLC Qualified Products List (QPL) at [designlights.org](https://designlights.org) to confirm the qualification status of a specific SKU prior to specification or purchase.

Electrical

Driver:

Constant Current, Class 2, 120-277V, 50/60Hz, 120V: 0.60A, 208V: 0.34A, 240V: 0.30A, 277V 0.26A

Dimming Driver:

Driver includes dimming control wiring for 0-10V dimming systems. Requires separate 0-10V DC dimming circuit. Dims down to 10%.

THD:

3.74% at 120V, 8.54% at 277V

Power Factor:

99.9% at 120V, 96.7% at 277V

Surge Protection:

4 kV


LED Characteristics

LEDs:

Long-life, high-efficacy, surface-mount LEDs



Dimensions

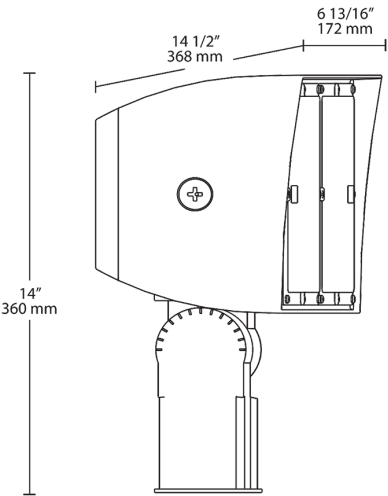

Features

- Ultra-high efficiency
- DLC Premium
- 0-10V Dimming, standard
- 60,000-Hour LED lifespan
- 5-Year, limited warranty

Ordering Matrix

| Family | Wattage                | Mount                           | Color Temp                                                | Finish                      | Driver                                               | Options                                                                                                                                                                                            | Other Options                           |
|--------|------------------------|---------------------------------|-----------------------------------------------------------|-----------------------------|------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------|
| PIPXL  | 70                     | SF                              |                                                           |                             | /D10                                                 |                                                                                                                                                                                                    |                                         |
|        | 100 = 100W<br>70 = 70W | SF = Slipfitter<br>T = Trunnion | Blank = 5000K Cool<br>N = 4000K Neutral<br>Y = 3000K Warm | Blank = Bronze<br>W = White | /480/D10 = Dimmable 480V<br>/D10 = Dimmable 120-277V | Blank = No Options<br>/PCU = 120-277V Button Photocell<br>/PCT = 120-277V Twistlock photocell<br>/PCT4 = 480V Twistlock photocell<br>/7PR = 7-Pin Receptacle<br>/BL = Bi-Level<br>/LC = Lightcloud | Blank = Standard<br>USA = BAA Compliant |



Industry-leading efficacy, incredible value. The low-cost floodlight family just upped its game. PIPXL™ - up to 16,600 lumens and 100W of affordable LED light.

Color: Bronze Weight: 20.6 lbs

|              |       |
|--------------|-------|
| Project:     | Type: |
| Prepared By: | Date: |

| Driver Info |                  | LED Info       |              |
|-------------|------------------|----------------|--------------|
| Type        | Constant Current | Watts          | 70W          |
| 120V        | 0.60A            | Color Temp     | 5000K (Cool) |
| 208V        | 0.34A            | Color Accuracy | 74 CRI       |
| 240V        | 0.30A            | L70 Lifespan   | 60,000 Hours |
| 277V        | 0.26A            | Lumens         | 11,191 lm    |
| Input Watts | 71.7W            | Efficacy       | 156.1 lm/W   |

Technical Specifications

Compliance

UL Listed:

Suitable for wet locations. Suitable for ground mounting.

IESNA LM-79 & LM-80 Testing:

RAB LED luminaires and LED components have been tested by an independent laboratory in accordance with IESNA LM-79 and LM-80.

DLC Listed:

This product family is listed with the DesignLights Consortium (DLC). Individual SKUs within this family may carry either a DLC Standard or DLC Premium qualification. Please refer to the individual product specification sheet or the DLC Qualified Products List (QPL) at [designlights.org](https://designlights.org) to confirm the qualification status of a specific SKU prior to specification or purchase.

Electrical

Driver:

Constant Current, Class 2, 120-277V, 50/60Hz, 120V: 0.60A, 208V: 0.34A, 240V: 0.30A, 277V 0.26A

Dimming Driver:

Driver includes dimming control wiring for 0-10V dimming systems. Requires separate 0-10V DC dimming circuit. Dims down to 10%.

THD:

3.74% at 120V, 8.54% at 277V

Power Factor:

99.9% at 120V, 96.7% at 277V

Surge Protection:

4 kV


LED Characteristics

LEDs:

Long-life, high-efficacy, surface-mount LEDs



Dimensions

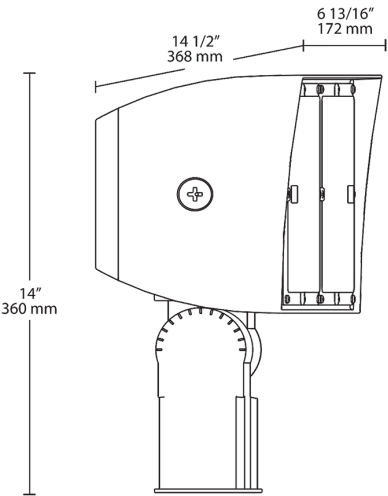

Features

- Ultra-high efficiency
- DLC Premium
- 0-10V Dimming, standard
- 60,000-Hour LED lifespan
- 5-Year, limited warranty

Ordering Matrix

| Family                 | Wattage | Mount                           | Color Temp                                                | Finish                      | Driver                                               | Options                                                                                                                                                                                            | Other Options                           |
|------------------------|---------|---------------------------------|-----------------------------------------------------------|-----------------------------|------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------|
| PIPXL                  | 70      | SF                              |                                                           |                             | /D10                                                 |                                                                                                                                                                                                    |                                         |
| 100 = 100W<br>70 = 70W |         | SF = Slipfitter<br>T = Trunnion | Blank = 5000K Cool<br>N = 4000K Neutral<br>Y = 3000K Warm | Blank = Bronze<br>W = White | /480/D10 = Dimmable 480V<br>/D10 = Dimmable 120-277V | Blank = No Options<br>/PCU = 120-277V Button Photocell<br>/PCT = 120-277V Twistlock photocell<br>/PCT4 = 480V Twistlock photocell<br>/7PR = 7-Pin Receptacle<br>/BL = Bi-Level<br>/LC = Lightcloud | Blank = Standard<br>USA = BAA Compliant |