


# PVC Rigid Schedule 40 Conduit

- Conforms to UL 651 and NEMA TC 2
- Sunlight resistant per UL 651
- Listed for 90° C conductors or cable
- Product manufactured with one integral solvent-weld bell standard per length

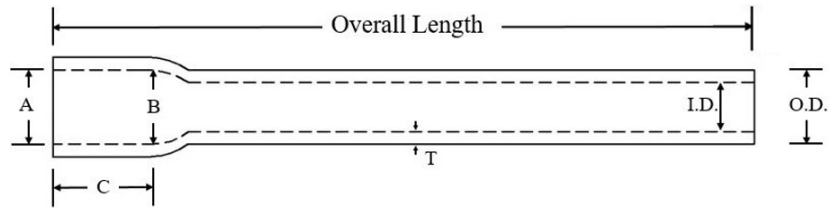

| Trade Size | 10-foot Length |                     | 20-foot Length |                     | Approximate Weight per 100' (lbs) |
|------------|----------------|---------------------|----------------|---------------------|-----------------------------------|
|            | Part Number    | Crate Quantity (ft) | Part Number    | Crate Quantity (ft) |                                   |
| ½          | 4005010        | 6,000               | 4005020        | 12,000              | 17                                |
| ¾          | 4007510        | 4,400               | 4007520        | 8,800               | 22                                |
| 1          | 4010010        | 3,600               | 4010020        | 7,200               | 33                                |
| 1¼         | 4012510        | 3,300               | 4012520        | 6,600               | 44                                |
| 1½         | 4015010        | 2,250               | 4015020        | 4,500               | 53                                |
| 2          | 4020010        | 1,400               | 4020020        | 2,800               | 73                                |
| 2½         | 4025010        | 930                 | 4025020        | 1,860               | 116                               |
| 3          | 4030010        | 880                 | 4030020        | 1,760               | 161                               |
| 3½         | 4035010        | 630                 | 4035020        | 12,60               | 194                               |
| 4          | 4040010        | 570                 | 4040020        | 1,140               | 229                               |
| 5          | 4050010        | 380                 | 4050020        | 760                 | 311                               |
| 6          | 4060010        | 260                 | 4060020        | 520                 | 403                               |
| 8*         | 4080010        | 140                 | 4080020        | 280                 | 607                               |


| Trade Size | Dimensions (in) |                    |                           |                 |               |               |
|------------|-----------------|--------------------|---------------------------|-----------------|---------------|---------------|
|            | Average OD      | Minimum Average ID | Minimum Wall Thickness, T | Bell Entrance A | Bell Bottom B | Bell Length C |
| ½          | 0.840           | 0.578              | 0.109                     | 0.852           | 0.836         | 1.75          |
| ¾          | 1.050           | 0.780              | 0.113                     | 1.064           | 1.046         | 2.25          |
| 1          | 1.315           | 1.004              | 0.133                     | 1.330           | 1.310         | 2.25          |
| 1¼         | 1.660           | 1.335              | 0.140                     | 1.677           | 1.655         | 2.25          |
| 1½         | 1.900           | 1.564              | 0.145                     | 1.918           | 1.894         | 2.75          |
| 2          | 2.375           | 2.021              | 0.154                     | 2.393           | 2.369         | 4.00          |
| 2½         | 2.875           | 2.414              | 0.203                     | 2.890           | 2.868         | 4.00          |
| 3          | 3.500           | 3.008              | 0.216                     | 3.515           | 3.492         | 4.00          |
| 3½         | 4.000           | 3.486              | 0.226                     | 4.015           | 3.992         | 4.00          |
| 4          | 4.500           | 3.961              | 0.237                     | 4.515           | 4.491         | 5.00          |
| 5          | 5.563           | 4.975              | 0.258                     | 5.593           | 5.553         | 5.75          |
| 6          | 6.625           | 5.986              | 0.280                     | 6.658           | 6.614         | 6.50          |
| 8*         | 8.625           | 7.853              | 0.322                     | 8.670           | 8.610         | 6.50          |

\*UL 651 does not include 8"



# PVC Rigid Schedule 40 Conduit

- Conforms to UL 651 and NEMA TC 2
- Sunlight resistant per UL 651
- Listed for 90° C conductors or cable
- Product manufactured with one integral solvent-weld bell standard per length

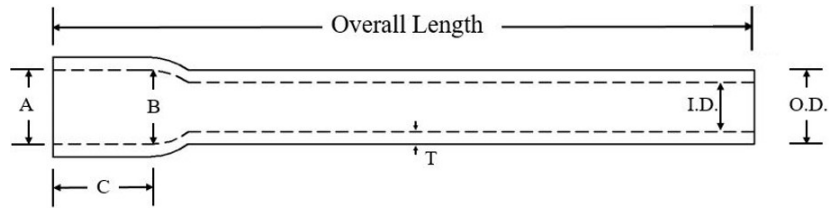

| Trade Size | 10-foot Length |                     | 20-foot Length |                     | Approximate Weight per 100' (lbs) |
|------------|----------------|---------------------|----------------|---------------------|-----------------------------------|
|            | Part Number    | Crate Quantity (ft) | Part Number    | Crate Quantity (ft) |                                   |
| ½          | 4005010        | 6,000               | 4005020        | 12,000              | 17                                |
| ¾          | 4007510        | 4,400               | 4007520        | 8,800               | 22                                |
| 1          | 4010010        | 3,600               | 4010020        | 7,200               | 33                                |
| 1¼         | 4012510        | 3,300               | 4012520        | 6,600               | 44                                |
| 1½         | 4015010        | 2,250               | 4015020        | 4,500               | 53                                |
| 2          | 4020010        | 1,400               | 4020020        | 2,800               | 73                                |
| 2½         | 4025010        | 930                 | 4025020        | 1,860               | 116                               |
| 3          | 4030010        | 880                 | 4030020        | 1,760               | 161                               |
| 3½         | 4035010        | 630                 | 4035020        | 12,60               | 194                               |
| 4          | 4040010        | 570                 | 4040020        | 1,140               | 229                               |
| 5          | 4050010        | 380                 | 4050020        | 760                 | 311                               |
| 6          | 4060010        | 260                 | 4060020        | 520                 | 403                               |
| 8*         | 4080010        | 140                 | 4080020        | 280                 | 607                               |

| Trade Size | Dimensions (in) |                    |                           |                 |               |               |
|------------|-----------------|--------------------|---------------------------|-----------------|---------------|---------------|
|            | Average OD      | Minimum Average ID | Minimum Wall Thickness, T | Bell Entrance A | Bell Bottom B | Bell Length C |
| ½          | 0.840           | 0.578              | 0.109                     | 0.852           | 0.836         | 1.75          |
| ¾          | 1.050           | 0.780              | 0.113                     | 1.064           | 1.046         | 2.25          |
| 1          | 1.315           | 1.004              | 0.133                     | 1.330           | 1.310         | 2.25          |
| 1¼         | 1.660           | 1.335              | 0.140                     | 1.677           | 1.655         | 2.25          |
| 1½         | 1.900           | 1.564              | 0.145                     | 1.918           | 1.894         | 2.75          |
| 2          | 2.375           | 2.021              | 0.154                     | 2.393           | 2.369         | 4.00          |
| 2½         | 2.875           | 2.414              | 0.203                     | 2.890           | 2.868         | 4.00          |
| 3          | 3.500           | 3.008              | 0.216                     | 3.515           | 3.492         | 4.00          |
| 3½         | 4.000           | 3.486              | 0.226                     | 4.015           | 3.992         | 4.00          |
| 4          | 4.500           | 3.961              | 0.237                     | 4.515           | 4.491         | 5.00          |
| 5          | 5.563           | 4.975              | 0.258                     | 5.593           | 5.553         | 5.75          |
| 6          | 6.625           | 5.986              | 0.280                     | 6.658           | 6.614         | 6.50          |
| 8*         | 8.625           | 7.853              | 0.322                     | 8.670           | 8.610         | 6.50          |

\*UL 651 does not include 8"

