

**Industrial LED luminaires**  
Exit and Emergency

**Sure-Lites**



**EATON**

*Powering Business Worldwide*


# SEL/SELM Indoor

WAREHOUSE / DISTRIBUTION | MANUFACTURING | GYMNASIUMS / MULTI-PURPOSE ROOMS / ATHLETIC CENTER | BIG BOX / RETAIL

SEL




Polycarbonate

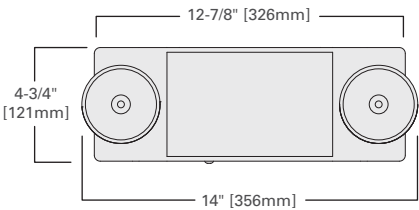

SELM




Metal

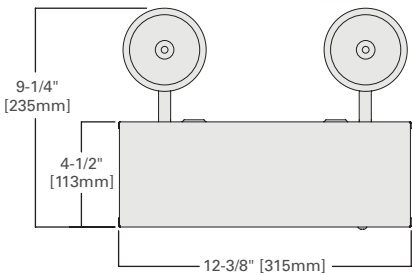

| Feature                                | Benefit                             |
|----------------------------------------|-------------------------------------|
| Up to 60 feet of egress coverage       | Up to \$300 savings on installation |
| LED source with Nickel cadmium battery | Up to ten years with no maintenance |
| Optional remote capacity               | Indoor, outdoor design flexibility  |
| Self diagnostics w/laser test          | Reduce labor of NFPA/OSHA testing   |


| Certification/warranty           |
|----------------------------------|
| UL924 damp location              |
| NFPA 101 compliant               |
| NEC/OSHA compliant               |
| 5-year product warranty          |
| 7-year prorated battery warranty |

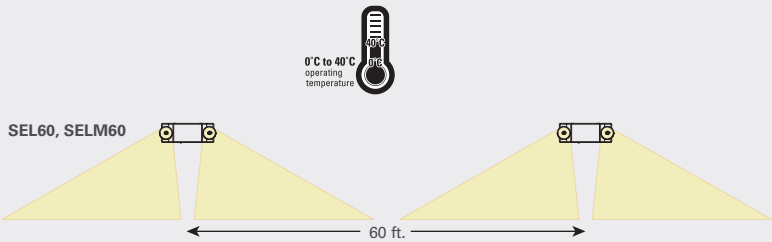

# SELW/SELD Outdoor

WAREHOUSE / DISTRIBUTION | MANUFACTURING | GYMNASIUMS / MULTI-PURPOSE ROOMS / ATHLETIC CENTER | BIG BOX / RETAIL

SELW

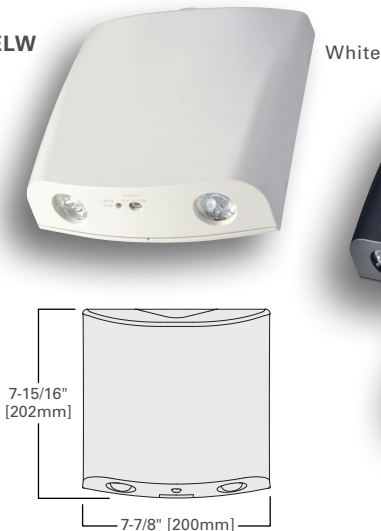


SELD




| Feature                                | Benefit                             |
|----------------------------------------|-------------------------------------|
| LED source with Nickel cadmium battery | Up to ten years with no maintenance |
| Forward throw optic                    | Maximum design flexibility          |
| 29 feet spacing                        | Less fixtures required              |
| Self diagnostics w/laser test          | Reduce labor of NFPA/OSHA testing   |

| Certification/warranty           |
|----------------------------------|
| UL924 wet location               |
| NFPA 101 compliant               |
| NEC/OSHA compliant               |
| 5-year product warranty          |
| 7-year prorated battery warranty |




| Feature                                   | Benefit                             |
|-------------------------------------------|-------------------------------------|
| LED source with Nickel cadmium battery    | Up to ten years with no maintenance |
| 58 foot spacing                           | Less fixtures required              |
| Standard Self diagnostics with laser test | Reduce labor of NFPA/OSHA testing   |
| NEMA 4X; IP66; - 30° C to 50° C           | Maximum design flexibility          |

| Certification                   |
|---------------------------------|
| UL924 wet location              |
| NEMA 4X                         |
| NFPA 101 compliant              |
| NEC/OSHA compliant              |
| IP66                            |
| NSF                             |
| IP66HAZ (class 1, Div 2) option |



LPX Exit

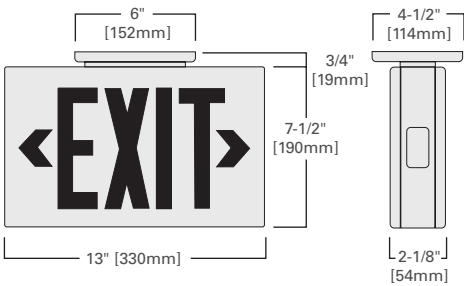


| Feature                                     | Benefit                             |
|---------------------------------------------|-------------------------------------|
| LED source with Nickel cadmium battery      | Up to ten years with no maintenance |
| Field adjustable for red or green           | Maximum design flexibility          |
| Optional emergency heads or remote capacity | Less fixtures required              |
| Standard Self diagnostics with laser test   | Reduce labor of NFPA/OSHA testing   |


| Certification/warranty           |
|----------------------------------|
| UL924 damp location              |
| NFPA 101 compliant               |
| NEC/OSHA compliant               |
| 5-year product warranty          |
| 7-year prorated battery warranty |




LPX LED Combo

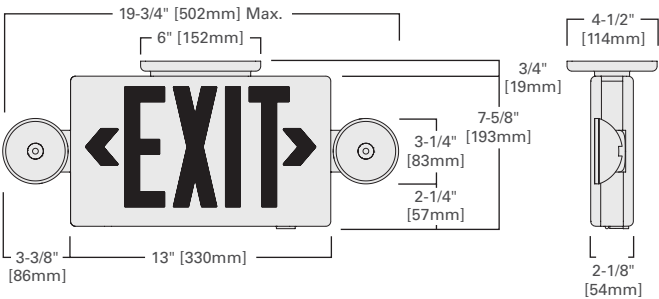

UX Exit

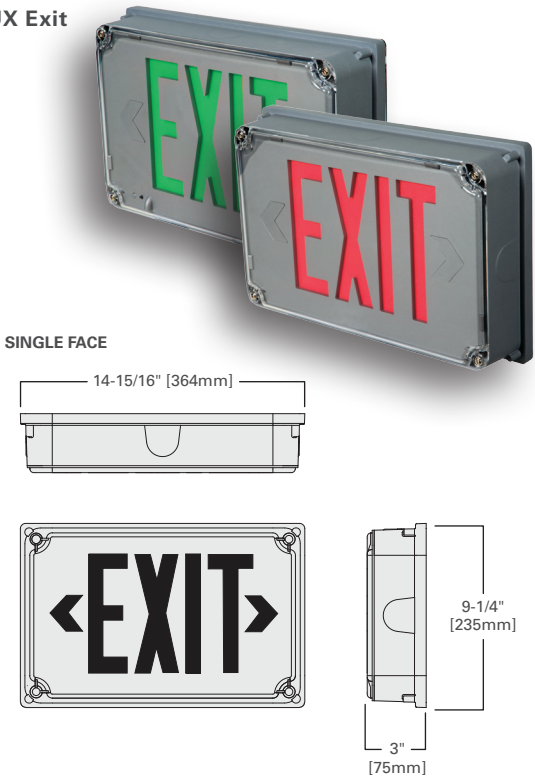

LPWX Exit

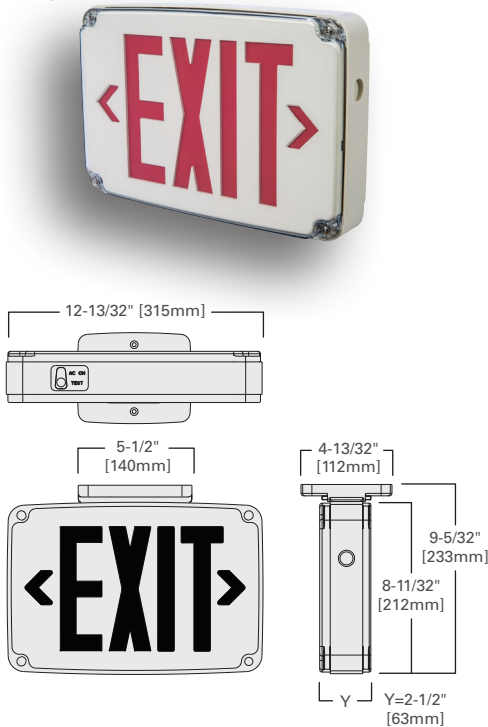

| Feature                                   | Benefit                             |
|-------------------------------------------|-------------------------------------|
| LED source with Nickel cadmium battery    | Up to ten years with no maintenance |
| Field adjustable for red or green         | Maximum design flexibility          |
| Standard Self diagnostics with laser test | Reduce labor of NFPA/OSHA testing   |
| NEMA 4X; IP66; - 30° C to 50° C           | Maximum design flexibility          |

| Certification/warranty                                    |
|-----------------------------------------------------------|
| UL924 wet location                                        |
| NEMA 4X/IP66                                              |
| NFPA 101 compliant                                        |
| NEC/OSHA/NSF compliant                                    |
| HAZ (class 1, Div 2) rated option                         |
| NSF                                                       |
| 5-year product warranty, 7-year prorated battery warranty |

| Feature                                   | Benefit                             |
|-------------------------------------------|-------------------------------------|
| LED source with Nickel cadmium battery    | Up to ten years with no maintenance |
| UV stabilized polycarbonate housing       | Outdoor capable                     |
| Standard Self diagnostics with laser test | Reduce labor of NFPA/OSHA testing   |
| Wet location listed; - 30° C to 50° C     | Maximum design flexibility          |

| Certification/warranty                                    |
|-----------------------------------------------------------|
| UL924 wet location                                        |
| NFPA 101 compliant                                        |
| NEC/OSHA compliant                                        |
| 5-year product warranty, 7-year prorated battery warranty |



#### **Lighting Product Lines**

Halo  
Halo Commercial  
Portfolio  
Iris  
RSA  
Metalux  
Corelite  
Neo-Ray  
Fail-Safe  
MWS  
Ametrix  
Shaper  
io  
Lumark  
McGraw-Edison  
Invue  
Ephesus  
Lumière  
Streetworks  
AtLite  
Sure-Lites

#### **Controls Product Lines**

Greengate  
iLumin  
Zero 88  
Fifth Light Technology  
iLight (International Only)

#### **Connected Lighting Systems**

LumaWatt Pro  
WaveLinx  
Distributed Low-Voltage Power  
ConnectWorks

**Eaton**  
1121 Highway 74 South  
Peachtree City, GA 30269  
P: 770-486-4800  
[www.eaton.com/lighting](http://www.eaton.com/lighting)

**Canada Sales**  
5925 McLaughlin Road  
Mississauga, Ontario L5R 1B8  
P: 905-501-3000  
F: 905-501-3172

© 2017 Eaton  
All Rights Reserved  
Printed in USA  
Publication No. BR505013EN  
June 1, 2017

Eaton is a registered trademark.

All other trademarks are property of their respective owners.

Product availability, specifications, and compliances are subject to change without notice.

**Industrial LED luminaires**  
Exit and Emergency

**Sure-Lites**



**EATON**

*Powering Business Worldwide*


# SEL/SELM Indoor

WAREHOUSE / DISTRIBUTION | MANUFACTURING | GYMNASIUMS / MULTI-PURPOSE ROOMS / ATHLETIC CENTER | BIG BOX / RETAIL

SEL




Polycarbonate

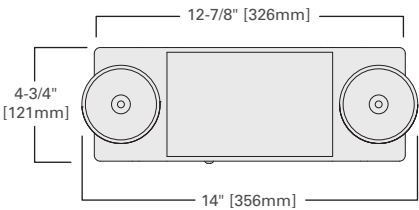

SELM




Metal

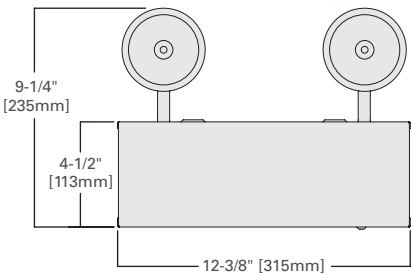

| Feature                                | Benefit                             |
|----------------------------------------|-------------------------------------|
| Up to 60 feet of egress coverage       | Up to \$300 savings on installation |
| LED source with Nickel cadmium battery | Up to ten years with no maintenance |
| Optional remote capacity               | Indoor, outdoor design flexibility  |
| Self diagnostics w/laser test          | Reduce labor of NFPA/OSHA testing   |


| Certification/warranty           |
|----------------------------------|
| UL924 damp location              |
| NFPA 101 compliant               |
| NEC/OSHA compliant               |
| 5-year product warranty          |
| 7-year prorated battery warranty |

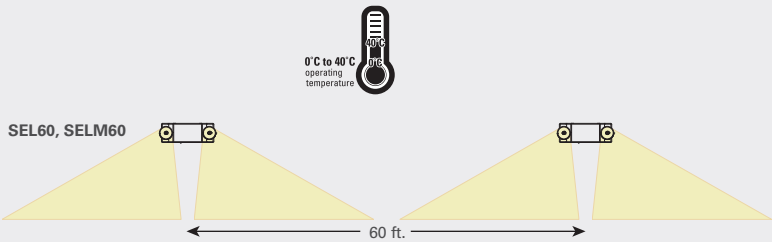


# SELW/SELD Outdoor

WAREHOUSE / DISTRIBUTION | MANUFACTURING | GYMNASIUMS / MULTI-PURPOSE ROOMS / ATHLETIC CENTER | BIG BOX / RETAIL

SELW

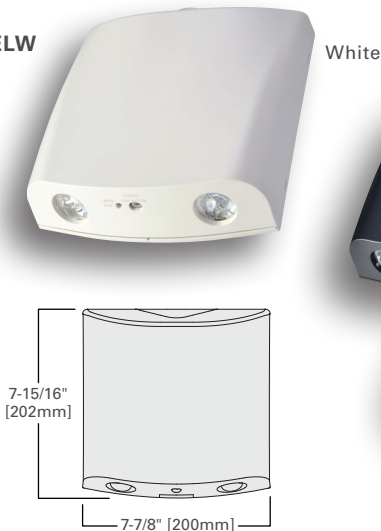


SELD

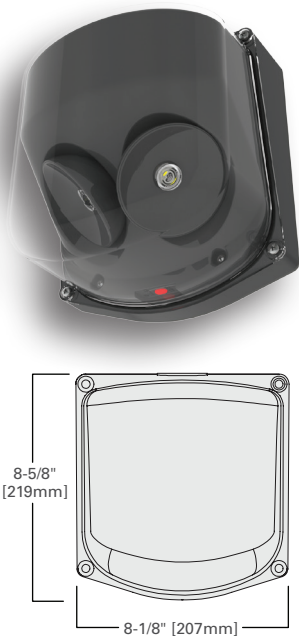


| Feature                                | Benefit                             |
|----------------------------------------|-------------------------------------|
| LED source with Nickel cadmium battery | Up to ten years with no maintenance |
| Forward throw optic                    | Maximum design flexibility          |
| 29 feet spacing                        | Less fixtures required              |
| Self diagnostics w/laser test          | Reduce labor of NFPA/OSHA testing   |

| Certification/warranty           |
|----------------------------------|
| UL924 wet location               |
| NFPA 101 compliant               |
| NEC/OSHA compliant               |
| 5-year product warranty          |
| 7-year prorated battery warranty |




| Feature                                   | Benefit                             |
|-------------------------------------------|-------------------------------------|
| LED source with Nickel cadmium battery    | Up to ten years with no maintenance |
| 58 foot spacing                           | Less fixtures required              |
| Standard Self diagnostics with laser test | Reduce labor of NFPA/OSHA testing   |
| NEMA 4X; IP66; - 30° C to 50° C           | Maximum design flexibility          |

| Certification                   |
|---------------------------------|
| UL924 wet location              |
| NEMA 4X                         |
| NFPA 101 compliant              |
| NEC/OSHA compliant              |
| IP66                            |
| NSF                             |
| IP66HAZ (class 1, Div 2) option |



LPX Exit

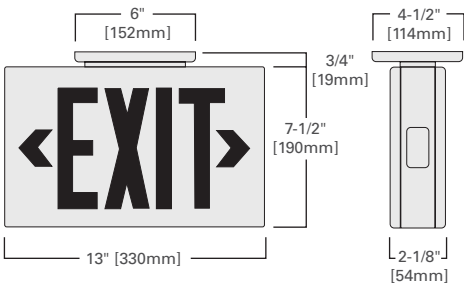


| Feature                                     | Benefit                             |
|---------------------------------------------|-------------------------------------|
| LED source with Nickel cadmium battery      | Up to ten years with no maintenance |
| Field adjustable for red or green           | Maximum design flexibility          |
| Optional emergency heads or remote capacity | Less fixtures required              |
| Standard Self diagnostics with laser test   | Reduce labor of NFPA/OSHA testing   |


| Certification/warranty           |
|----------------------------------|
| UL924 damp location              |
| NFPA 101 compliant               |
| NEC/OSHA compliant               |
| 5-year product warranty          |
| 7-year prorated battery warranty |




LPX LED Combo

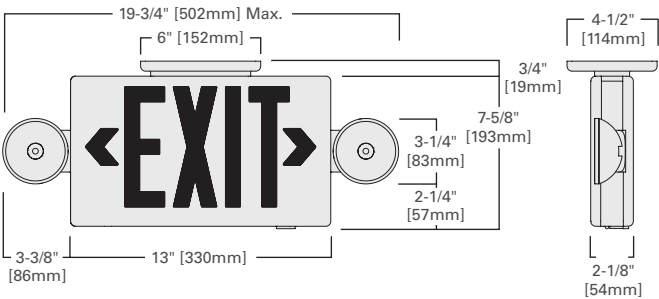

UX Exit

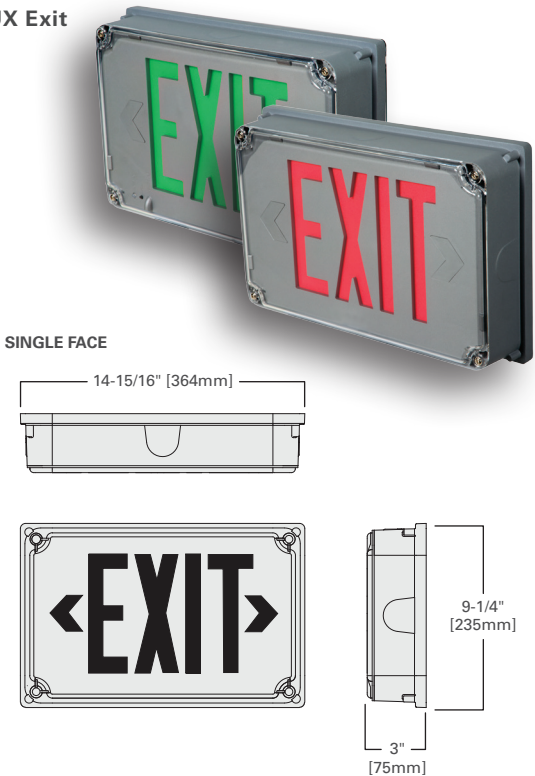

LPWX Exit

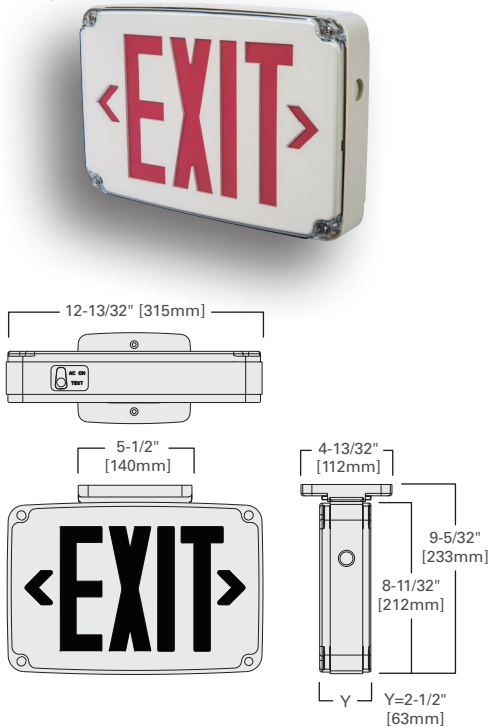

| Feature                                   | Benefit                             |
|-------------------------------------------|-------------------------------------|
| LED source with Nickel cadmium battery    | Up to ten years with no maintenance |
| Field adjustable for red or green         | Maximum design flexibility          |
| Standard Self diagnostics with laser test | Reduce labor of NFPA/OSHA testing   |
| NEMA 4X; IP66; - 30° C to 50° C           | Maximum design flexibility          |

| Certification/warranty                                    |
|-----------------------------------------------------------|
| UL924 wet location                                        |
| NEMA 4X/IP66                                              |
| NFPA 101 compliant                                        |
| NEC/OSHA/NSF compliant                                    |
| HAZ (class 1, Div 2) rated option                         |
| NSF                                                       |
| 5-year product warranty, 7-year prorated battery warranty |

| Feature                                   | Benefit                             |
|-------------------------------------------|-------------------------------------|
| LED source with Nickel cadmium battery    | Up to ten years with no maintenance |
| UV stabilized polycarbonate housing       | Outdoor capable                     |
| Standard Self diagnostics with laser test | Reduce labor of NFPA/OSHA testing   |
| Wet location listed; - 30° C to 50° C     | Maximum design flexibility          |

| Certification/warranty                                    |
|-----------------------------------------------------------|
| UL924 wet location                                        |
| NFPA 101 compliant                                        |
| NEC/OSHA compliant                                        |
| 5-year product warranty, 7-year prorated battery warranty |



**Lighting Product Lines**

Halo  
Halo Commercial  
Portfolio  
Iris  
RSA  
Metalux  
Corelite  
Neo-Ray  
Fail-Safe  
MWS  
Ametrix  
Shaper  
io  
Lumark  
McGraw-Edison  
Invue  
Ephesus  
Lumière  
Streetworks  
AtLite  
Sure-Lites

**Controls Product Lines**

Greengate  
iLumin  
Zero 88  
Fifth Light Technology  
iLight (International Only)

**Connected Lighting Systems**

LumaWatt Pro  
WaveLinx  
Distributed Low-Voltage Power  
ConnectWorks

**Eaton**

1121 Highway 74 South  
Peachtree City, GA 30269  
P: 770-486-4800  
[www.eaton.com/lighting](http://www.eaton.com/lighting)

**Canada Sales**

5925 McLaughlin Road  
Mississauga, Ontario L5R 1B8  
P: 905-501-3000  
F: 905-501-3172

© 2017 Eaton  
All Rights Reserved  
Printed in USA  
Publication No. BR505013EN  
June 1, 2017

Eaton is a registered trademark.

All other trademarks are property  
of their respective owners.

Product availability, specifications,  
and compliances are subject to  
change without notice.



*Powering Business Worldwide*