

# AMERICAN FITTINGS Corporation



Made in the USA Since 1946

LIQUID TIGHT CONNECTORS  
Reusable Fittings / Straight Connectors  
Size Range: 3/8" to 5"

## Liquid Tight Connectors Reusable Fittings

- Industrial specification grade, screw machined steel, zinc plated
- UL Rated Liquid Tight
- Includes sealing washer
- Bonds conduit to box or enclosure
- Corrosion resistant protection from moisture & oils
- Designed to protect against excessive vibration

### Straight Connectors (STR)

| Cat. #   | Size   | Unit Ctn | Std Pkg | WT/ 100 |
|----------|--------|----------|---------|---------|
| STR38    | 3/8"   | 20       | 200     | 10      |
| STR50    | 1/2"   | 20       | 200     | 13      |
| STR75    | 3/4"   | 20       | 100     | 18      |
| STR100   | 1"     | 5        | 50      | 32      |
| STR125   | 1-1/4" | 5        | 25      | 44      |
| STR150   | 1-1/2" | 5        | 25      | 66      |
| STR200   | 2"     | 5        | 25      | 85      |
| STR250** | 2-1/2" | -        | 5       | 260     |
| STR300** | 3"     | -        | 4       | 360     |
| STR350** | 3-1/2" | -        | 4       | 445     |
| STR400** | 4"     | -        | 2       | 520     |
| STR500** | 5"     | -        | 1       | 1150    |

6" connectors available upon request

\*\* Malleable Iron

### Dimensional Table

| Cat. #   | A<br>Diameter | B<br>Overall Length | C<br>Length of Thread |
|----------|---------------|---------------------|-----------------------|
| STR38/B  | 1.09          | 1.19                | .63                   |
| STR50/B  | 1.19          | 1.34                | .63                   |
| STR75/B  | 1.43          | 1.43                | .63                   |
| STR100/B | 1.75          | 1.63                | .66                   |
| STR125/B | 2.16          | 1.84                | .67                   |
| STR150/B | 2.38          | 2.00                | .72                   |
| STR200/B | 2.88          | 2.13                | .72                   |
| STR250/B | 4.00          | 3.25                | 1.50                  |
| STR300/B | 4.63          | 3.88                | 1.50                  |
| STR350/B | 5.50          | 4.00                | 1.50                  |
| STR400/B | 5.82          | 4.00                | 1.63                  |
| STR500/B | 7.00          | 5.00                | 1.63                  |

## SPEC-grade



E93605



LR61799

UL rated suitable for hazardous locations  
Class I, Div. 2; Class II, Div. 1 and 2;  
Class III, Div. 1 and 2; NEC 501-4(b), 505-4(a), 503-3(a)

Featuring:  
**EZ-Torque Compression Nut**

### Straight Connectors with Insulated Throat

| Cat. #    | Size   | Unit Ctn | Std Pkg | WT/ 100 |
|-----------|--------|----------|---------|---------|
| STR38B    | 3/8"   | 20       | 200     | 10      |
| STR50B    | 1/2"   | 20       | 200     | 13      |
| STR75B    | 3/4"   | 20       | 100     | 18      |
| STR100B   | 1"     | 5        | 50      | 32      |
| STR125B   | 1-1/4" | 5        | 25      | 44      |
| STR150B   | 1-1/2" | 5        | 25      | 66      |
| STR200B   | 2"     | 5        | 25      | 85      |
| STR250B** | 2-1/2" | -        | 5       | 260     |
| STR300B** | 3"     | -        | 4       | 360     |
| STR350B** | 3-1/2" | -        | 4       | 445     |
| STR400B** | 4"     | -        | 2       | 520     |
| STR500B** | 5"     | -        | 1       | 1150    |

6" connectors available upon request

\*\* Malleable Iron

# AMERICAN FITTINGS Corporation



Made in the USA Since 1946

LIQUID TIGHT CONNECTORS  
90° Angle Connectors  
Size Range: 3/8" to 4"

## Liquid Tight Connectors 90° Reusable Fittings

- Industrial specification grade steel, zinc plated
- Malleable iron body
- UL rated Liquid Tight
- Includes sealing washer
- Bonds conduit to box or enclosure
- Corrosion resistant protection from moisture & oils
- Designed to protect against excessive vibration

### 90° Angle Connectors (STR)


| Cat. #     | Size   | Unit Ctn | Std Pkg | WT/ 100 |
|------------|--------|----------|---------|---------|
| STR3890**  | 3/8"   | 10       | 100     | 24      |
| STR5090**  | 1/2"   | 10       | 100     | 24      |
| STR7590**  | 3/4"   | 5        | 50      | 38      |
| STR10090** | 1"     | 5        | 25      | 70      |
| STR12590** | 1-1/4" | 2        | 20      | 88      |
| STR15090** | 1-1/2" | 1        | 10      | 125     |
| STR20090** | 2"     | 1        | 5       | 180     |
| STR25090   | 2-1/2" | -        | 2       | 625     |
| STR30090   | 3"     | -        | 1       | 900     |
| STR35090   | 3-1/2" | -        | 1       | 1000    |
| STR40090   | 4"     | -        | 2       | 1500    |

\*\*Steel Nut

### Dimensional Table

| Cat. #     | A     | B     | C<br>Length<br>of Thread | D<br>Ø |
|------------|-------|-------|--------------------------|--------|
| STR3890/B  | 1.25  | 1.59  | .59                      | 1.09   |
| STR5090/B  | 1.25  | 1.66  | .59                      | 1.19   |
| STR7590/B  | 1.53  | 1.78  | .59                      | 1.43   |
| STR10090/B | 1.84  | 2.19  | .66                      | 1.75   |
| STR12590/B | 1.94  | 2.38  | .69                      | 2.16   |
| STR15090/B | 2.09  | 2.63  | .72                      | 2.38   |
| STR20090/B | 2.41  | 3.06  | .72                      | 2.88   |
| STR25090/B | 8.00  | 9.25  | 1.50                     | ?      |
| STR30090/B | 8.75  | 10.50 | 1.50                     | ?      |
| STR35090/B | 10.93 | 11.50 | 1.50                     | ?      |
| STR40090/B | 12.63 | 13.00 | 1.50                     | ?      |

## SPEC-grade

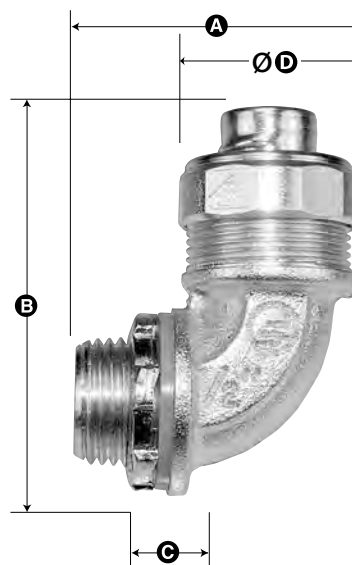

E93605



LR61799

UL rated suitable for hazardous locations  
Class I, Div. 2; Class II, Div. 1 and 2;  
Class III, Div. 1 and 2; NEC 501-4(b), 505-4(a), 503-3(a)

Featuring:  
**EZ-Torque Compression Nut**

### 90° Angle Connectors with Insulated Throat

| Cat. #      | Size   | Unit Ctn | Std Pkg | WT/ 100 |
|-------------|--------|----------|---------|---------|
| STR3890B**  | 3/8"   | 10       | 100     | 24      |
| STR5090B**  | 1/2"   | 10       | 100     | 24      |
| STR7590B**  | 3/4"   | 5        | 50      | 38      |
| STR10090B** | 1"     | 5        | 25      | 70      |
| STR12590B** | 1-1/4" | 2        | 20      | 88      |
| STR15090B** | 1-1/2" | 1        | 10      | 125     |
| STR20090B** | 2"     | 1        | 5       | 180     |
| STR25090B   | 2-1/2" | -        | 2       | 625     |
| STR30090B   | 3"     | -        | 1       | 900     |
| STR35090B   | 3-1/2" | -        | 1       | 1000    |
| STR40090B   | 4"     | -        | 2       | 1500    |

\*\*Steel Nut

# AMERICAN FITTINGS Corporation



Made in the USA Since 1946

LIQUID TIGHT CONNECTORS  
45° Angle Connectors  
Size Range: 3/8" to 4"

## Liquid Tight Connectors 45° Reusable Fittings

- Industrial specification grade steel, zinc plated
- Malleable iron body
- UL rated Liquid Tight
- Includes sealing washer
- Bonds conduit to box or enclosure
- Corrosion resistant protection from moisture & oils
- Designed to protect against excessive vibration

### 45° Angle Connectors (STR)


| Cat. #     | Size   | Unit Ctn | Std Pkg | WT/ 100 |
|------------|--------|----------|---------|---------|
| STR3845**  | 3/8"   | 10       | 100     | 21      |
| STR5045**  | 1/2"   | 10       | 100     | 23      |
| STR7545**  | 3/4"   | 10       | 50      | 32      |
| STR10045** | 1"     | 5        | 50      | 53      |
| STR12545** | 1-1/4" | 5        | 25      | 69      |
| STR15045** | 1-1/2" | 3        | 15      | 99      |
| STR20045** | 2"     | 1        | 10      | 152     |
| STR25045   | 2-1/2" | -        | 2       | 478     |
| STR30045   | 3"     | -        | 2       | 775     |
| STR35045   | 3-1/2" | -        | 1       | 880     |
| STR40045   | 4"     | -        | 1       | 1000    |

\*\* Steel Nut

### Dimensional Table

| Cat. #     | A<br>Length of Thread | B    | C    | D    |
|------------|-----------------------|------|------|------|
| STR3845/B  | .59                   | 1.09 | 1.22 | 1.03 |
| STR5045/B  | .59                   | 1.19 | 1.32 | 1.03 |
| STR7545/B  | .59                   | 1.43 | 1.38 | 1.13 |
| STR10045/B | .66                   | 1.75 | 1.66 | 1.25 |
| STR12545/B | .69                   | 2.16 | 1.72 | 1.34 |
| STR15045/B | .72                   | 2.38 | 2.00 | 1.47 |
| STR20045/B | .72                   | 2.88 | 2.28 | 1.63 |
| STR25045/B | 1.50                  | 4.00 | 2.25 | 4.75 |
| STR30045/B | 1.50                  | 4.63 | 2.50 | 5.50 |
| STR35045/B | 1.56                  | 5.25 | 2.50 | 6.50 |
| STR40045/B | 1.63                  | 5.81 | 2.50 | 7.75 |

## SPEC-grade

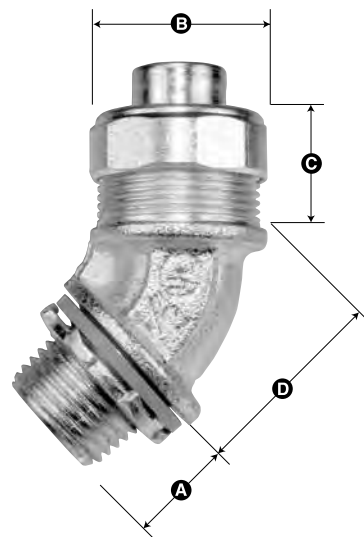

E93605



LR61799

UL rated suitable for hazardous locations  
Class I, Div. 2; Class II, Div. 1 and 2;  
Class III, Div. 1 and 2; NEC 501-4(b), 502-4(a), 503-3(a)

Featuring:  
**EZ-Torque Compression Nut**

### 45° Angle Connectors with Insulated Throat

| Cat. #      | Size   | Unit Ctn | Std Pkg | WT/ 100 |
|-------------|--------|----------|---------|---------|
| STR3845B**  | 3/8"   | 10       | 100     | 21      |
| STR5045B**  | 1/2"   | 10       | 100     | 23      |
| STR7545B**  | 3/4"   | 10       | 50      | 32      |
| STR10045B** | 1"     | 5        | 50      | 53      |
| STR12545B** | 1-1/4" | 5        | 25      | 69      |
| STR15045B** | 1-1/2" | 3        | 15      | 99      |
| STR20045B** | 2"     | 1        | 10      | 152     |
| STR25045B   | 2-1/2" | -        | 2       | 478     |
| STR30045B   | 3"     | -        | 2       | 775     |
| STR35045B   | 3-1/2" | -        | 1       | 880     |
| STR40045B   | 4"     | -        | 1       | 1000    |

\*\* Steel Nut

# AMERICAN FITTINGS Corporation



Made in the USA Since 1946

LIQUID TIGHT CONNECTORS  
Grounding Type with Aluminum Lugs  
Size Range: 3/8" to 4"

## Liquid Tight Connectors Grounding Type with Aluminum Lugs

- A quick, effective solution to connecting liquid tight conduit while terminating a bonding connector in one action
- Sleek screw machined bodies and nuts promote easy installation
- Strong construction and long ferrule prevent pullouts
- All components are reusable
- Furnished with locknut and sealing washer


### Straight Connectors (STR)

| Cat. #   | Size   | Unit Ctn | Std Pkg | WT/ 100 |
|----------|--------|----------|---------|---------|
| STR38GL  | 3/8"   | 25       | 125     | 12      |
| STR50GL  | 1/2"   | 25       | 125     | 15      |
| STR75GL  | 3/4"   | 25       | 125     | 20      |
| STR100GL | 1"     | 10       | 50      | 34      |
| STR125GL | 1-1/4" | 5        | 25      | 46      |
| STR150GL | 1-1/2" | 5        | 25      | 68      |
| STR200GL | 2"     | 2        | 10      | 87      |
| STR250GL | 2-1/2" | -        | 5       | 267     |
| STR300GL | 3"     | -        | 4       | 367     |
| STR350GL | 3-1/2" | -        | 3       | 464     |
| STR400GL | 4"     | -        | 2       | 539     |

### Dimensional Table

| Cat. #   | A<br>Diameter | B<br>Overall Length | C<br>Length of Thread | D<br>Length of Lug | Wire Size |     |
|----------|---------------|---------------------|-----------------------|--------------------|-----------|-----|
|          |               |                     |                       |                    | Min       | Max |
| STR38GL  | 1.09          | 1.19                | .63                   | .750               | 14        | 4   |
| STR50GL  | 1.19          | 1.34                | .63                   | .750               | 14        | 4   |
| STR75GL  | 1.43          | 1.43                | .63                   | .750               | 14        | 4   |
| STR100GL | 1.75          | 1.63                | .66                   | .750               | 14        | 4   |
| STR125GL | 2.16          | 1.84                | .67                   | .750               | 14        | 4   |
| STR150GL | 2.38          | 2.00                | .72                   | .750               | 14        | 4   |
| STR200GL | 2.88          | 2.13                | .72                   | .750               | 14        | 4   |
| STR250GL | 4.00          | 3.25                | 1.50                  | 1.093              | 8         | 110 |
| STR300GL | 4.63          | 3.88                | 1.50                  | 1.093              | 8         | 110 |
| STR350GL | 5.50          | 4.00                | 1.50                  | 1.687              | 6         | 250 |
| STR400GL | 5.82          | 4.00                | 1.63                  | 1.687              | 6         | 250 |

## SPEC-grade

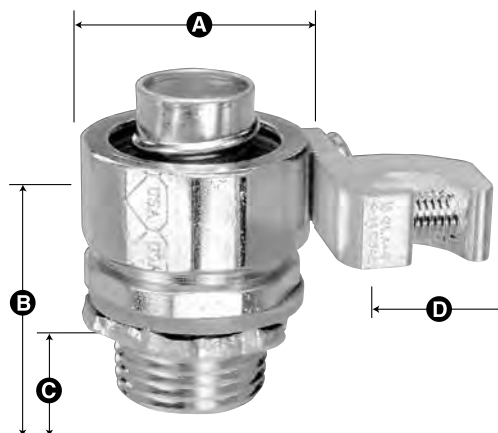

UL rated suitable for hazardous locations  
Class I, Div. 2; Class II, Div. 1 and 2;  
Class III, Div. 1 and 2; NEC 501-4(b), 502-4(a), 503-3(a)

Featuring:  
**EZ-Torque Compression Nut**

### Straight Connectors with Insulated Throat

| Cat. #    | Size   | Unit Ctn | Std Pkg | WT/ 100 |
|-----------|--------|----------|---------|---------|
| STR38BGL  | 3/8"   | 25       | 125     | 12      |
| STR50BGL  | 1/2"   | 25       | 125     | 15      |
| STR75BGL  | 3/4"   | 25       | 125     | 20      |
| STR100BGL | 1"     | 10       | 50      | 34      |
| STR125BGL | 1-1/4" | 5        | 25      | 46      |
| STR150BGL | 1-1/2" | 5        | 25      | 68      |
| STR200BGL | 2"     | 2        | 10      | 87      |
| STR250BGL | 2-1/2" | -        | 5       | 267     |
| STR300BGL | 3"     | -        | 4       | 367     |
| STR350BGL | 3-1/2" | -        | 3       | 464     |
| STR400BGL | 4"     | -        | 2       | 539     |

# AMERICAN FITTINGS Corporation



Made in the USA Since 1946

LIQUID TIGHT CONNECTORS  
Grounding Type with Aluminum Lugs: 90° Angle  
Size Range: 3/8" to 4"

## Liquid Tight Connectors 90° Grounding Type with Aluminum Lugs


- A quick, effective solution to connecting liquid tight conduit while terminating a bonding connector in one action
- Strong construction and long ferrule prevent pullouts
- All components are reusable
- Furnished with locknut and sealing washer

### 90° Angle Connectors (STR)

| Cat. #     | Size   | Unit Ctn | Std Pkg | WT/ 100 |
|------------|--------|----------|---------|---------|
| STR3890GL  | 3/8"   | 20       | 100     | 26      |
| STR5090GL  | 1/2"   | 20       | 100     | 26      |
| STR7590GL  | 3/4"   | 10       | 50      | 40      |
| STR10090GL | 1"     | 5        | 25      | 72      |
| STR12590GL | 1-1/4" | 4        | 20      | 90      |
| STR15090GL | 1-1/2" | 3        | 15      | 127     |
| STR20090GL | 2"     | 2        | 10      | 182     |
| STR25090GL | 2-1/2" | -        | 2       | 632     |
| STR30090GL | 3"     | -        | 1       | 907     |
| STR35090GL | 3-1/2" | -        | 1       | 1019    |
| STR40090GL | 4"     | -        | 2       | 1519    |

### 90° Angle Connectors with Insulated Throat

| Cat. #     | Size   | Unit Ctn | Std Pkg | WT/ 100 |
|------------|--------|----------|---------|---------|
| STR3890GL  | 3/8"   | 20       | 100     | 26      |
| STR5090GL  | 1/2"   | 20       | 100     | 26      |
| STR7590GL  | 3/4"   | 10       | 50      | 40      |
| STR10090GL | 1"     | 5        | 25      | 72      |
| STR12590GL | 1-1/4" | 4        | 20      | 90      |
| STR15090GL | 1-1/2" | 3        | 15      | 127     |
| STR20090GL | 2"     | 2        | 10      | 182     |
| STR25090GL | 2-1/2" | -        | 2       | 632     |
| STR30090GL | 3"     | -        | 1       | 907     |
| STR35090GL | 3-1/2" | -        | 1       | 1019    |
| STR40090GL | 4"     | -        | 2       | 1519    |

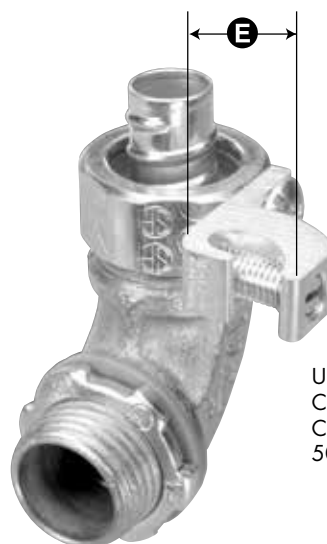


**SPEC-grade**



E258095

UL rated suitable for hazardous locations  
Class I, Div. 2; Class II, Div. 1 and 2;  
Class III, Div. 1 and 2; NEC 501-4(b),  
502-4(a), 503-3(a)

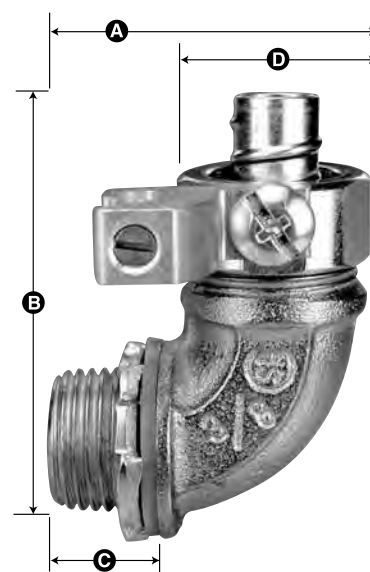

Featuring:  
**EZ-Torque Compression Nut**

### Dimensional Table

| Cat. #     | A     | B     | C    | D    | E     | Wire Min | Size Max |
|------------|-------|-------|------|------|-------|----------|----------|
| STR3890GL  | 1.25  | 1.59  | .59  | 1.09 | .750  | 14       | 4        |
| STR5090GL  | 1.25  | 1.66  | .59  | 1.19 | .750  | 14       | 4        |
| STR7590GL  | 1.53  | 1.78  | .59  | 1.43 | .750  | 14       | 4        |
| STR10090GL | 1.84  | 2.19  | .66  | 1.75 | .750  | 14       | 4        |
| STR12590GL | 1.94  | 2.38  | .69  | 2.16 | .750  | 14       | 4        |
| STR15090GL | 2.09  | 2.63  | .72  | 2.38 | .750  | 14       | 4        |
| STR20090GL | 2.41  | 3.06  | .72  | 2.88 | .750  | 14       | 4        |
| STR25090GL | 8.00  | 9.25  | 1.50 | 4.00 | 1.093 | 8        | 110      |
| STR30090GL | 8.75  | 10.50 | 1.50 | 4.63 | 1.093 | 8        | 110      |
| STR35090GL | 10.93 | 11.50 | 1.50 | 5.50 | 1.687 | 6        | 250      |
| STR40090GL | 12.63 | 13.00 | 1.50 | 5.82 | 1.687 | 6        | 250      |



# AMERICAN FITTINGS Corporation



Made in the USA Since 1946

LIQUID TIGHT CONNECTORS  
Grounding Type with Aluminum Lugs: 45° Angle  
Size Range: 3/8" to 4"

## Liquid Tight Connectors 45° Grounding Type with Aluminum Lugs

- A quick, effective solution to connecting liquid tight conduit while terminating a bonding connector in one action
- Strong construction and long ferrule prevent pullouts
- All components are reusable
- Furnished with locknut and sealing washer

### 45° Angle Connectors (STR)

| Cat. #     | Size   | Unit Ctn | Std Pkg | WT/ 100 |
|------------|--------|----------|---------|---------|
| STR3845GL  | 3/8"   | 20       | 100     | 23      |
| STR5045GL  | 1/2"   | 20       | 100     | 25      |
| STR7545GL  | 3/4"   | 10       | 50      | 34      |
| STR10045GL | 1"     | 5        | 25      | 55      |
| STR12545GL | 1-1/4" | 4        | 20      | 71      |
| STR15045GL | 1-1/2" | 3        | 15      | 101     |
| STR20045GL | 2"     | 2        | 10      | 154     |
| STR25045GL | 2-1/2" | -        | 4       | 485     |
| STR30045GL | 3"     | -        | 2       | 782     |
| STR35045GL | 3-1/2" | -        | 2       | 899     |
| STR40045GL | 4"     | -        | 1       | 1019    |

### 45° Angle Connectors with Insulated Throat


| Cat. #      | Size   | Unit Ctn | Std Pkg | WT/ 100 |
|-------------|--------|----------|---------|---------|
| STR3845BGL  | 3/8"   | 20       | 100     | 23      |
| STR5045BGL  | 1/2"   | 20       | 100     | 25      |
| STR7545BGL  | 3/4"   | 10       | 50      | 34      |
| STR10045BGL | 1"     | 5        | 25      | 55      |
| STR12545BGL | 1-1/4" | 4        | 20      | 71      |
| STR15045BGL | 1-1/2" | 3        | 15      | 101     |
| STR20045BGL | 2"     | 2        | 10      | 154     |
| STR25045BGL | 2-1/2" | -        | 4       | 485     |
| STR30045BGL | 3"     | -        | 2       | 782     |
| STR35045BGL | 3-1/2" | -        | 2       | 899     |
| STR40045BGL | 4"     | -        | 1       | 1019    |



**SPEC-grade**



UL rated suitable for hazardous locations  
Class I, Div. 2; Class II, Div. 1 and 2;  
Class III, Div. 1 and 2; NEC 501-4(b),  
502-4(a), 503-3(a)

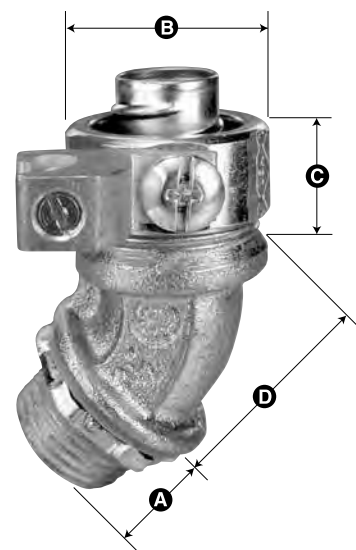

Featuring:  
EZ-Torque Compression Nut

### Dimensional Table

| Cat. #     | A    | B    | C    | D    | E     |
|------------|------|------|------|------|-------|
| STR3845GL  | .59  | 1.09 | 1.22 | 1.03 | .750  |
| STR5045GL  | .59  | 1.19 | 1.32 | 1.03 | .750  |
| STR7545GL  | .59  | 1.43 | 1.38 | 1.13 | .750  |
| STR10045GL | .66  | 1.75 | 1.66 | 1.25 | .750  |
| STR12545GL | .69  | 2.16 | 1.72 | 1.34 | .750  |
| STR15045GL | .72  | 2.38 | 2.00 | 1.47 | .750  |
| STR20045GL | .72  | 2.88 | 2.28 | 1.63 | .750  |
| STR25045GL | 1.50 | 4.00 | 2.25 | 4.75 | 1.093 |
| STR30045GL | 1.50 | 4.63 | 2.50 | 5.50 | 1.093 |
| STR35045GL | 1.56 | 5.25 | 2.50 | 6.50 | 1.687 |
| STR40045GL | 1.63 | 5.81 | 2.50 | 7.75 | 1.687 |

# AMERICAN FITTINGS Corporation



Made in the USA Since 1946

LIQUID TIGHT CONNECTORS  
Liquid Tight Conduit to EMT  
Size Range: 1/2" to 1"

## Combination Couplings *Liquid Tight Conduit to EMT*

- Reusable ferrule
- For rooftop HVAC air conditioners and motor hook-ups
- Steel, zinc plated



UL rated suitable for hazardous locations  
Class I, Div. 2; Class II, Div. 1 and 2;  
Class III, Div. 1 and 2; NEC 501-4(b),  
502-4(a), 503-3(a)

**SPEC-*grade***



Featuring:  
**EZ-Torque Compression Nut**

| Cat. #    | Size | Uni<br>Ctn | Std<br>Pkg | WT/<br>100 |
|-----------|------|------------|------------|------------|
| STREMT50  | 1/2" | 25         | 250        | 15         |
| STREMT75  | 3/4" | 10         | 100        | 22         |
| STREMT100 | 1"   | 5          | 50         | 40         |

# AMERICAN FITTINGS Corporation



Made in the USA Since 1946

LIQUID TIGHT CONNECTORS  
Liquid Tight Conduit to Rigid Conduit - IMC  
Size Range: 1/2" to 1"

## Raintight Combination Couplings *Liquid Tight Conduit to Rigid Conduit-IMC*

- Reusable ferrule
- Steel, zinc plated



UL rated suitable for hazardous locations  
Class I, Div. 2; Class II, Div. 1 and 2;  
Class III, Div. 1 and 2; NEC 501-4(b),  
502-4(a), 503-3(a)

### Combination Coupling (STR-EMT)

| Cat. #      | Size | Uni<br>Ctn | Std<br>Pkg | WT/<br>100 |
|-------------|------|------------|------------|------------|
| STREMT50RT  | 1/2" | 25         | 250        | 15         |
| STREMT75RT  | 3/4" | 10         | 100        | 22         |
| STREMT100RT | 1"   | 5          | 50         | 40         |

## SPEC-grade



Featuring:  
**EZ-Torque Compression Nut**



# AMERICAN FITTINGS Corporation



Made in the USA Since 1946

LIQUID TIGHT CONNECTORS  
with Female Threaded Hubs  
Size Range: 3/8" to 2"

## Liquid Tight Connectors with Female Threaded Hubs

- For Connecting Liquid Tight Conduit with Rigid/IMC Threaded Conduit
- Provides versatility in threaded hub or panelboard applications



## SPEC-grade



Featuring:  
EZ-Torque Compression Nut

| Cat. #   | Size   | Unit Ctn | Std Pkg | WT/ 100 |
|----------|--------|----------|---------|---------|
| STR38FR  | 3/8"   | 25       | 125     | 13      |
| STR50FR  | 1/2"   | 25       | 125     | 14      |
| STR75FR  | 3/4"   | 25       | 125     | 21      |
| STR100FR | 1"     | 5        | 25      | 31      |
| STR125FR | 1 1/4" | 5        | 25      | 56      |
| STR150FR | 1 1/2" | 5        | 25      | 69      |
| STR200FR | 2"     | 5        | 25      | 88      |

## Dimensional Table

| Cat. #   | A    | B      |
|----------|------|--------|
| STR38FR  | 1.08 | 1 1/8" |
| STR50FR  | 1.19 | 1 1/8" |
| STR75FR  | 1.43 | 1 3/8" |
| STR100FR | 1.75 | 1 5/8" |
| STR125FR | 2.16 | 2"     |
| STR150FR | 2.38 | 2 1/4" |
| STR200FR | 2.88 | 2 3/4" |

# AMERICAN FITTINGS Corporation



Made in the USA Since 1946

LIQUID TIGHT CONNECTORS  
Non-Metallic Liquid Tight Connectors Conduit  
Size Range: 3/8" to 2"

## Non-Metallic Liquid Tight Connectors

### For Use with Type B Non-metallic Liquid Tight Conduit

- For use in wet or dry locations where fittings are not subject to harsh physical conditions
- Compact & sturdy PVC fitting furnished with steel locknut and sealing gasket
- NPT Thread
- Corrosion resistant
- Protection from liquid, rain, & oils
- Smooth interior to speed installation and eliminate friction

### Straight Connectors


| Cat. # | Size   | Unit Ctn | Std Pkg | WT/ 100 |
|--------|--------|----------|---------|---------|
| NML38  | 3/8"   | 25       | 125     | 9       |
| NML50  | 1/2"   | 5        | 125     | 8       |
| NML75  | 3/4"   | 10       | 50      | 10      |
| NML100 | 1"     | 10       | 50      | 14      |
| NML125 | 1-1/4" | 5        | 5       | 20      |
| NML150 | 1-1/2" | 4        | 20      | 26      |
| NML200 | 2"     | 2        | 10      | 45      |

### Dimensional Table

| Cat. #   | A    | B    | C    |
|----------|------|------|------|
| NML3890  | 2.56 | 2.14 | 1.09 |
| NML5090  | 2.56 | 2.14 | 1.09 |
| NML7590  | 2.84 | 2.38 | 1.30 |
| NML10090 | 3.25 | 2.81 | 1.50 |
| NML12590 | 3.96 | 3.36 | 2.40 |
| NML15090 | 4.13 | 3.45 | 2.68 |
| NML20090 | 4.68 | 4.04 | 3.35 |

### 90° Connectors

| Cat. #   | Size   | Unit Ctn | Std Pkg | WT/ 100 |
|----------|--------|----------|---------|---------|
| NML3890  | 3/8"   | 10       | 50      | 9       |
| NML5090  | 1/2"   | 10       | 50      | 8       |
| NML7590  | 3/4"   | 10       | 50      | 12      |
| NML10090 | 1"     | 5        | 25      | 18      |
| NML12590 | 1-1/4" | 2        | 10      | 37      |
| NML15090 | 1-1/2" | 2        | 10      | 39      |
| NML20090 | 2"     | 1        | 5       | 70      |

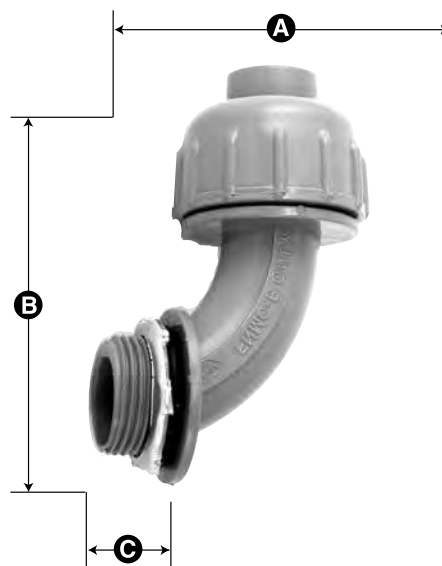

### Dimensional Table

| Cat. # | A Diameter | B Overall Length | C Length of Thread |
|--------|------------|------------------|--------------------|
| NML38  | 1.12       | 2.10             | .45                |
| NML50  | 1.12       | 2.10             | .45                |
| NML75  | 1.30       | 2.20             | .47                |
| NML100 | 1.60       | 2.30             | .57                |
| NML125 | 2.40       | 2.40             | .57                |
| NML150 | 2.60       | 2.75             | .57                |
| NML200 | 3.30       | 3.10             | .67                |

# AMERICAN FITTINGS Corporation



Made in the USA Since 1946

LIQUID TIGHT CONNECTORS  
Flexible Metal MS Connectors  
Canon Type Plug Adaptor  
Size Range: 3/8" to 3/4"

## Liquid Tight Flexible Metal MS Connectors (Canon Type Plug Adaptor)

- UL rated Liquid Tight conduit to female thread
- For industrial applications where liquid tight conduit needs to be connected to female multi pin plug (Canon type)
- Made from corrosion resistant machined steel, zinc plated




E93605



LR61799

## SPEC-grade

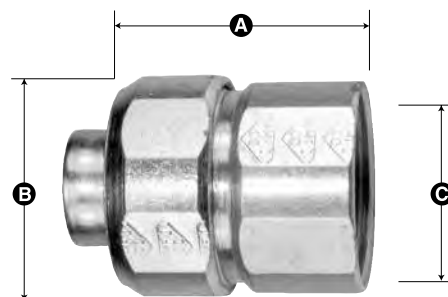

Featuring:  
EZ-Torque Compression Nut

### Dimensional Table

| Cat. #     | A    | B    | C   |
|------------|------|------|-----|
| STR38807MS | 1.32 | 1.06 | .50 |
| STR3814MS  | 1.32 | 1.06 | .50 |
| STR3818MS  | 1.32 | 1.06 | .50 |
| STR5018MS  | 1.32 | 1.13 | .53 |
| STR5020MS  | 1.38 | 1.13 | .66 |
| STR7520MS  | 1.38 | 1.43 | .67 |

| Cat. #     | Size | AN-MS Conn<br>Shell Size | Thread Size        | Unit<br>Ctn | Std<br>Pkg | WT/<br>100 |
|------------|------|--------------------------|--------------------|-------------|------------|------------|
| STR38807MS | 3/8" |                          | 20.5mm x 1.25mm    | 25          | 125        | 10         |
| STR3814MS  | 3/8" | 14, 14S                  | 3/4"-20 UNEF 2B    | 25          | 125        | 10         |
| STR3818MS  | 3/8" | 18                       | 1"-20 UNEF 2B      | 25          | 125        | 10         |
| STR5018MS  | 1/2" | 18                       | 1"-20 UNEF 2B      | 25          | 125        | 14         |
| STR5020MS  | 1/2" | 20, 22                   | 1-3/16"-18 UNEF 2B | 20          | 100        | 16         |
| STR7520MS  | 3/4" | 20, 22                   | 1-3/16"-18 UNEF 2B | 20          | 100        | 18         |

\* Also available with stainless steel mesh

### Raintight

| Cat. #       | Size | AN-MS Conn<br>Shell Size | Thread Size        | Unit<br>Ctn | Std<br>Pkg | WT/<br>100 |
|--------------|------|--------------------------|--------------------|-------------|------------|------------|
| STR38807MSRT | 3/8" |                          | 20.5mm x 1.25mm    | 25          | 125        | 10         |
| STR3814MSRT  | 3/8" | 14, 14S                  | 3/4"-20 UNEF 2B    | 25          | 125        | 10         |
| STR3818MSRT  | 3/8" | 18                       | 1"-20 UNEF 2B      | 25          | 125        | 10         |
| STR5018MSRT  | 1/2" | 18                       | 1"-20 UNEF 2B      | 25          | 125        | 14         |
| STR5020MSRT  | 1/2" | 20, 22                   | 1-3/16"-18 UNEF 2B | 20          | 100        | 16         |
| STR7520MSRT  | 3/4" | 20, 22                   | 1-3/16"-18 UNEF 2B | 20          | 100        | 18         |



## Liquid Tight Connectors with Female Threaded Hubs and Chase Nipples

- For connecting liquid tight conduit into electrical box - inside low profile
- Provides versatility in threaded hub or panelboard applications
- Includes a sealing washer



### Liquid Tight Female Hub

| Cat. #     | Size   | Unit Ctn | Std Pkg | WT/ 100 |
|------------|--------|----------|---------|---------|
| STR38FRCN  | 3/8"   | 25       | 125     | 16      |
| STR50FRCN  | 1/2"   | 25       | 125     | 17      |
| STR75FRCN  | 3/4"   | 25       | 125     | 25      |
| STR100FRCN | 1"     | 5        | 25      | 40      |
| STR125FRCN | 1 1/4" | 5        | 25      | 73      |
| STR150FRCN | 1 1/2" | 5        | 25      | 90      |
| STR200FRCN | 2"     | 5        | 25      | 117     |

### Dimensional Table

| Cat. #     | A    | B    | C   | D        |
|------------|------|------|-----|----------|
| STR38FRCN  | 1.09 | 1.14 | .16 | 1"       |
| STR50FRCN  | 1.19 | 1.21 | .16 | 1"       |
| STR75FRCN  | 1.43 | 1.24 | .16 | 1 1/4"   |
| STR100FRCN | 1.75 | 1.57 | .19 | 1 5/8"   |
| STR125FRCN | 2.16 | 1.86 | .20 | 1 7/8"   |
| STR150FRCN | 2.38 | 1.97 | .25 | 2 3/16"  |
| STR200FRCN | 2.88 | 2.07 | .25 | 2 11/16" |

## SPEC-grade




Featuring:  
EZ-Torque Compression Nut



## Sealing Washers

- Polyethylene
- Moisture resistant

## SPEC-grade

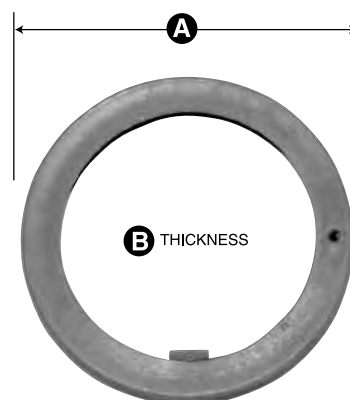

| Cat. # | Size   | Std Pkg | WT/ 100 |
|--------|--------|---------|---------|
| SW50   | 1/2"   | 500     | .5      |
| SW75   | 3/4"   | 500     | .5      |
| SW100  | 1"     | 250     | 1       |
| SW125  | 1-1/4" | 250     | 1       |
| SW150  | 1-1/2" | 250     | 1       |
| SW200  | 2"     | 250     | 2       |
| SW250  | 2-1/2" | 100     | 2       |
| SW300  | 3"     | 100     | 2       |
| SW350  | 3-1/2" | 50      | 2       |
| SW400  | 4"     | 50      | 2       |

## Dimensional Table

| Cat. # | A Diameter | B Thickness |
|--------|------------|-------------|
| SW50   | 1.10       | .075        |
| SW75   | 1.34       | .080        |
| SW100  | 1.60       | .080        |
| SW125  | 1.93       | .080        |
| SW150  | 2.20       | .080        |
| SW200  | 2.57       | .080        |
| SW250  | 2.88       | .125        |
| SW300  | 3.52       | .125        |
| SW350  | 4.03       | .125        |
| SW400  | 4.52       | .125        |



## Liquid Tight Ferrules Replacements

- Reusable
- Steel, zinc plated
- For improved sealing and grounding

**SPEC-grade**



## Replacement Ferrules


| Cat. #  | Size   | Unit Ctn | Std Pkg | WT/ 100 |
|---------|--------|----------|---------|---------|
| STR38F  | 3/8"   | 100      | 500     | 2       |
| STR50F  | 1/2"   | 100      | 500     | 2       |
| STR75F  | 3/4"   | 100      | 500     | 3       |
| STR100F | 1"     | 50       | 250     | 3       |
| STR125F | 1-1/4" | 25       | 125     | 5       |
| STR150F | 1-1/2" | 10       | 50      | 6       |
| STR200F | 2"     | 5        | 25      | 11      |
| STR250F | 2-1/2" | -        | 1       | 23      |
| STR300F | 3"     | -        | 1       | 16      |
| STR350F | 3-1/2" | -        | 1       | 50      |
| STR400F | 4"     | -        | 1       | 38      |





## Solderless Lugs - Copper and Aluminum

- Lay-in connectors
- High strength, high conductive

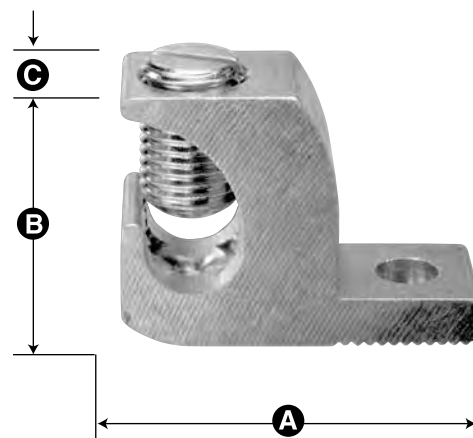

### Aluminum Alloy 6061

| Cat. # | Wire Range<br>CU-AL | Unit<br>Ctn | Std<br>Pkg | WT/<br>100 |
|--------|---------------------|-------------|------------|------------|
| GLA4   | 4-14                | 50          | 500        | 2          |
| GLA0   | 1/0-8               | 25          | 250        | 7          |
| GLA250 | 250 mcm-6           | 10          | 100        | 19         |

### Dimensional Table

| Cat. # | A    | B    | C   |
|--------|------|------|-----|
| GLA4   | 1.07 | .75  | .38 |
| GLA0   | 1.50 | 1.10 | .60 |
| GLA250 | 2.20 | 1.70 | .80 |

### Copper

| Cat. # | Wire Range<br>CU-AL | Unit<br>Ctn | Std<br>Pkg | WT/<br>100 |
|--------|---------------------|-------------|------------|------------|
| GLCU4  | 4-14                | 50          | 500        | 6          |
| GLCU2  | 2-8                 | 50          | 500        | 5          |

### Dimensional Table

| Cat. # | A    | B   | C   |
|--------|------|-----|-----|
| GLCU4  | 1.30 | .88 | .40 |
| GLCU2  | 1.47 | .92 | .48 |

# AMERICAN FITTINGS Corporation



Made in the USA Since 1946

LIQUID TIGHT CONNECTORS  
Reusable Fittings / Straight Connectors  
Size Range: 3/8" to 5"

## Liquid Tight Connectors Reusable Fittings

- Industrial specification grade, screw machined steel, zinc plated
- UL Rated Liquid Tight
- Includes sealing washer
- Bonds conduit to box or enclosure
- Corrosion resistant protection from moisture & oils
- Designed to protect against excessive vibration

### Straight Connectors (STR)

| Cat. #   | Size   | Unit Ctn | Std Pkg | WT/ 100 |
|----------|--------|----------|---------|---------|
| STR38    | 3/8"   | 20       | 200     | 10      |
| STR50    | 1/2"   | 20       | 200     | 13      |
| STR75    | 3/4"   | 20       | 100     | 18      |
| STR100   | 1"     | 5        | 50      | 32      |
| STR125   | 1-1/4" | 5        | 25      | 44      |
| STR150   | 1-1/2" | 5        | 25      | 66      |
| STR200   | 2"     | 5        | 25      | 85      |
| STR250** | 2-1/2" | -        | 5       | 260     |
| STR300** | 3"     | -        | 4       | 360     |
| STR350** | 3-1/2" | -        | 4       | 445     |
| STR400** | 4"     | -        | 2       | 520     |
| STR500** | 5"     | -        | 1       | 1150    |

6" connectors available upon request

\*\* Malleable Iron

### Dimensional Table

| Cat. #   | A<br>Diameter | B<br>Overall Length | C<br>Length of Thread |
|----------|---------------|---------------------|-----------------------|
| STR38/B  | 1.09          | 1.19                | .63                   |
| STR50/B  | 1.19          | 1.34                | .63                   |
| STR75/B  | 1.43          | 1.43                | .63                   |
| STR100/B | 1.75          | 1.63                | .66                   |
| STR125/B | 2.16          | 1.84                | .67                   |
| STR150/B | 2.38          | 2.00                | .72                   |
| STR200/B | 2.88          | 2.13                | .72                   |
| STR250/B | 4.00          | 3.25                | 1.50                  |
| STR300/B | 4.63          | 3.88                | 1.50                  |
| STR350/B | 5.50          | 4.00                | 1.50                  |
| STR400/B | 5.82          | 4.00                | 1.63                  |
| STR500/B | 7.00          | 5.00                | 1.63                  |

## SPEC-grade



E93605



LR61799

UL rated suitable for hazardous locations  
Class I, Div. 2; Class II, Div. 1 and 2;  
Class III, Div. 1 and 2; NEC 501-4(b), 505-4(a), 503-3(a)

Featuring:  
**EZ-Torque Compression Nut**

### Straight Connectors with Insulated Throat

| Cat. #    | Size   | Unit Ctn | Std Pkg | WT/ 100 |
|-----------|--------|----------|---------|---------|
| STR38B    | 3/8"   | 20       | 200     | 10      |
| STR50B    | 1/2"   | 20       | 200     | 13      |
| STR75B    | 3/4"   | 20       | 100     | 18      |
| STR100B   | 1"     | 5        | 50      | 32      |
| STR125B   | 1-1/4" | 5        | 25      | 44      |
| STR150B   | 1-1/2" | 5        | 25      | 66      |
| STR200B   | 2"     | 5        | 25      | 85      |
| STR250B** | 2-1/2" | -        | 5       | 260     |
| STR300B** | 3"     | -        | 4       | 360     |
| STR350B** | 3-1/2" | -        | 4       | 445     |
| STR400B** | 4"     | -        | 2       | 520     |
| STR500B** | 5"     | -        | 1       | 1150    |

6" connectors available upon request

\*\* Malleable Iron

# AMERICAN FITTINGS Corporation



Made in the USA Since 1946

LIQUID TIGHT CONNECTORS  
90° Angle Connectors  
Size Range: 3/8" to 4"

## Liquid Tight Connectors 90° Reusable Fittings

- Industrial specification grade steel, zinc plated
- Malleable iron body
- UL rated Liquid Tight
- Includes sealing washer
- Bonds conduit to box or enclosure
- Corrosion resistant protection from moisture & oils
- Designed to protect against excessive vibration

### 90° Angle Connectors (STR)


| Cat. #     | Size   | Unit Ctn | Std Pkg | WT/ 100 |
|------------|--------|----------|---------|---------|
| STR3890**  | 3/8"   | 10       | 100     | 24      |
| STR5090**  | 1/2"   | 10       | 100     | 24      |
| STR7590**  | 3/4"   | 5        | 50      | 38      |
| STR10090** | 1"     | 5        | 25      | 70      |
| STR12590** | 1-1/4" | 2        | 20      | 88      |
| STR15090** | 1-1/2" | 1        | 10      | 125     |
| STR20090** | 2"     | 1        | 5       | 180     |
| STR25090   | 2-1/2" | -        | 2       | 625     |
| STR30090   | 3"     | -        | 1       | 900     |
| STR35090   | 3-1/2" | -        | 1       | 1000    |
| STR40090   | 4"     | -        | 2       | 1500    |

\*\*Steel Nut

### Dimensional Table

| Cat. #     | A     | B     | C<br>Length<br>of Thread | D<br>Ø |
|------------|-------|-------|--------------------------|--------|
| STR3890/B  | 1.25  | 1.59  | .59                      | 1.09   |
| STR5090/B  | 1.25  | 1.66  | .59                      | 1.19   |
| STR7590/B  | 1.53  | 1.78  | .59                      | 1.43   |
| STR10090/B | 1.84  | 2.19  | .66                      | 1.75   |
| STR12590/B | 1.94  | 2.38  | .69                      | 2.16   |
| STR15090/B | 2.09  | 2.63  | .72                      | 2.38   |
| STR20090/B | 2.41  | 3.06  | .72                      | 2.88   |
| STR25090/B | 8.00  | 9.25  | 1.50                     | ?      |
| STR30090/B | 8.75  | 10.50 | 1.50                     | ?      |
| STR35090/B | 10.93 | 11.50 | 1.50                     | ?      |
| STR40090/B | 12.63 | 13.00 | 1.50                     | ?      |

## SPEC-grade

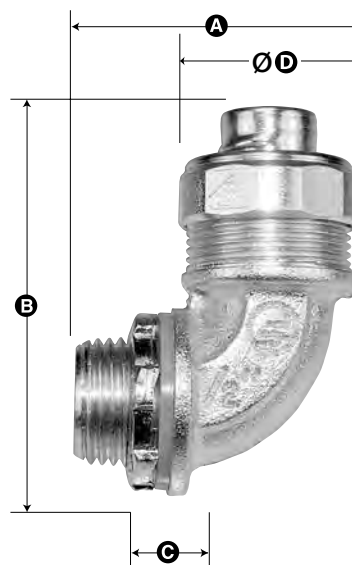

E93605



LR61799

UL rated suitable for hazardous locations  
Class I, Div. 2; Class II, Div. 1 and 2;  
Class III, Div. 1 and 2; NEC 501-4(b), 505-4(a), 503-3(a)

Featuring:  
**EZ-Torque Compression Nut**

### 90° Angle Connectors with Insulated Throat

| Cat. #      | Size   | Unit Ctn | Std Pkg | WT/ 100 |
|-------------|--------|----------|---------|---------|
| STR3890B**  | 3/8"   | 10       | 100     | 24      |
| STR5090B**  | 1/2"   | 10       | 100     | 24      |
| STR7590B**  | 3/4"   | 5        | 50      | 38      |
| STR10090B** | 1"     | 5        | 25      | 70      |
| STR12590B** | 1-1/4" | 2        | 20      | 88      |
| STR15090B** | 1-1/2" | 1        | 10      | 125     |
| STR20090B** | 2"     | 1        | 5       | 180     |
| STR25090B   | 2-1/2" | -        | 2       | 625     |
| STR30090B   | 3"     | -        | 1       | 900     |
| STR35090B   | 3-1/2" | -        | 1       | 1000    |
| STR40090B   | 4"     | -        | 2       | 1500    |

\*\*Steel Nut

# AMERICAN FITTINGS Corporation



Made in the USA Since 1946

LIQUID TIGHT CONNECTORS  
45° Angle Connectors  
Size Range: 3/8" to 4"

## Liquid Tight Connectors 45° Reusable Fittings

- Industrial specification grade steel, zinc plated
- Malleable iron body
- UL rated Liquid Tight
- Includes sealing washer
- Bonds conduit to box or enclosure
- Corrosion resistant protection from moisture & oils
- Designed to protect against excessive vibration

### 45° Angle Connectors (STR)


| Cat. #     | Size   | Unit Ctn | Std Pkg | WT/ 100 |
|------------|--------|----------|---------|---------|
| STR3845**  | 3/8"   | 10       | 100     | 21      |
| STR5045**  | 1/2"   | 10       | 100     | 23      |
| STR7545**  | 3/4"   | 10       | 50      | 32      |
| STR10045** | 1"     | 5        | 50      | 53      |
| STR12545** | 1-1/4" | 5        | 25      | 69      |
| STR15045** | 1-1/2" | 3        | 15      | 99      |
| STR20045** | 2"     | 1        | 10      | 152     |
| STR25045   | 2-1/2" | -        | 2       | 478     |
| STR30045   | 3"     | -        | 2       | 775     |
| STR35045   | 3-1/2" | -        | 1       | 880     |
| STR40045   | 4"     | -        | 1       | 1000    |

\*\* Steel Nut

### Dimensional Table

| Cat. #     | A<br>Length of Thread | B    | C    | D    |
|------------|-----------------------|------|------|------|
| STR3845/B  | .59                   | 1.09 | 1.22 | 1.03 |
| STR5045/B  | .59                   | 1.19 | 1.32 | 1.03 |
| STR7545/B  | .59                   | 1.43 | 1.38 | 1.13 |
| STR10045/B | .66                   | 1.75 | 1.66 | 1.25 |
| STR12545/B | .69                   | 2.16 | 1.72 | 1.34 |
| STR15045/B | .72                   | 2.38 | 2.00 | 1.47 |
| STR20045/B | .72                   | 2.88 | 2.28 | 1.63 |
| STR25045/B | 1.50                  | 4.00 | 2.25 | 4.75 |
| STR30045/B | 1.50                  | 4.63 | 2.50 | 5.50 |
| STR35045/B | 1.56                  | 5.25 | 2.50 | 6.50 |
| STR40045/B | 1.63                  | 5.81 | 2.50 | 7.75 |

## SPEC-grade

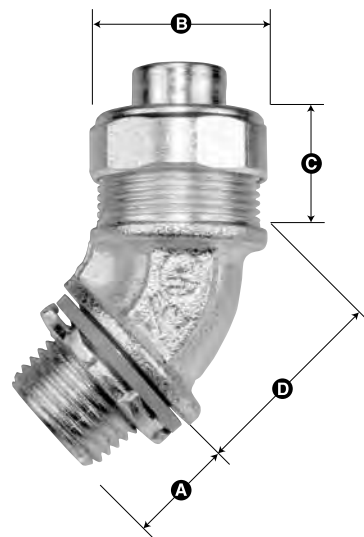

E93605



LR61799

UL rated suitable for hazardous locations  
Class I, Div. 2; Class II, Div. 1 and 2;  
Class III, Div. 1 and 2; NEC 501-4(b), 502-4(a), 503-3(a)

Featuring:  
**EZ-Torque Compression Nut**

### 45° Angle Connectors with Insulated Throat

| Cat. #      | Size   | Unit Ctn | Std Pkg | WT/ 100 |
|-------------|--------|----------|---------|---------|
| STR3845B**  | 3/8"   | 10       | 100     | 21      |
| STR5045B**  | 1/2"   | 10       | 100     | 23      |
| STR7545B**  | 3/4"   | 10       | 50      | 32      |
| STR10045B** | 1"     | 5        | 50      | 53      |
| STR12545B** | 1-1/4" | 5        | 25      | 69      |
| STR15045B** | 1-1/2" | 3        | 15      | 99      |
| STR20045B** | 2"     | 1        | 10      | 152     |
| STR25045B   | 2-1/2" | -        | 2       | 478     |
| STR30045B   | 3"     | -        | 2       | 775     |
| STR35045B   | 3-1/2" | -        | 1       | 880     |
| STR40045B   | 4"     | -        | 1       | 1000    |

\*\* Steel Nut

# AMERICAN FITTINGS Corporation



Made in the USA Since 1946

LIQUID TIGHT CONNECTORS  
Grounding Type with Aluminum Lugs  
Size Range: 3/8" to 4"

## Liquid Tight Connectors Grounding Type with Aluminum Lugs

- A quick, effective solution to connecting liquid tight conduit while terminating a bonding connector in one action
- Sleek screw machined bodies and nuts promote easy installation
- Strong construction and long ferrule prevent pullouts
- All components are reusable
- Furnished with locknut and sealing washer


### Straight Connectors (STR)

| Cat. #   | Size   | Unit Ctn | Std Pkg | WT/ 100 |
|----------|--------|----------|---------|---------|
| STR38GL  | 3/8"   | 25       | 125     | 12      |
| STR50GL  | 1/2"   | 25       | 125     | 15      |
| STR75GL  | 3/4"   | 25       | 125     | 20      |
| STR100GL | 1"     | 10       | 50      | 34      |
| STR125GL | 1-1/4" | 5        | 25      | 46      |
| STR150GL | 1-1/2" | 5        | 25      | 68      |
| STR200GL | 2"     | 2        | 10      | 87      |
| STR250GL | 2-1/2" | -        | 5       | 267     |
| STR300GL | 3"     | -        | 4       | 367     |
| STR350GL | 3-1/2" | -        | 3       | 464     |
| STR400GL | 4"     | -        | 2       | 539     |

### Dimensional Table

| Cat. #   | A<br>Diameter | B<br>Overall Length | C<br>Length of Thread | D<br>Length of Lug | Wire Size |     |
|----------|---------------|---------------------|-----------------------|--------------------|-----------|-----|
|          |               |                     |                       |                    | Min       | Max |
| STR38GL  | 1.09          | 1.19                | .63                   | .750               | 14        | 4   |
| STR50GL  | 1.19          | 1.34                | .63                   | .750               | 14        | 4   |
| STR75GL  | 1.43          | 1.43                | .63                   | .750               | 14        | 4   |
| STR100GL | 1.75          | 1.63                | .66                   | .750               | 14        | 4   |
| STR125GL | 2.16          | 1.84                | .67                   | .750               | 14        | 4   |
| STR150GL | 2.38          | 2.00                | .72                   | .750               | 14        | 4   |
| STR200GL | 2.88          | 2.13                | .72                   | .750               | 14        | 4   |
| STR250GL | 4.00          | 3.25                | 1.50                  | 1.093              | 8         | 110 |
| STR300GL | 4.63          | 3.88                | 1.50                  | 1.093              | 8         | 110 |
| STR350GL | 5.50          | 4.00                | 1.50                  | 1.687              | 6         | 250 |
| STR400GL | 5.82          | 4.00                | 1.63                  | 1.687              | 6         | 250 |

## SPEC-grade

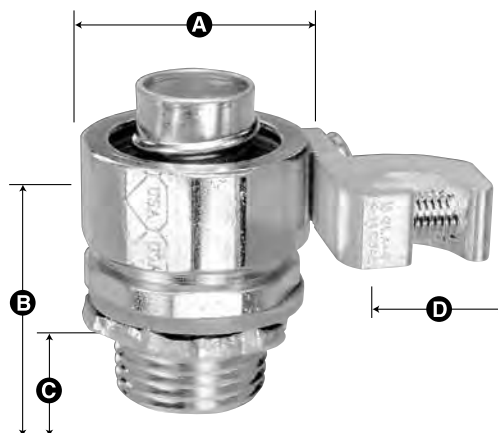

UL rated suitable for hazardous locations  
Class I, Div. 2; Class II, Div. 1 and 2;  
Class III, Div. 1 and 2; NEC 501-4(b), 502-4(a), 503-3(a)

Featuring:  
**EZ-Torque Compression Nut**

### Straight Connectors with Insulated Throat

| Cat. #    | Size   | Unit Ctn | Std Pkg | WT/ 100 |
|-----------|--------|----------|---------|---------|
| STR38BGL  | 3/8"   | 25       | 125     | 12      |
| STR50BGL  | 1/2"   | 25       | 125     | 15      |
| STR75BGL  | 3/4"   | 25       | 125     | 20      |
| STR100BGL | 1"     | 10       | 50      | 34      |
| STR125BGL | 1-1/4" | 5        | 25      | 46      |
| STR150BGL | 1-1/2" | 5        | 25      | 68      |
| STR200BGL | 2"     | 2        | 10      | 87      |
| STR250BGL | 2-1/2" | -        | 5       | 267     |
| STR300BGL | 3"     | -        | 4       | 367     |
| STR350BGL | 3-1/2" | -        | 3       | 464     |
| STR400BGL | 4"     | -        | 2       | 539     |

# AMERICAN FITTINGS Corporation



Made in the USA Since 1946

LIQUID TIGHT CONNECTORS  
Grounding Type with Aluminum Lugs: 90° Angle  
Size Range: 3/8" to 4"

## Liquid Tight Connectors 90° Grounding Type with Aluminum Lugs


- A quick, effective solution to connecting liquid tight conduit while terminating a bonding connector in one action
- Strong construction and long ferrule prevent pullouts
- All components are reusable
- Furnished with locknut and sealing washer

### 90° Angle Connectors (STR)

| Cat. #     | Size   | Unit Ctn | Std Pkg | WT/ 100 |
|------------|--------|----------|---------|---------|
| STR3890GL  | 3/8"   | 20       | 100     | 26      |
| STR5090GL  | 1/2"   | 20       | 100     | 26      |
| STR7590GL  | 3/4"   | 10       | 50      | 40      |
| STR10090GL | 1"     | 5        | 25      | 72      |
| STR12590GL | 1-1/4" | 4        | 20      | 90      |
| STR15090GL | 1-1/2" | 3        | 15      | 127     |
| STR20090GL | 2"     | 2        | 10      | 182     |
| STR25090GL | 2-1/2" | -        | 2       | 632     |
| STR30090GL | 3"     | -        | 1       | 907     |
| STR35090GL | 3-1/2" | -        | 1       | 1019    |
| STR40090GL | 4"     | -        | 2       | 1519    |

### 90° Angle Connectors with Insulated Throat

| Cat. #     | Size   | Unit Ctn | Std Pkg | WT/ 100 |
|------------|--------|----------|---------|---------|
| STR3890GL  | 3/8"   | 20       | 100     | 26      |
| STR5090GL  | 1/2"   | 20       | 100     | 26      |
| STR7590GL  | 3/4"   | 10       | 50      | 40      |
| STR10090GL | 1"     | 5        | 25      | 72      |
| STR12590GL | 1-1/4" | 4        | 20      | 90      |
| STR15090GL | 1-1/2" | 3        | 15      | 127     |
| STR20090GL | 2"     | 2        | 10      | 182     |
| STR25090GL | 2-1/2" | -        | 2       | 632     |
| STR30090GL | 3"     | -        | 1       | 907     |
| STR35090GL | 3-1/2" | -        | 1       | 1019    |
| STR40090GL | 4"     | -        | 2       | 1519    |

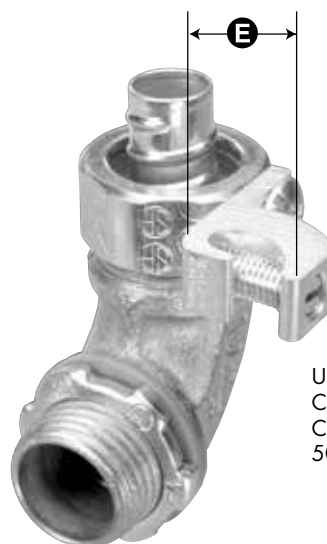


**SPEC-grade**



E258095

UL rated suitable for hazardous locations  
Class I, Div. 2; Class II, Div. 1 and 2;  
Class III, Div. 1 and 2; NEC 501-4(b),  
502-4(a), 503-3(a)

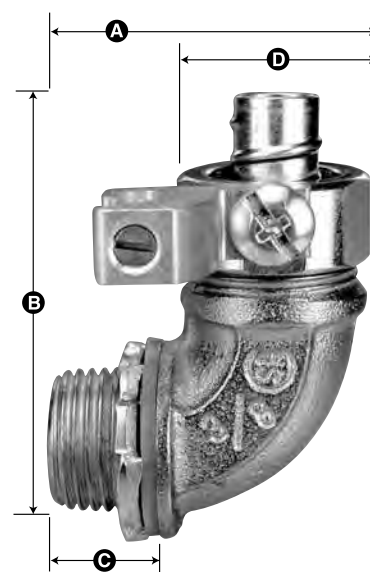

Featuring:  
**EZ-Torque Compression Nut**

### Dimensional Table

| Cat. #     | A     | B     | C    | D    | E     | Wire Min | Size Max |
|------------|-------|-------|------|------|-------|----------|----------|
| STR3890GL  | 1.25  | 1.59  | .59  | 1.09 | .750  | 14       | 4        |
| STR5090GL  | 1.25  | 1.66  | .59  | 1.19 | .750  | 14       | 4        |
| STR7590GL  | 1.53  | 1.78  | .59  | 1.43 | .750  | 14       | 4        |
| STR10090GL | 1.84  | 2.19  | .66  | 1.75 | .750  | 14       | 4        |
| STR12590GL | 1.94  | 2.38  | .69  | 2.16 | .750  | 14       | 4        |
| STR15090GL | 2.09  | 2.63  | .72  | 2.38 | .750  | 14       | 4        |
| STR20090GL | 2.41  | 3.06  | .72  | 2.88 | .750  | 14       | 4        |
| STR25090GL | 8.00  | 9.25  | 1.50 | 4.00 | 1.093 | 8        | 110      |
| STR30090GL | 8.75  | 10.50 | 1.50 | 4.63 | 1.093 | 8        | 110      |
| STR35090GL | 10.93 | 11.50 | 1.50 | 5.50 | 1.687 | 6        | 250      |
| STR40090GL | 12.63 | 13.00 | 1.50 | 5.82 | 1.687 | 6        | 250      |



# AMERICAN FITTINGS Corporation



Made in the USA Since 1946

LIQUID TIGHT CONNECTORS  
Grounding Type with Aluminum Lugs: 45° Angle  
Size Range: 3/8" to 4"

## Liquid Tight Connectors 45° Grounding Type with Aluminum Lugs

- A quick, effective solution to connecting liquid tight conduit while terminating a bonding connector in one action
- Strong construction and long ferrule prevent pullouts
- All components are reusable
- Furnished with locknut and sealing washer

### 45° Angle Connectors (STR)

| Cat. #     | Size   | Unit Ctn | Std Pkg | WT/ 100 |
|------------|--------|----------|---------|---------|
| STR3845GL  | 3/8"   | 20       | 100     | 23      |
| STR5045GL  | 1/2"   | 20       | 100     | 25      |
| STR7545GL  | 3/4"   | 10       | 50      | 34      |
| STR10045GL | 1"     | 5        | 25      | 55      |
| STR12545GL | 1-1/4" | 4        | 20      | 71      |
| STR15045GL | 1-1/2" | 3        | 15      | 101     |
| STR20045GL | 2"     | 2        | 10      | 154     |
| STR25045GL | 2-1/2" | -        | 4       | 485     |
| STR30045GL | 3"     | -        | 2       | 782     |
| STR35045GL | 3-1/2" | -        | 2       | 899     |
| STR40045GL | 4"     | -        | 1       | 1019    |

### 45° Angle Connectors with Insulated Throat


| Cat. #      | Size   | Unit Ctn | Std Pkg | WT/ 100 |
|-------------|--------|----------|---------|---------|
| STR3845BGL  | 3/8"   | 20       | 100     | 23      |
| STR5045BGL  | 1/2"   | 20       | 100     | 25      |
| STR7545BGL  | 3/4"   | 10       | 50      | 34      |
| STR10045BGL | 1"     | 5        | 25      | 55      |
| STR12545BGL | 1-1/4" | 4        | 20      | 71      |
| STR15045BGL | 1-1/2" | 3        | 15      | 101     |
| STR20045BGL | 2"     | 2        | 10      | 154     |
| STR25045BGL | 2-1/2" | -        | 4       | 485     |
| STR30045BGL | 3"     | -        | 2       | 782     |
| STR35045BGL | 3-1/2" | -        | 2       | 899     |
| STR40045BGL | 4"     | -        | 1       | 1019    |



**SPEC-grade**



UL rated suitable for hazardous locations  
Class I, Div. 2; Class II, Div. 1 and 2;  
Class III, Div. 1 and 2; NEC 501-4(b),  
502-4(a), 503-3(a)

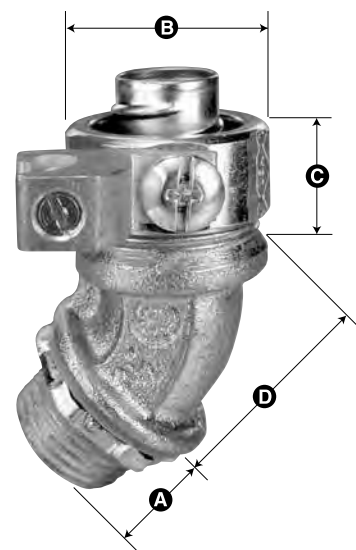

Featuring:  
EZ-Torque Compression Nut

### Dimensional Table

| Cat. #     | A    | B    | C    | D    | E     |
|------------|------|------|------|------|-------|
| STR3845GL  | .59  | 1.09 | 1.22 | 1.03 | .750  |
| STR5045GL  | .59  | 1.19 | 1.32 | 1.03 | .750  |
| STR7545GL  | .59  | 1.43 | 1.38 | 1.13 | .750  |
| STR10045GL | .66  | 1.75 | 1.66 | 1.25 | .750  |
| STR12545GL | .69  | 2.16 | 1.72 | 1.34 | .750  |
| STR15045GL | .72  | 2.38 | 2.00 | 1.47 | .750  |
| STR20045GL | .72  | 2.88 | 2.28 | 1.63 | .750  |
| STR25045GL | 1.50 | 4.00 | 2.25 | 4.75 | 1.093 |
| STR30045GL | 1.50 | 4.63 | 2.50 | 5.50 | 1.093 |
| STR35045GL | 1.56 | 5.25 | 2.50 | 6.50 | 1.687 |
| STR40045GL | 1.63 | 5.81 | 2.50 | 7.75 | 1.687 |

# AMERICAN FITTINGS Corporation



Made in the USA Since 1946

LIQUID TIGHT CONNECTORS  
Liquid Tight Conduit to EMT  
Size Range: 1/2" to 1"

## Combination Couplings *Liquid Tight Conduit to EMT*

- Reusable ferrule
- For rooftop HVAC air conditioners and motor hook-ups
- Steel, zinc plated



UL rated suitable for hazardous locations  
Class I, Div. 2; Class II, Div. 1 and 2;  
Class III, Div. 1 and 2; NEC 501-4(b),  
502-4(a), 503-3(a)

**SPEC-*grade***



Featuring:  
**EZ-Torque Compression Nut**

| Cat. #    | Size | Uni<br>Ctn | Std<br>Pkg | WT/<br>100 |
|-----------|------|------------|------------|------------|
| STREMT50  | 1/2" | 25         | 250        | 15         |
| STREMT75  | 3/4" | 10         | 100        | 22         |
| STREMT100 | 1"   | 5          | 50         | 40         |

# AMERICAN FITTINGS Corporation



Made in the USA Since 1946

LIQUID TIGHT CONNECTORS  
Liquid Tight Conduit to Rigid Conduit - IMC  
Size Range: 1/2" to 1"

## Raintight Combination Couplings *Liquid Tight Conduit to Rigid Conduit-IMC*

- Reusable ferrule
- Steel, zinc plated



UL rated suitable for hazardous locations  
Class I, Div. 2; Class II, Div. 1 and 2;  
Class III, Div. 1 and 2; NEC 501-4(b),  
502-4(a), 503-3(a)

### Combination Coupling (STR-EMT)

| Cat. #      | Size | Uni<br>Ctn | Std<br>Pkg | WT/<br>100 |
|-------------|------|------------|------------|------------|
| STREMT50RT  | 1/2" | 25         | 250        | 15         |
| STREMT75RT  | 3/4" | 10         | 100        | 22         |
| STREMT100RT | 1"   | 5          | 50         | 40         |

## SPEC-grade



Featuring:  
**EZ-Torque Compression Nut**

# AMERICAN FITTINGS Corporation



Made in the USA Since 1946

LIQUID TIGHT CONNECTORS  
with Female Threaded Hubs  
Size Range: 3/8" to 2"

## Liquid Tight Connectors with Female Threaded Hubs

- For Connecting Liquid Tight Conduit with Rigid/IMC Threaded Conduit
- Provides versatility in threaded hub or panelboard applications



## SPEC-grade



Featuring:  
EZ-Torque Compression Nut

| Cat. #   | Size   | Unit Ctn | Std Pkg | WT/ 100 |
|----------|--------|----------|---------|---------|
| STR38FR  | 3/8"   | 25       | 125     | 13      |
| STR50FR  | 1/2"   | 25       | 125     | 14      |
| STR75FR  | 3/4"   | 25       | 125     | 21      |
| STR100FR | 1"     | 5        | 25      | 31      |
| STR125FR | 1 1/4" | 5        | 25      | 56      |
| STR150FR | 1 1/2" | 5        | 25      | 69      |
| STR200FR | 2"     | 5        | 25      | 88      |

## Dimensional Table

| Cat. #   | A    | B      |
|----------|------|--------|
| STR38FR  | 1.08 | 1 1/8" |
| STR50FR  | 1.19 | 1 1/8" |
| STR75FR  | 1.43 | 1 3/8" |
| STR100FR | 1.75 | 1 5/8" |
| STR125FR | 2.16 | 2"     |
| STR150FR | 2.38 | 2 1/4" |
| STR200FR | 2.88 | 2 3/4" |

# AMERICAN FITTINGS Corporation



Made in the USA Since 1946

LIQUID TIGHT CONNECTORS  
Non-Metallic Liquid Tight Connectors Conduit  
Size Range: 3/8" to 2"

## Non-Metallic Liquid Tight Connectors

*For Use with Type B Non-metallic Liquid Tight Conduit*

- For use in wet or dry locations where fittings are not subject to harsh physical conditions
- Compact & sturdy PVC fitting furnished with steel locknut and sealing gasket
- NPT Thread
- Corrosion resistant
- Protection from liquid, rain, & oils
- Smooth interior to speed installation and eliminate friction

### Straight Connectors


| Cat. # | Size   | Unit Ctn | Std Pkg | WT/ 100 |
|--------|--------|----------|---------|---------|
| NML38  | 3/8"   | 25       | 125     | 9       |
| NML50  | 1/2"   | 5        | 125     | 8       |
| NML75  | 3/4"   | 10       | 50      | 10      |
| NML100 | 1"     | 10       | 50      | 14      |
| NML125 | 1-1/4" | 5        | 5       | 20      |
| NML150 | 1-1/2" | 4        | 20      | 26      |
| NML200 | 2"     | 2        | 10      | 45      |

### Dimensional Table

| Cat. #   | A    | B    | C    |
|----------|------|------|------|
| NML3890  | 2.56 | 2.14 | 1.09 |
| NML5090  | 2.56 | 2.14 | 1.09 |
| NML7590  | 2.84 | 2.38 | 1.30 |
| NML10090 | 3.25 | 2.81 | 1.50 |
| NML12590 | 3.96 | 3.36 | 2.40 |
| NML15090 | 4.13 | 3.45 | 2.68 |
| NML20090 | 4.68 | 4.04 | 3.35 |

### 90° Connectors

| Cat. #   | Size   | Unit Ctn | Std Pkg | WT/ 100 |
|----------|--------|----------|---------|---------|
| NML3890  | 3/8"   | 10       | 50      | 9       |
| NML5090  | 1/2"   | 10       | 50      | 8       |
| NML7590  | 3/4"   | 10       | 50      | 12      |
| NML10090 | 1"     | 5        | 25      | 18      |
| NML12590 | 1-1/4" | 2        | 10      | 37      |
| NML15090 | 1-1/2" | 2        | 10      | 39      |
| NML20090 | 2"     | 1        | 5       | 70      |

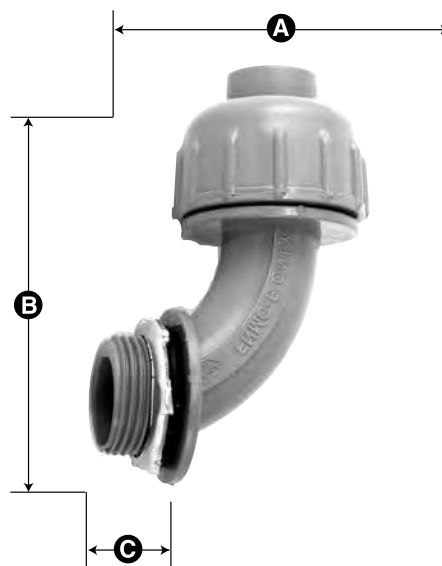

### Dimensional Table

| Cat. # | A Diameter | B Overall Length | C Length of Thread |
|--------|------------|------------------|--------------------|
| NML38  | 1.12       | 2.10             | .45                |
| NML50  | 1.12       | 2.10             | .45                |
| NML75  | 1.30       | 2.20             | .47                |
| NML100 | 1.60       | 2.30             | .57                |
| NML125 | 2.40       | 2.40             | .57                |
| NML150 | 2.60       | 2.75             | .57                |
| NML200 | 3.30       | 3.10             | .67                |

# AMERICAN FITTINGS Corporation



Made in the USA Since 1946

LIQUID TIGHT CONNECTORS  
Flexible Metal MS Connectors  
Canon Type Plug Adaptor  
Size Range: 3/8" to 3/4"

## Liquid Tight Flexible Metal MS Connectors (Canon Type Plug Adaptor)

- UL rated Liquid Tight conduit to female thread
- For industrial applications where liquid tight conduit needs to be connected to female multi pin plug (Canon type)
- Made from corrosion resistant machined steel, zinc plated




E93605



LR61799

## SPEC-grade

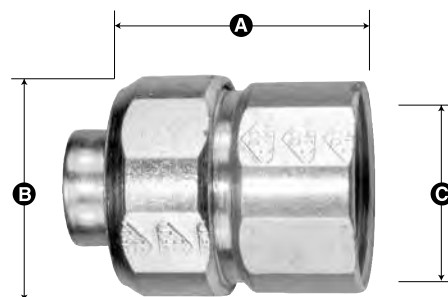

Featuring:  
EZ-Torque Compression Nut

### Dimensional Table

| Cat. #     | A    | B    | C   |
|------------|------|------|-----|
| STR38807MS | 1.32 | 1.06 | .50 |
| STR3814MS  | 1.32 | 1.06 | .50 |
| STR3818MS  | 1.32 | 1.06 | .50 |
| STR5018MS  | 1.32 | 1.13 | .53 |
| STR5020MS  | 1.38 | 1.13 | .66 |
| STR7520MS  | 1.38 | 1.43 | .67 |

| Cat. #     | Size | AN-MS Conn<br>Shell Size | Thread Size        | Unit<br>Ctn | Std<br>Pkg | WT/<br>100 |
|------------|------|--------------------------|--------------------|-------------|------------|------------|
| STR38807MS | 3/8" |                          | 20.5mm x 1.25mm    | 25          | 125        | 10         |
| STR3814MS  | 3/8" | 14, 14S                  | 3/4"-20 UNEF 2B    | 25          | 125        | 10         |
| STR3818MS  | 3/8" | 18                       | 1"-20 UNEF 2B      | 25          | 125        | 10         |
| STR5018MS  | 1/2" | 18                       | 1"-20 UNEF 2B      | 25          | 125        | 14         |
| STR5020MS  | 1/2" | 20, 22                   | 1-3/16"-18 UNEF 2B | 20          | 100        | 16         |
| STR7520MS  | 3/4" | 20, 22                   | 1-3/16"-18 UNEF 2B | 20          | 100        | 18         |

\* Also available with stainless steel mesh

### Raintight

| Cat. #       | Size | AN-MS Conn<br>Shell Size | Thread Size        | Unit<br>Ctn | Std<br>Pkg | WT/<br>100 |
|--------------|------|--------------------------|--------------------|-------------|------------|------------|
| STR38807MSRT | 3/8" |                          | 20.5mm x 1.25mm    | 25          | 125        | 10         |
| STR3814MSRT  | 3/8" | 14, 14S                  | 3/4"-20 UNEF 2B    | 25          | 125        | 10         |
| STR3818MSRT  | 3/8" | 18                       | 1"-20 UNEF 2B      | 25          | 125        | 10         |
| STR5018MSRT  | 1/2" | 18                       | 1"-20 UNEF 2B      | 25          | 125        | 14         |
| STR5020MSRT  | 1/2" | 20, 22                   | 1-3/16"-18 UNEF 2B | 20          | 100        | 16         |
| STR7520MSRT  | 3/4" | 20, 22                   | 1-3/16"-18 UNEF 2B | 20          | 100        | 18         |





## Liquid Tight Connectors with Female Threaded Hubs and Chase Nipples

- For connecting liquid tight conduit into electrical box - inside low profile
- Provides versatility in threaded hub or panelboard applications
- Includes a sealing washer



### Liquid Tight Female Hub

| Cat. #     | Size   | Unit Ctn | Std Pkg | WT/ 100 |
|------------|--------|----------|---------|---------|
| STR38FRCN  | 3/8"   | 25       | 125     | 16      |
| STR50FRCN  | 1/2"   | 25       | 125     | 17      |
| STR75FRCN  | 3/4"   | 25       | 125     | 25      |
| STR100FRCN | 1"     | 5        | 25      | 40      |
| STR125FRCN | 1 1/4" | 5        | 25      | 73      |
| STR150FRCN | 1 1/2" | 5        | 25      | 90      |
| STR200FRCN | 2"     | 5        | 25      | 117     |

### Dimensional Table

| Cat. #     | A    | B    | C   | D        |
|------------|------|------|-----|----------|
| STR38FRCN  | 1.09 | 1.14 | .16 | 1"       |
| STR50FRCN  | 1.19 | 1.21 | .16 | 1"       |
| STR75FRCN  | 1.43 | 1.24 | .16 | 1 1/4"   |
| STR100FRCN | 1.75 | 1.57 | .19 | 1 5/8"   |
| STR125FRCN | 2.16 | 1.86 | .20 | 1 7/8"   |
| STR150FRCN | 2.38 | 1.97 | .25 | 2 3/16"  |
| STR200FRCN | 2.88 | 2.07 | .25 | 2 11/16" |

## SPEC-grade




Featuring:  
EZ-Torque Compression Nut



## Sealing Washers

- Polyethylene
- Moisture resistant

## SPEC-grade

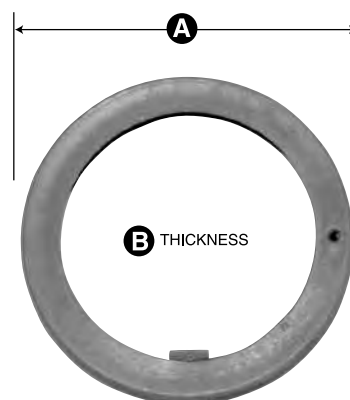

| Cat. # | Size   | Std Pkg | WT/ 100 |
|--------|--------|---------|---------|
| SW50   | 1/2"   | 500     | .5      |
| SW75   | 3/4"   | 500     | .5      |
| SW100  | 1"     | 250     | 1       |
| SW125  | 1-1/4" | 250     | 1       |
| SW150  | 1-1/2" | 250     | 1       |
| SW200  | 2"     | 250     | 2       |
| SW250  | 2-1/2" | 100     | 2       |
| SW300  | 3"     | 100     | 2       |
| SW350  | 3-1/2" | 50      | 2       |
| SW400  | 4"     | 50      | 2       |

## Dimensional Table

| Cat. # | A Diameter | B Thickness |
|--------|------------|-------------|
| SW50   | 1.10       | .075        |
| SW75   | 1.34       | .080        |
| SW100  | 1.60       | .080        |
| SW125  | 1.93       | .080        |
| SW150  | 2.20       | .080        |
| SW200  | 2.57       | .080        |
| SW250  | 2.88       | .125        |
| SW300  | 3.52       | .125        |
| SW350  | 4.03       | .125        |
| SW400  | 4.52       | .125        |



## Liquid Tight Ferrules Replacements

- Reusable
- Steel, zinc plated
- For improved sealing and grounding

**SPEC-grade**




## Replacement Ferrules

| Cat. #  | Size   | Unit Ctn | Std Pkg | WT/ 100 |
|---------|--------|----------|---------|---------|
| STR38F  | 3/8"   | 100      | 500     | 2       |
| STR50F  | 1/2"   | 100      | 500     | 2       |
| STR75F  | 3/4"   | 100      | 500     | 3       |
| STR100F | 1"     | 50       | 250     | 3       |
| STR125F | 1-1/4" | 25       | 125     | 5       |
| STR150F | 1-1/2" | 10       | 50      | 6       |
| STR200F | 2"     | 5        | 25      | 11      |
| STR250F | 2-1/2" | -        | 1       | 23      |
| STR300F | 3"     | -        | 1       | 16      |
| STR350F | 3-1/2" | -        | 1       | 50      |
| STR400F | 4"     | -        | 1       | 38      |



## Solderless Lugs - Copper and Aluminum

- Lay-in connectors
- High strength, high conductive

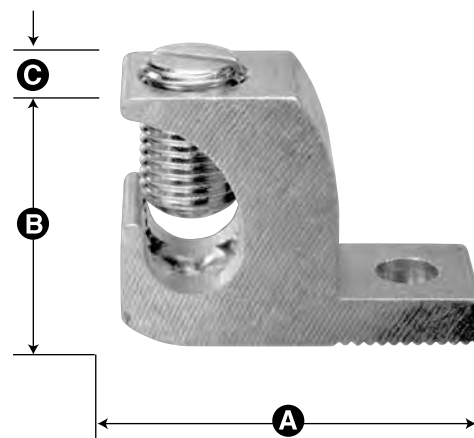

### Aluminum Alloy 6061

| Cat. # | Wire Range<br>CU-AL | Unit<br>Ctn | Std<br>Pkg | WT/<br>100 |
|--------|---------------------|-------------|------------|------------|
| GLA4   | 4-14                | 50          | 500        | 2          |
| GLA0   | 1/0-8               | 25          | 250        | 7          |
| GLA250 | 250 mcm-6           | 10          | 100        | 19         |

### Dimensional Table

| Cat. # | A    | B    | C   |
|--------|------|------|-----|
| GLA4   | 1.07 | .75  | .38 |
| GLA0   | 1.50 | 1.10 | .60 |
| GLA250 | 2.20 | 1.70 | .80 |

### Copper

| Cat. # | Wire Range<br>CU-AL | Unit<br>Ctn | Std<br>Pkg | WT/<br>100 |
|--------|---------------------|-------------|------------|------------|
| GLCU4  | 4-14                | 50          | 500        | 6          |
| GLCU2  | 2-8                 | 50          | 500        | 5          |

### Dimensional Table

| Cat. # | A    | B   | C   |
|--------|------|-----|-----|
| GLCU4  | 1.30 | .88 | .40 |
| GLCU2  | 1.47 | .92 | .48 |