



SLOPE CEILING TC REMODEL HOUSING

STANDARD SLOPE:

7/12 TO 12/12 PITCH (30° TO 45°)

INCANDESCENT LAMPS

TC928R

Project: _____

Fixture Type: _____

Location: _____

Contact/Phone: _____

PRODUCT DESCRIPTION

Slope ceiling TC Remodel Housing for remodel application where back side of ceiling is not accessible • Installs through an opening in ceiling from below • Secures in place with factory supplied remodel clips • Designed for use in non-insulated areas • If installed where insulation is present, the insulation must be pulled back 3" from TC housing.

PRODUCT SPECIFICATIONS

Lamp Lamp ratings based on trim selected – see reverse.

Socket Medium base porcelain with nickel-plated copper screw shell • Adjustable to position lamp perpendicular to floor.

Trims Trim selection shown on reverse.

Labels U.L. listed for through-branch wiring, damp locations and IP • Product thermally protected against improper use of lamps or insulation • Union made • UL Listed/CSA certified • Trim No. 603 is wet location approved for covered ceiling applications.

Testing All reports are based on published industry procedures; field performance may differ from laboratory performance.



Specifications subject to change without notice.

INSTALLATION

Junction Box Pre-wired junction box, UL listed/CSA certified for through-branch wiring maximum 4 No. 12 AWG 90° C branch circuit conductors (2 in, 2 out) • Junction box provided with removable access plate, (4) ½" knockouts, (4) Non-metallic sheathed cable connectors and ground wire • Knockouts equipped with pryout slots.

Housing TC housing, 22-gauge white painted steel with aluminum cap • Housing is vertically adjustable to accommodate up to a 1" ceiling thickness • Designed to fit 2x8 or 2x10 construction.

DIMENSIONS

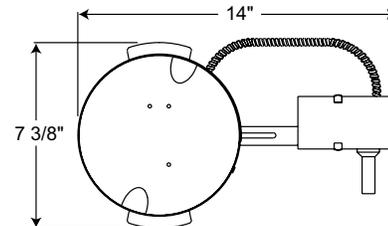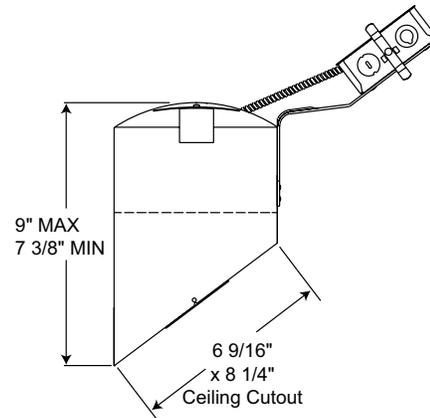

PRODUCT CODES

Catalog Number	Input Voltage	Lamp Rating
TC928R	120V	PAR16/PAR38

Housing and trim can be ordered together or separate, but will always ship separately.

SLOPE CEILING TC REMODEL HOUSING

STANDARD SLOPE:

7/12 TO 12/12 PITCH (30° TO 45°)

INCANDESCENT LAMPS

TC928R

ROUND TRIMS

	Cat. No.	Description	Lamp Rating
	602 BWH	6" Super Slope Downlight Cone Trim - Black Cone, White Trim Ring	75W PAR30, 150W PAR38, 85W BR30
	602 CWH	6" Super Slope Downlight Cone Trim - Clear Alzak® Cone, White Trim Ring	
	602 GWH	6" Super Slope Downlight Cone Trim - Gold Cone, White Trim Ring	
	602 HZSC	6" Super Slope Downlight Cone Trim - Haze Cone, Satin Chrome Trim	
	602 HZWH	6" Super Slope Downlight Cone Trim - Haze Cone, White Trim Ring	
	602 WHZBRZ	6" Super Slope Downlight Cone Trim - Wheat Haze Cone, Bronze Trim Ring	
	602 WHZWH	6" Super Slope Downlight Cone Trim - Wheat Haze Cone, White Trim Ring	
	603 BWH ◆	6" Lensed Flat Diffuser Trim - Black Baffle, White Trim Ring	75W A19, 75W PAR30
	603 WWH ◆	6" Lensed Flat Diffuser Trim - White Baffle, White Trim Ring	
	604 BBRZ	6" Downlight Baffle Trim - Black Baffle, Bronze Trim Ring	150W PAR38
	604 BBL	6" Downlight Baffle Trim - Black Baffle, Black Trim Ring	
	604 BSC	6" Downlight Baffle Trim - Black Baffle, Satin Chrome Trim Ring	
	604 BWH	6" Downlight Baffle Trim - Black Baffle, White Trim Ring	
	604 WWH	6" Downlight Baffle Trim - White Baffle, White Trim Ring	
	606 BWH	6" Adjustable Cylinder Spotlight in Baffle Trim - Black Baffle, White Trim Ring	60W PAR16
	606 WWH	6" Adjustable Cylinder Spotlight in Baffle Trim - White Baffle, White Trim Ring	

Trim Size: Cat. No. 604 - 9 3/16" x 8 3/16" O.D., Cat. No. 606 - 9 1/8" O.D.

◆ UL Listed for use in wet location.



SLOPE CEILING TC REMODEL HOUSING

STANDARD SLOPE:

7/12 TO 12/12 PITCH (30° TO 45°)

INCANDESCENT LAMPS

TC928R

Project: _____

Fixture Type: _____

Location: _____

Contact/Phone: _____

PRODUCT DESCRIPTION

Slope ceiling TC Remodel Housing for remodel application where back side of ceiling is not accessible • Installs through an opening in ceiling from below • Secures in place with factory supplied remodel clips • Designed for use in non-insulated areas • If installed where insulation is present, the insulation must be pulled back 3" from TC housing.

PRODUCT SPECIFICATIONS

Lamp Lamp ratings based on trim selected – see reverse.

Socket Medium base porcelain with nickel-plated copper screw shell • Adjustable to position lamp perpendicular to floor.

Trims Trim selection shown on reverse.

Labels U.L. listed for through-branch wiring, damp locations and IP • Product thermally protected against improper use of lamps or insulation • Union made • UL Listed/CSA certified • Trim No. 603 is wet location approved for covered ceiling applications.

Testing All reports are based on published industry procedures; field performance may differ from laboratory performance.



Specifications subject to change without notice.

INSTALLATION

Junction Box Pre-wired junction box, UL listed/CSA certified for through-branch wiring maximum 4 No. 12 AWG 90° C branch circuit conductors (2 in, 2 out) • Junction box provided with removable access plate, (4) ½" knockouts, (4) Non-metallic sheathed cable connectors and ground wire • Knockouts equipped with pryout slots.

Housing TC housing, 22-gauge white painted steel with aluminum cap • Housing is vertically adjustable to accommodate up to a 1" ceiling thickness • Designed to fit 2x8 or 2x10 construction.

DIMENSIONS

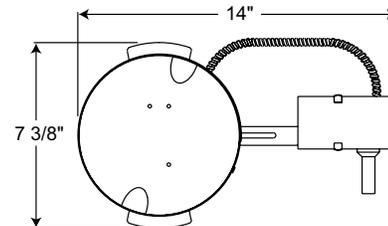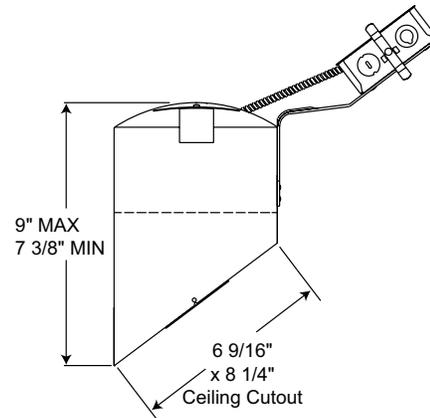

PRODUCT CODES

Catalog Number	Input Voltage	Lamp Rating
TC928R	120V	PAR16/PAR38

Housing and trim can be ordered together or separate, but will always ship separately.

SLOPE CEILING TC REMODEL HOUSING

STANDARD SLOPE:

7/12 TO 12/12 PITCH (30° TO 45°)

INCANDESCENT LAMPS

TC928R

ROUND TRIMS

	Cat. No.	Description	Lamp Rating
	602 BWH	6" Super Slope Downlight Cone Trim - Black Cone, White Trim Ring	75W PAR30, 150W PAR38, 85W BR30
	602 CWH	6" Super Slope Downlight Cone Trim - Clear Alzak® Cone, White Trim Ring	
	602 GWH	6" Super Slope Downlight Cone Trim - Gold Cone, White Trim Ring	
	602 HZSC	6" Super Slope Downlight Cone Trim - Haze Cone, Satin Chrome Trim	
	602 HZWH	6" Super Slope Downlight Cone Trim - Haze Cone, White Trim Ring	
	602 WHZBRZ	6" Super Slope Downlight Cone Trim - Wheat Haze Cone, Bronze Trim Ring	
	602 WHZWH	6" Super Slope Downlight Cone Trim - Wheat Haze Cone, White Trim Ring	
	603 BWH ◆	6" Lensed Flat Diffuser Trim - Black Baffle, White Trim Ring	75W A19, 75W PAR30
	603 WWH ◆	6" Lensed Flat Diffuser Trim - White Baffle, White Trim Ring	
	604 BBRZ	6" Downlight Baffle Trim - Black Baffle, Bronze Trim Ring	150W PAR38
	604 BBL	6" Downlight Baffle Trim - Black Baffle, Black Trim Ring	
	604 BSC	6" Downlight Baffle Trim - Black Baffle, Satin Chrome Trim Ring	
	604 BWH	6" Downlight Baffle Trim - Black Baffle, White Trim Ring	
	604 WWH	6" Downlight Baffle Trim - White Baffle, White Trim Ring	
	606 BWH	6" Adjustable Cylinder Spotlight in Baffle Trim - Black Baffle, White Trim Ring	60W PAR16
	606 WWH	6" Adjustable Cylinder Spotlight in Baffle Trim - White Baffle, White Trim Ring	

Trim Size: Cat. No. 604 - 9 3/16" x 8 3/16" O.D., Cat. No. 606 - 9 1/8" O.D.

◆ UL Listed for use in wet location.