PASS & SEYMOUR®

Hospital Grade Devices
Construction Grade Receptacles
Tamper-Resistant 15 & 20A, 125V

TR8200H **TR8300H**

Easy installation plus safety for pediatric locations.

TR8200H, TR8300H

Compact bodies leave more room for wires in the box, but that isn't the only way these durable Pass & Seymour® Hospital Grade Receptacles speed installation. They also feature an auto-ground and screw-pressure-plate back wiring (with the option of side wiring). Long service life is ensured by one piece, triple-wipe brass power contacts and a heavy-gauge strap that is locked into the high strength thermoplastic back body. A sturdy mechanical shutter system helps prevent children from inserting objects into the receptacle.

Features & Benefits

.032 inch thick, brass, triple-wipe power contacts for lasting retention.

Easily accessed break-off, line-contact connecting tab for fast, easy split-circuit wiring.

Two drive screws anchor strap to back body and face where abrupt removal torque is strongest.

Tri-drive steel terminal screws. Internal screw-pressure-plate back and side wire capability. Two back wire holes for more wiring flexibility.

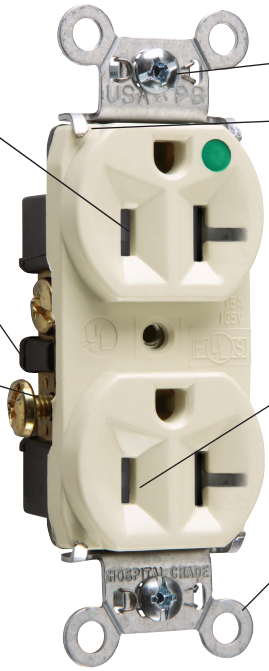

Auto-ground clip assures positive ground.

Strap tabs wrap around face to prevent strap from separating from face and back body.

Dual mechanical shutter system o help prevent insertion of foreign objects.

Zinc-plated steel strap for added strength and ground conductivity.

TR8300HLA

Compliance

UL Listed, File Number E140596, Standard UL498.
Fed Spec WC596, Hospital Grade
CSA Certified, File Number LR16063, Standard CSA-C22.2 No. 42

Technical Information

Performance	
Electrical	
Dielectric Withstand Voltage	Withstands 2000V minimum
Maximum Working Voltage	250V
Current Interrupting	Certified for current interrupting at full-rated current
Temperature Rise	Maximum 30°C temperature rise at full-rated current after 50 cycles of overload at 150% of rated current with direct current
Mechanical	
Terminal Identification	Terminal Identification in accordance with UL 498 (Brass, White, Green)
Terminal Accommodation	#14 AWG - #10 AWG copper conductor only.
Product Identification	Ratings are a permanent part of the device
Environmental	
Flammability	UL94 V2
Operating Temperature	Maximum continuous +60°C, minimum -40°C (without impact)
Materials	
Face	Nylon
Back Body	PVC
Line Contacts	.032 688 Brass
Mounting Strap	.042" Zinc-Plated Steel
Ground Contacts	.040" 688 Brass
Pressure Plate	.080" Steel
Terminal Screws	#8 Tri-Drive Brass (Neutral = Nickel Plated Steel)
Ground Screw	#8 Hex Tri-Drive Brass
Assembly Drive Screw	Zinc-Plated Steel
Auto-Ground Clip	Stainless Steel
Mounting Screws	Tri-Drive Steel

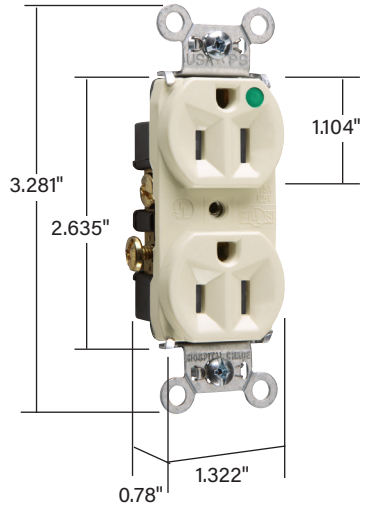

Dimensions for 15 & 20 Amp
TR8200HLA

Warranty
1 Year

Ordering Information – Hospital Grade Tamper-Resistant Duplex Receptacles Back & Side Wire

Catalog Number	Rating A.	Rating V.	Color	NEMA Config. No.
TR8200HI	15	125	Ivory	5-15R
TR8200HW	15	125	White	5-15R
TR8200H	15	125	Brown	5-15R
TR8200HGRY	15	125	Gray	5-15R
TR8200HBK	15	125	Black	5-15R
TR8200HRED	15	125	Red	5-15R
TR8200HLA	15	125	Light Almond	5-15R
TR8300HI	20	125	Ivory	5-20R
TR8300HW	20	125	White	5-20R
TR8300H	20	125	Brown	5-20R
TR8300HGRY	20	125	Gray	5-20R
TR8300HBK	20	125	Black	5-20R
TR8300HRED	20	125	Red	5-20R
TR8300HLA	20	125	Light Almond	5-20R

NEMA 5-15R

NEMA 5-20R

Vertical Markets

- **Health Care**
- **Institutional**
- **Education**

All brand and product names referenced in this document are registered trademarks or trademarks of their respective holders.

Legrand, North America
60 Woodlawn Street
West Hartford, CT 06110
877-295-3472
www.legrand.us

Canada
844-977-3783
www.legrand.ca

FOLLOW US

© Copyright 2025 Legrand All Rights Reserved

PASS & SEYMOUR®

Hospital Grade Devices
Construction Grade Receptacles
Tamper-Resistant 15 & 20A, 125V

TR8200H **TR8300H**

Easy installation plus safety for pediatric locations.

TR8200H, TR8300H

Compact bodies leave more room for wires in the box, but that isn't the only way these durable Pass & Seymour® Hospital Grade Receptacles speed installation. They also feature an auto-ground and screw-pressure-plate back wiring (with the option of side wiring). Long service life is ensured by one piece, triple-wipe brass power contacts and a heavy-gauge strap that is locked into the high strength thermoplastic back body. A sturdy mechanical shutter system helps prevent children from inserting objects into the receptacle.

Features & Benefits

.032 inch thick, brass, triple-wipe power contacts for lasting retention.

Easily accessed break-off, line-contact connecting tab for fast, easy split-circuit wiring.

Two drive screws anchor strap to back body and face where abrupt removal torque is strongest.

Tri-drive steel terminal screws. Internal screw-pressure-plate back and side wire capability. Two back wire holes for more wiring flexibility.

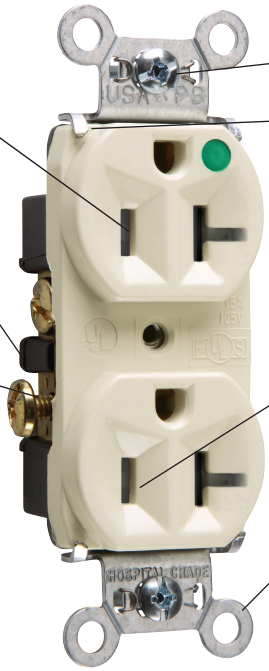

Auto-ground clip assures positive ground.

Strap tabs wrap around face to prevent strap from separating from face and back body.

Dual mechanical shutter system o help prevent insertion of foreign objects.

Zinc-plated steel strap for added strength and ground conductivity.

TR8300HLA

Compliance

UL Listed, File Number E140596, Standard UL498.
Fed Spec WC596, Hospital Grade
CSA Certified, File Number LR16063, Standard CSA-C22.2 No. 42

Technical Information

Performance	
Electrical	
Dielectric Withstand Voltage	Withstands 2000V minimum
Maximum Working Voltage	250V
Current Interrupting	Certified for current interrupting at full-rated current
Temperature Rise	Maximum 30°C temperature rise at full-rated current after 50 cycles of overload at 150% of rated current with direct current
Mechanical	
Terminal Identification	Terminal Identification in accordance with UL 498 (Brass, White, Green)
Terminal Accommodation	#14 AWG - #10 AWG copper conductor only.
Product Identification	Ratings are a permanent part of the device
Environmental	
Flammability	UL94 V2
Operating Temperature	Maximum continuous +60°C, minimum -40°C (without impact)
Materials	
Face	Nylon
Back Body	PVC
Line Contacts	.032 688 Brass
Mounting Strap	.042" Zinc-Plated Steel
Ground Contacts	.040" 688 Brass
Pressure Plate	.080" Steel
Terminal Screws	#8 Tri-Drive Brass (Neutral = Nickel Plated Steel)
Ground Screw	#8 Hex Tri-Drive Brass
Assembly Drive Screw	Zinc-Plated Steel
Auto-Ground Clip	Stainless Steel
Mounting Screws	Tri-Drive Steel

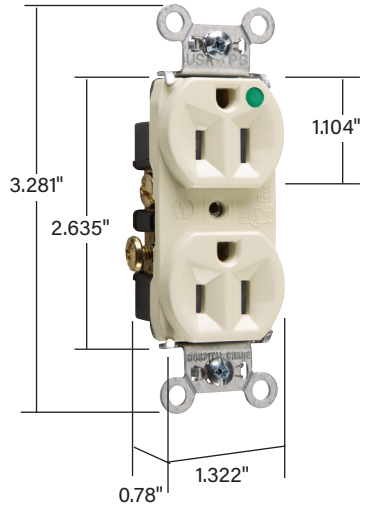

Dimensions for 15 & 20 Amp
TR8200HLA

Warranty
1 Year

Ordering Information – Hospital Grade Tamper-Resistant Duplex Receptacles Back & Side Wire

Catalog Number	Rating A.	Rating V.	Color	NEMA Config. No.
TR8200HI	15	125	Ivory	5-15R
TR8200HW	15	125	White	5-15R
TR8200H	15	125	Brown	5-15R
TR8200HGRY	15	125	Gray	5-15R
TR8200HBK	15	125	Black	5-15R
TR8200HRED	15	125	Red	5-15R
TR8200HLA	15	125	Light Almond	5-15R
TR8300HI	20	125	Ivory	5-20R
TR8300HW	20	125	White	5-20R
TR8300H	20	125	Brown	5-20R
TR8300HGRY	20	125	Gray	5-20R
TR8300HBK	20	125	Black	5-20R
TR8300HRED	20	125	Red	5-20R
TR8300HLA	20	125	Light Almond	5-20R

NEMA 5-15R

NEMA 5-20R

Vertical Markets

- **Health Care**
- **Institutional**
- **Education**

All brand and product names referenced in this document are registered trademarks or trademarks of their respective holders.

Legrand, North America
60 Woodlawn Street
West Hartford, CT 06110
877-295-3472
www.legrand.us

Canada
844-977-3783
www.legrand.ca

FOLLOW US

© Copyright 2025 Legrand All Rights Reserved