

## U5101-XL-11GR





U5101-XL-11GR
4 Terminal Ringless Small Closing Plate 520GR 520GR Surface Mount
784572275812
5.188
8.875
25
Milbank
Ringless Meter Socket
Two Single Pole 20 Ampere Breakers
RV Power
UL Listed;Type 3R
Up to 240 Volts Alternating Current
125 Continuous Ampere
1 Phase
60 Hertz
5.188L x 8.875W x 25H
2
Two Single Pole 20 Ampere
Breakers


Insulation	Glass Polyester
Mounting	Surface Mount
Enclosure	G90 Galvanized Steel with Powder Coat Finish
Jaw Quantity	4 Terminal
Bypass Type	No Bypass
Number of Meter Positions	Single Power Head
Equipment Ground	Ground Bar
Hub Opening	Small Closing Plate
Line Side Wire Range	6 AWG - 350 kcmil
Number Branch Circuits	4
Number Of Receptacles	2
Receptacle Configuration	Two NEMA 5-20 Ground Fault


Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

FEATURE TABLE		
ITEM	QTY	DESCRIPTION
Α	3	U/L MNTG.EMBOSS
В	3	1/4 SOLID K.O.
С	1	1¼ SOLID K.O.
D	2	½, ¾, 1, 1¼ CONC. K.O.
E	2	½, ¾, 1, 1¼, 1½ CONC. K.O.
F	1	34, 1, 114, 11/2, 2 CONC. K.O.

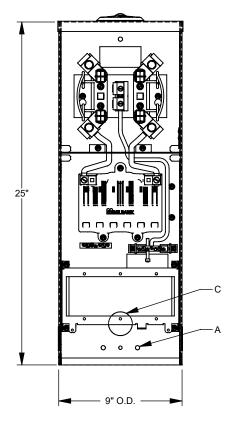

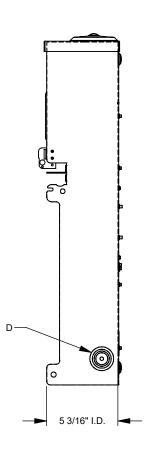



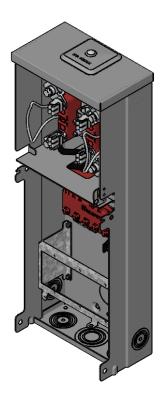



## All dimensions are +/- 1/16". Drawing views are not to scale.

Version:

1

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.