



MILBANK
ENERGY AT WORK





UAP6095-O-NES



Catalog Number	UAP6095-O-NES	Hinge Type	Lift Off Hinges
Marketing Product Description	Aluminum Painted Shell 22 Position Per Phase Bar 500 Kcmil Penta Bolt	Top	Plain Top
UPC	784572703926	Door	Hinged Cover
Length (IN)	16	Latch	Padlocking Handle with 3 Point Latch Assembly
Width (IN)	32.375	Support	Body Stiffeners
Height (IN)	43		
Weight (LB)	138		
Brand Name	Milbank		
Type	Terminal Box		
Special Features	4000 Ampere; Three Phase Four Wire; Penta Bolt; 10,000 Short Circuit Current Rating		
Application	Terminate Conductors		
Standard	UL Listed		
Number Of Outlet	0		
Material	Aluminum		
Size	16L x 32.375W x 43H		
Color	ANSI 61 Gray		
Construction	Welded		
Cable Entry	No Knockouts		
Mounting	Pad Mount or Wall Mount		
NEMA Rating	Type 3R		

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

FEATURE TABLE		
ITEM	QTY	DESCRIPTION
A	4	TRANS. MNTG.EMBOSS, NO HOLE

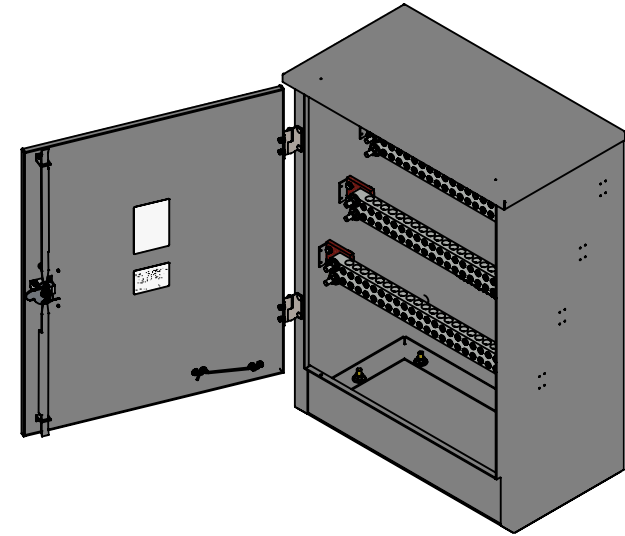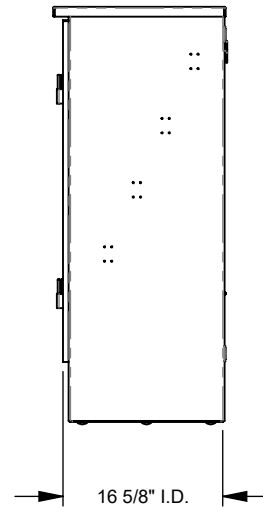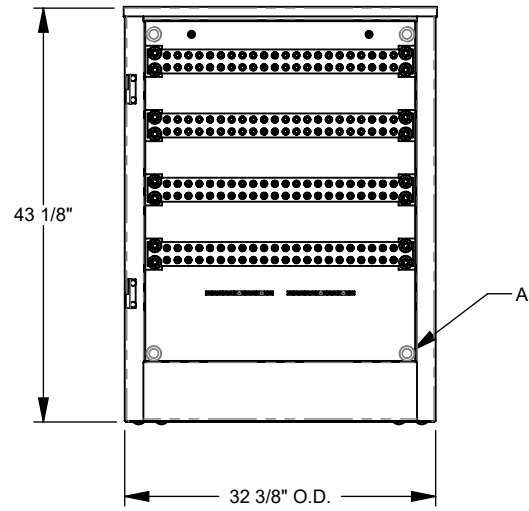

Version:

1

**All dimensions are +/- 1/16".
Drawing views are not to scale.**

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.