

VuLite®

## 6" TC REMODEL HOUSING

INCANDESCENT LAMPS

V6TCR W

Project: \_\_\_\_\_

Fixture Type: \_\_\_\_\_

Location: \_\_\_\_\_

Contact/Phone: \_\_\_\_\_

**PRODUCT DESCRIPTION**

TC Remodel Housing designed for use in non-insulated areas • If installed where insulation is present, the insulation must be pulled back 3" from all sides of the TC housing • In Canada, when insulation is present, type IC fixture must be used • TC Remodel Housing for remodel application where back side of ceiling is not accessible • Installs through an opening in the ceiling from below • Secured in place by factory installed remodel springs.

**PRODUCT SPECIFICATIONS**

**Lamp** Lamp ratings based on trim selected—see reverse.

**Socket** Medium base porcelain socket with nickel-plated copper screw shell

- Adjustable socket bracket and detachable socket with snap-in springs to accommodate various lamp and trim combinations • Shipped with socket cap to protect against paint overspray.

**Trims** Trim selection shown on reverse.

**Labels** UL/cUL listed for through-branch wiring, damp locations and IP

- Product thermally protected against improper use of lamps or insulation
- UL/cUL Listed • Trim V3020, V3040N and V3041 are wet location approved for covered ceiling applications • Trim V3034 is wet location approved for covered ceiling applications, **when used with outdoor rated lamps**.

**Testing** All reports are based on published industry procedures; field performance may differ from laboratory performance.

**INSTALLATION**

**Junction Box** Pre-wired junction box, UL/cUL listed • Junction box provided with removable access plate, (5)  $\frac{1}{2}$ " knockouts, (4) Non-metallic sheathed cable connectors and ground wire • Knockouts equipped with pryout slots

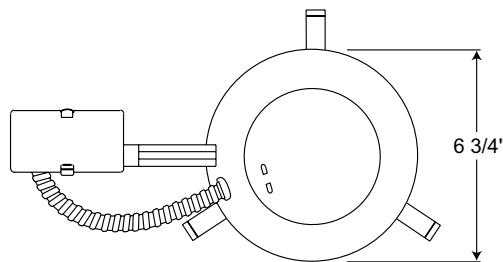
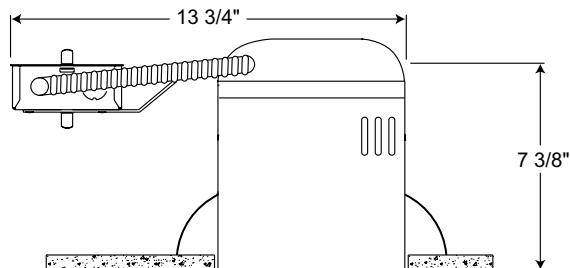
- Push-in electrical connectors included.

**Housing** TC housing, .028" aluminum • Remodel springs accommodate up to 1" ceiling thickness.

**Warranty** 1-year limited warranty. This is the only warranty provided and no other statements in this specification sheet create any warranty of any kind. All other express and implied warranties are disclaimed. Complete warranty terms located at: [www.acuitybrands.com/support/warranty/terms-and-conditions](http://www.acuitybrands.com/support/warranty/terms-and-conditions)

**Note:** Actual performance may differ as a result of end-user environment and application.

Specifications subject to change without notice.

**DIMENSIONS**

6 1/4" CEILING CUTOUT

**PRODUCT CODES**

Catalog No.	Input Voltage	Lamp Rating (max.)
<b>V6TCR W</b>	120V	A19/PAR30/PAR30L/BR30/BR40/PAR38 (See reverse for max. trim rating)

# 6" TC REMODEL HOUSING

## INCANDESCENT LAMPS

### V6TCR W

#### TRIMS/LAMPS

Cat. No.	Description	Max. Lamp Rating
 <b>V3024 WWH</b>	Conical White Baffle	75W PAR30, 75W PAR30L, 65W BR30
 <b>V3024 BWH</b>	Conical Black Baffle	120W BR40
 <b>V3025 WWH</b>	Straight White Baffle	75W PAR30, 75W PAR30L, 65W BR30
 <b>V3025 BWH</b>	Straight Black Baffle	120W BR40, 120W PAR38
 <b>V3034 WWH◆◆</b>	Full White Baffle	60W A19 (white only), 75W PAR30, 75W PAR30L,
 <b>V3034T WWH◆◆</b>	Full White Baffle with Torsion Springs	75W PAR38 (black max.)
 <b>V3034T BWH◆◆</b>	Full Black Baffle with Torsion Springs	
 <b>V3027 CWH</b>	Clear Cone	75W PAR30, 75W PAR30L, 65W BR30 90W BR40
 <b>V3037T WWH◆◆</b>	Full White Cone with Torsion Springs	85W BR30, 120W BR40, 150W PAR38
 <b>V3029 WH</b>	White Eyeball	75W PAR30, 75W PAR30L, 65W BR30
 <b>V3020 PW◆</b>	Stippled Opal Lens Shower	40W A19, 75W PAR30, 75W PAR30L 65W BR30, 75W PAR38
 <b>V3040N PW◆</b>	Stippled Opal Lens Shower with Reflector	75W A19
 <b>V3041 PW◆</b>	Drop Opal Lens Shower with Reflector	100W A19
 <b>V3050 WH</b>	Open Frame	65W BR30

Trim Size: 7 $\frac{3}{4}$ " O.D. (except Cat. Nos. V3034 - 7 $\frac{5}{8}$ " O.D., Cat. Nos. V3020, V3040N, V3041, V3050 - 8" O.D.).

Trim Finish: PW - Plastic White (Polycarbonate material shower trim), WH - White.

Note: In Canada when insulation is present, Type IC fixtures must be used.

◆ UL/cUL Listed for use in wet location.

◆◆ UL/cUL Listed for use in wet location with outdoor rated lamp.

VuLite®

## 6" TC REMODEL HOUSING

INCANDESCENT LAMPS

V6TCR W

Project: \_\_\_\_\_

Fixture Type: \_\_\_\_\_

Location: \_\_\_\_\_

Contact/Phone: \_\_\_\_\_

**PRODUCT DESCRIPTION**

TC Remodel Housing designed for use in non-insulated areas • If installed where insulation is present, the insulation must be pulled back 3" from all sides of the TC housing • In Canada, when insulation is present, type IC fixture must be used • TC Remodel Housing for remodel application where back side of ceiling is not accessible • Installs through an opening in the ceiling from below • Secured in place by factory installed remodel springs.

**PRODUCT SPECIFICATIONS**

**Lamp** Lamp ratings based on trim selected—see reverse.

**Socket** Medium base porcelain socket with nickel-plated copper screw shell

- Adjustable socket bracket and detachable socket with snap-in springs to accommodate various lamp and trim combinations • Shipped with socket cap to protect against paint overspray.

**Trims** Trim selection shown on reverse.

**Labels** UL/cUL listed for through-branch wiring, damp locations and IP

- Product thermally protected against improper use of lamps or insulation
- UL/cUL Listed • Trim V3020, V3040N and V3041 are wet location approved for covered ceiling applications • Trim V3034 is wet location approved for covered ceiling applications, **when used with outdoor rated lamps**.

**Testing** All reports are based on published industry procedures; field performance may differ from laboratory performance.

**INSTALLATION**

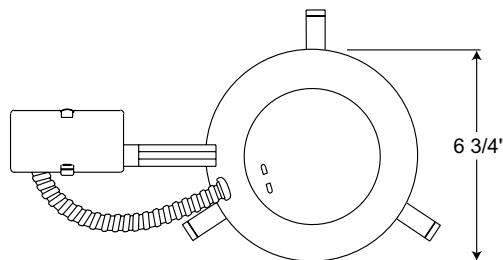
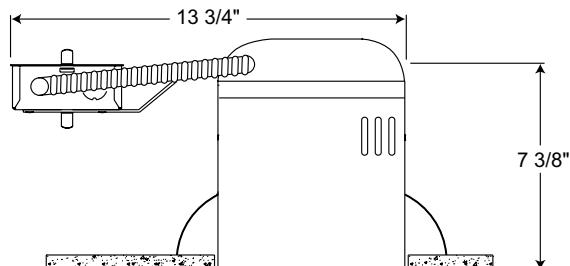
**Junction Box** Pre-wired junction box, UL/cUL listed • Junction box provided with removable access plate, (5)  $\frac{1}{2}$ " knockouts, (4) Non-metallic sheathed cable connectors and ground wire • Knockouts equipped with pryout slots • Push-in electrical connectors included.

**Housing** TC housing, .028" aluminum • Remodel springs accommodate up to 1" ceiling thickness.

**Warranty** 1-year limited warranty. This is the only warranty provided and no other statements in this specification sheet create any warranty of any kind. All other express and implied warranties are disclaimed. Complete warranty terms located at: [www.acuitybrands.com/support/warranty/terms-and-conditions](http://www.acuitybrands.com/support/warranty/terms-and-conditions)

**Note:** Actual performance may differ as a result of end-user environment and application.

Specifications subject to change without notice.

**DIMENSIONS**

6 1/4" CEILING CUTOUT

**PRODUCT CODES**

Catalog No.	Input Voltage	Lamp Rating (max.)
<b>V6TCR W</b>	120V	A19/PAR30/PAR30L/BR30/BR40/PAR38 (See reverse for max. trim rating)

**6" TC REMODEL HOUSING**

INCANDESCENT LAMPS

**V6TCR W****TRIMS/LAMPS**

<b>Cat. No.</b>	<b>Description</b>	<b>Max. Lamp Rating</b>
	<b>V3024 WWH</b> Conical White Baffle	75W PAR30, 75W PAR30L, 65W BR30
	<b>V3024 BWH</b> Conical Black Baffle	120W BR40
	<b>V3025 WWH</b> Straight White Baffle	75W PAR30, 75W PAR30L, 65W BR30
	<b>V3025 BWH</b> Straight Black Baffle	120W BR40, 120W PAR38
	<b>V3034 WWH◆◆</b> Full White Baffle	60W A19 (white only), 75W PAR30, 75W PAR30L,
	<b>V3034T WWH◆◆</b> Full White Baffle with Torsion Springs	75W PAR38 (black max.)
	<b>V3034T BWH◆◆</b> Full Black Baffle with Torsion Springs	
	<b>V3027 CWH</b> Clear Cone	75W PAR30, 75W PAR30L, 65W BR30 90W BR40
	<b>V3037T WWH◆◆</b> Full White Cone with Torsion Springs	85W BR30, 120W BR40, 150W PAR38
	<b>V3029 WH</b> White Eyeball	75W PAR30, 75W PAR30L, 65W BR30
	<b>V3020 PW◆</b> Stippled Opal Lens Shower	40W A19, 75W PAR30, 75W PAR30L 65W BR30, 75W PAR38
	<b>V3040N PW◆</b> Stippled Opal Lens Shower with Reflector	75W A19
	<b>V3041 PW◆</b> Drop Opal Lens Shower with Reflector	100W A19
	<b>V3050 WH</b> Open Frame	65W BR30

Trim Size: 7<sup>3</sup>/<sub>8</sub>" O.D. (except Cat. Nos. V3034 - 7<sup>5</sup>/<sub>8</sub>" O.D., Cat. Nos. V3020, V3040N, V3041, V3050 - 8" O.D.).

Trim Finish: PW - Plastic White (Polycarbonate material shower trim), WH - White.

Note: In Canada when insulation is present, Type IC fixtures must be used.

◆ UL/cUL Listed for use in wet location.

◆◆ UL/cUL Listed for use in wet location with outdoor rated lamp.