



4" TC REMODEL HOUSING

INCANDESCENT LAMPS

TC1RC

Project: _____

Fixture Type: _____

Location: _____

Contact/Phone: _____

PRODUCT DESCRIPTION

TC Remodel Housing designed for use in non-insulated areas • Shallow housing construction allows for fit in 2 x 6 construction • Juno Type TC fixtures are designed for installations where housing and J-Box will not come into contact with insulation • Blinking light after installation indicates that improper bulb or trim is being used or that fixture has been improperly covered with insulation • In U.S., insulation must be spaced 3" away from the housing and J-Box • TC Remodel Housing for remodel application where back side of ceiling is not accessible • Installs through an opening in the ceiling from below • Secured in place by factory installed screw driven remodel clamps for easy installation into ceiling material.

PRODUCT SPECIFICATIONS

Lamp Lamp ratings based on trim selected – see reverse.

Socket Detachable medium base porcelain with nickel-plated copper screw shell.

Trims Trim selection shown on reverse.

Labels UL/cUL listed for U.S. and Canada through-branch wiring and damp locations • Product thermally protected against improper use of insulation • UL/cUL Listed • Trim No. 12, 12SQ, V4012 and V4041 are wet location approved for covered ceiling applications • Trims 14, 17, 17SQ, and V4034 are wet location approved for covered ceiling applications, **when used with outdoor rated lamps.**

Testing All reports are based on published industry procedures; field performance may differ from laboratory performance.

INSTALLATION

Junction Box Pre-wired junction box, UL/cUL listed for through-branch wiring maximum 4 No. 12 AWG 90° C branch circuit conductors (2 in, 2 out) • Junction box provided with removable access plate, (5) 1/2" knockouts, (4) Non-metallic sheathed cable connectors and ground wire • Knockouts equipped with pryout slots • Supplied with push-in electrical connectors for fast installation.

Housing TC housing, 22-gauge steel with white finish • Remodel clamps provided with #2 Quadrex drive screws (#2 Robertson/#2 Phillips combo) • Clamps accommodate up to a 5/8" ceiling thickness.

Warranty 1-year limited warranty. This is the only warranty provided and no other statements in this specification sheet create any warranty of any kind. All other express and implied warranties are disclaimed. Complete warranty terms located at: www.acuitybrands.com/support/warranty/terms-and-conditions

Note: Actual performance may differ as a result of end-user environment and application.
Specifications subject to change without notice.



PRODUCT CODES

Catalog No.	Input Voltage	Lamp Types
TC1RC W N	120V	PAR20/PAR16 Medium Base, MR16/PAR16/ES16 GU10 Base (See reverse for Trim/Lamp/Max. Wattage Ratings)

Housing and trim can be ordered together or separate, but will always ship separately.



DIMENSIONS

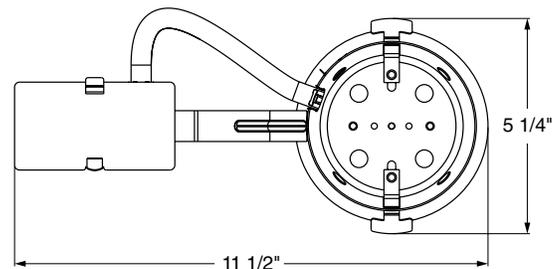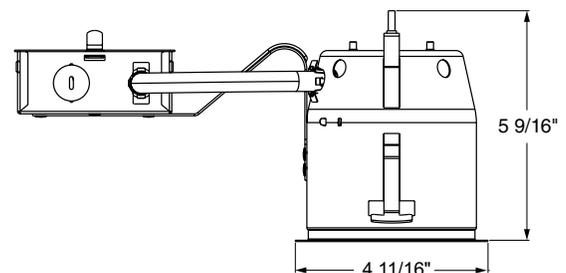

4 3/8" CEILING CUTOUT

ACCESSORIES

Catalog No.	Description
GU10WHIP	GU10 Socket Whip
SMPLT4	4" Housing Locator

To order, specify catalog number.

4" TC REMODEL HOUSING

INCANDESCENT LAMPS

TC1RC

ROUND TRIMS/ LAMPS



	Cat. No.	Description	Max. Lamp Rating
	13 WH	4" Downlight Pinhole with Integral Shield Trim - White	50W PAR20
	14 BWH ♦♦	4" Downlight Baffle Trim - Black Baffle, White Trim Ring	
	14 BSC ♦♦	4" Downlight Baffle Trim - Black Baffle, Satin Chrome Trim Ring	50W PAR20
	14 BBRZ ♦♦	4" Downlight Baffle Trim - Black Baffle, Bronze Trim Ring	
	14 BBL ♦♦	4" Downlight Baffle Trim - Black Baffle, Black Trim Ring	
	14 WWH ♦♦	4" Downlight Baffle Trim - White Baffle, White Trim Ring	
	17 CWH ♦♦	4" Downlight Cone Trim - Clear Alzak® Cone, White Trim Ring	50W PAR20
	17 BWH ♦♦	4" Downlight Cone Trim - Black Cone, White Trim Ring	
	17 PTSC ♦♦	4" Downlight Cone Trim - Pewter Cone, Satin Chrome Trim Ring	
	17 WWH ♦♦	4" Downlight Cone Trim - White Cone, White Trim Ring	
	17 HZWH ♦♦	4" Downlight Cone Trim - Haze Cone, White Trim Ring	
	17 WHZWH ♦♦	4" Downlight Cone Trim - Wheat Haze Cone, White Trim Ring	
	17 WHZBRZ ♦♦	4" Downlight Cone Trim - Wheat Haze Cone, Bronze Trim Ring	
	10 WH	4" Flush Gimbal Ringed - White	50W PAR20
	10 BL	4" Flush Gimbal Ringed - Black	
	10 SC	4" Flush Gimbal Ringed - Satin Chrome	
	10 BRZ	4" Flush Gimbal Ringed - Bronze	
	440 WH	4" Adjustable Flush Gimbal Ring Trim - White	50W MR16, PAR16, ES16 120V GU10 Base
	440 BL	4" Adjustable Flush Gimbal Ring Trim - Black	(Requires GU10WHIP)
	440 SC	4" Adjustable Flush Gimbal Ring Trim - Satin Chrome	
	440 BRZ	4" Adjustable Flush Gimbal Ring Trim - Bronze	
	445 WH	4" Adjustable Slot Aperture Trim - White	50W MR16, PAR16 ES16 120V GU10 Base, (Requires GU10WHIP)
	12 WWH ♦	4" Frosted Lens with Clear Center Trim - Perimeter Frosted Lens, Classic Aged Bronze Trim Ring	50W PAR20
	12 WSC ♦	4" Frosted Lens with Clear Center Trim - Perimeter Frosted Lens, Satin Chrome Trim Ring	
	12 WBRZ ♦	4" Frosted Lens with Clear Center Trim - Perimeter Frosted Lens, Bronze Trim Ring	
	446 WH	4" Wall Wash Adjustable Scoop Trim - White	50W MR16, PAR16 ES16 120V GU10 Base, (Requires GU10WHIP)

4" TC REMODEL HOUSING

INCANDESCENT LAMPS

TC1RC

SQUARE TRIMS/ LAMPS

	Cat. No.	Description	Max. Lamp Rating
	175Q BWH ♦♦	4" Square Downlight Trim - Black, White Trim Ring	50W PAR20
	175Q WWH ♦♦	4" Square Downlight Trim - White, White Trim Ring	
	175Q HZWH ♦♦	4" Square Downlight Trim - Haze, White Trim Ring	
	175Q WHZWH ♦♦	4" Square Downlight Trim - Wheat Haze, White Trim Ring	
	135Q WH	4" Square Pinhole Trim - White	50W PAR20
	4405Q WH	4" Square Flush Gimbal Trim - White	50W MR16
	4405Q BL	4" Square Flush Gimbal Trim - Black	120V GU10 Base (Requires GU10WHIP, 35° Vertical Adjustment)
	125Q WWH ♦	4" Square Frosted Lens with Clear Center Trim - White, White Trim Ring	50W PAR20

VULITE TRIMS/ LAMPS

	Cat. No.	Description	Max. Lamp Rating
	V4034 BWH ♦♦	4" Baffle - Black, White Trim Ring	50W PAR20
	V4034 WWH ♦♦	4" Baffle - White, White Trim Ring	
	V4010 WH	4" Gimbal Ring - White Trim Ring	50W PAR20
	V4018 WH	4" Eyeball - White Trim Ring	60W PAR16
	V4012 WH	4" Stippled Opal Lens Shower With Reflector - White Trim Ring	50W PAR20
	V4040 WH	4" Gimbal Ring - White Trim Ring	50W MR16 PAR16, ES16 120V GU10 Base (Requires GU10WHIP)
	GU10WHIP	GU10 Socket Whip	

♦ UL Listed for use in wet location.

♦♦ UL Listed for use in wet location with outdoor rated lamp.

Trim Size: 5" O.D.

Alzak is a registered trademark of Alcoa Corp.

Note: In Canada when insulation is present,
Type IC fixtures must be used.



4" TC REMODEL HOUSING

INCANDESCENT LAMPS

TC1RC

Project: _____

Fixture Type: _____

Location: _____

Contact/Phone: _____

PRODUCT DESCRIPTION

TC Remodel Housing designed for use in non-insulated areas • Shallow housing construction allows for fit in 2 x 6 construction • Juno Type TC fixtures are designed for installations where housing and J-Box will not come into contact with insulation • Blinking light after installation indicates that improper bulb or trim is being used or that fixture has been improperly covered with insulation • In U.S., insulation must be spaced 3" away from the housing and J-Box • TC Remodel Housing for remodel application where back side of ceiling is not accessible • Installs through an opening in the ceiling from below • Secured in place by factory installed screw driven remodel clamps for easy installation into ceiling material.

PRODUCT SPECIFICATIONS

Lamp Lamp ratings based on trim selected – see reverse.

Socket Detachable medium base porcelain with nickel-plated copper screw shell.

Trims Trim selection shown on reverse.

Labels UL/cUL listed for U.S. and Canada through-branch wiring and damp locations • Product thermally protected against improper use of insulation • UL/cUL Listed • Trim No. 12, 12SQ, V4012 and V4041 are wet location approved for covered ceiling applications • Trims 14, 17, 17SQ, and V4034 are wet location approved for covered ceiling applications, **when used with outdoor rated lamps.**

Testing All reports are based on published industry procedures; field performance may differ from laboratory performance.

INSTALLATION

Junction Box Pre-wired junction box, UL/cUL listed for through-branch wiring maximum 4 No. 12 AWG 90° C branch circuit conductors (2 in, 2 out) • Junction box provided with removable access plate, (5) 1/2" knockouts, (4) Non-metallic sheathed cable connectors and ground wire • Knockouts equipped with pryout slots • Supplied with push-in electrical connectors for fast installation.

Housing TC housing, 22-gauge steel with white finish • Remodel clamps provided with #2 Quadrex drive screws (#2 Robertson/#2 Phillips combo) • Clamps accommodate up to a 5/8" ceiling thickness.

Warranty 1-year limited warranty. This is the only warranty provided and no other statements in this specification sheet create any warranty of any kind. All other express and implied warranties are disclaimed. Complete warranty terms located at: www.acuitybrands.com/support/warranty/terms-and-conditions

Note: Actual performance may differ as a result of end-user environment and application. Specifications subject to change without notice.



PRODUCT CODES

Catalog No.	Input Voltage	Lamp Types
TC1RC W N	120V	PAR20/PAR16 Medium Base, MR16/PAR16/ES16 GU10 Base (See reverse for Trim/Lamp/Max. Wattage Ratings)

Housing and trim can be ordered together or separate, but will always ship separately.



DIMENSIONS

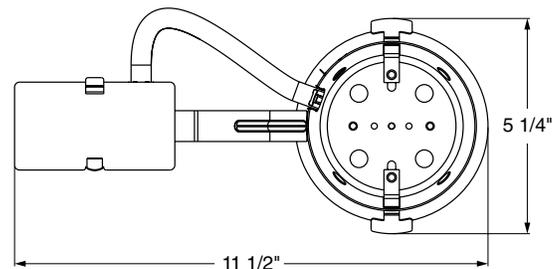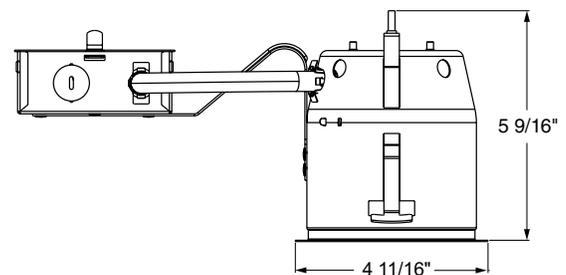

4 3/8" CEILING CUTOUT

ACCESSORIES

Catalog No.	Description
GU10WHIP	GU10 Socket Whip
SMPLT4	4" Housing Locator

To order, specify catalog number.

4" TC REMODEL HOUSING

INCANDESCENT LAMPS

TC1RC

ROUND TRIMS/ LAMPS


	Cat. No.	Description	Max. Lamp Rating
	13 WH	4" Downlight Pinhole with Integral Shield Trim - White	50W PAR20
	14 BWH ♦♦	4" Downlight Baffle Trim - Black Baffle, White Trim Ring	
	14 BSC ♦♦	4" Downlight Baffle Trim - Black Baffle, Satin Chrome Trim Ring	50W PAR20
	14 BBRZ ♦♦	4" Downlight Baffle Trim - Black Baffle, Bronze Trim Ring	
	14 BBL ♦♦	4" Downlight Baffle Trim - Black Baffle, Black Trim Ring	
	14 WWH ♦♦	4" Downlight Baffle Trim - White Baffle, White Trim Ring	
	17 CWH ♦♦	4" Downlight Cone Trim - Clear Alzak® Cone, White Trim Ring	50W PAR20
	17 BWH ♦♦	4" Downlight Cone Trim - Black Cone, White Trim Ring	
	17 PTSC ♦♦	4" Downlight Cone Trim - Pewter Cone, Satin Chrome Trim Ring	
	17 WWH ♦♦	4" Downlight Cone Trim - White Cone, White Trim Ring	
	17 HZWH ♦♦	4" Downlight Cone Trim - Haze Cone, White Trim Ring	
	17 WHZWH ♦♦	4" Downlight Cone Trim - Wheat Haze Cone, White Trim Ring	
	17 WHZBRZ ♦♦	4" Downlight Cone Trim - Wheat Haze Cone, Bronze Trim Ring	
	10 WH	4" Flush Gimbal Ringed - White	50W PAR20
	10 BL	4" Flush Gimbal Ringed - Black	
	10 SC	4" Flush Gimbal Ringed - Satin Chrome	
	10 BRZ	4" Flush Gimbal Ringed - Bronze	
	440 WH	4" Adjustable Flush Gimbal Ring Trim - White	50W MR16, PAR16, ES16 120V GU10 Base
	440 BL	4" Adjustable Flush Gimbal Ring Trim - Black	(Requires GU10WHIP)
	440 SC	4" Adjustable Flush Gimbal Ring Trim - Satin Chrome	
	440 BRZ	4" Adjustable Flush Gimbal Ring Trim - Bronze	
	445 WH	4" Adjustable Slot Aperture Trim - White	50W MR16, PAR16 ES16 120V GU10 Base, (Requires GU10WHIP)
	12 WWH ♦	4" Frosted Lens with Clear Center Trim - Perimeter Frosted Lens, Classic Aged Bronze Trim Ring	50W PAR20
	12 WSC ♦	4" Frosted Lens with Clear Center Trim - Perimeter Frosted Lens, Satin Chrome Trim Ring	
	12 WBRZ ♦	4" Frosted Lens with Clear Center Trim - Perimeter Frosted Lens, Bronze Trim Ring	
	446 WH	4" Wall Wash Adjustable Scoop Trim - White	50W MR16, PAR16 ES16 120V GU10 Base, (Requires GU10WHIP)

4" TC REMODEL HOUSING

INCANDESCENT LAMPS

TC1RC

SQUARE TRIMS/ LAMPS

	Cat. No.	Description	Max. Lamp Rating
	175Q BWH ♦♦	4" Square Downlight Trim - Black, White Trim Ring	50W PAR20
	175Q WWH ♦♦	4" Square Downlight Trim - White, White Trim Ring	
	175Q HZWH ♦♦	4" Square Downlight Trim - Haze, White Trim Ring	
	175Q WHZWH ♦♦	4" Square Downlight Trim - Wheat Haze, White Trim Ring	
	135Q WH	4" Square Pinhole Trim - White	50W PAR20
	4405Q WH	4" Square Flush Gimbal Trim - White	50W MR16
	4405Q BL	4" Square Flush Gimbal Trim - Black	120V GU10 Base (Requires GU10WHIP, 35° Vertical Adjustment)
	125Q WWH ♦	4" Square Frosted Lens with Clear Center Trim - White, White Trim Ring	50W PAR20

VULITE TRIMS/ LAMPS

	Cat. No.	Description	Max. Lamp Rating
	V4034 BWH ♦♦	4" Baffle - Black, White Trim Ring	50W PAR20
	V4034 WWH ♦♦	4" Baffle - White, White Trim Ring	
	V4010 WH	4" Gimbal Ring - White Trim Ring	50W PAR20
	V4018 WH	4" Eyeball - White Trim Ring	60W PAR16
	V4012 WH	4" Stippled Opal Lens Shower With Reflector - White Trim Ring	50W PAR20
	V4040 WH	4" Gimbal Ring - White Trim Ring	50W MR16 PAR16, ES16 120V GU10 Base (Requires GU10WHIP)
	GU10WHIP	GU10 Socket Whip	

- ♦ UL Listed for use in wet location.
- ♦♦ UL Listed for use in wet location with outdoor rated lamp.

Trim Size: 5" O.D.
Alzak is a registered trademark of Alcoa Corp.
Note: In Canada when insulation is present,
Type IC fixtures must be used.