




Atlanta, Georgia

Phone 800-521-7326

Fax 770-745-1333

Flat Washer USS Low Carbon Zinc & Hot Dip Galvanized ASTM F844

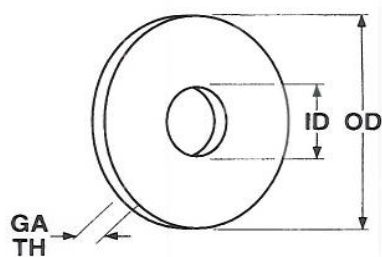

Zinc	HDG	Inside Diameter				Outside Diameter			Thickness			Approximate
Catalog#	Catalog#	Bolt Size	Nominal	Min	Max	Nominal	Min	Max	American Std. (Gauge)	Min	Max	Quantity in 50 Lbs.
316FWUSSZJ	N/A	3/16	1/4	0.245	0.265	9/16	.557	0.577	18 (3/64)	0.0360	0.0650	18050
14FWUSSZJ	14FWHDG	1/4	5/16	0.307	0.327	3/4	.727	0.749	16 (1/16)	0.0510	0.0800	7450
516FWUSSZJ	516FWHDG	5/16	3/8	0.370	0.390	7/8	.868	0.905	14 (5/64)	0.0640	0.1040	4350
38FWUSSZJ	38FWHDG	3/8	7/16	0.433	0.453	1	0.993	1.030	14 (5/64)	0.0640	0.1040	3350
716FWUSSZJ	716FWHDG	7/16	1/2	0.495	0.515	1-1/4	1.243	1.280	14 (5/64)	0.0640	0.1040	2050
12FWUSSZJ	12FWHDG	1/2	9/16	0.557	0.577	1-3/8	1.368	1.405	12 (7/64)	0.0860	0.1320	1300
916FWUSSZJ	916FWHDG	9/16	5/8	0.620	0.640	1-1/2	1.462	1.499	12 (7/64)	0.0860	0.1320	1100
58FWUSSZJ	58FWHDG	5/8	11/16	0.681	0.718	1-3/4	1.743	1.780	10 (9/64)	0.1080	0.1600	650
34FWUSSZJ	34FWHDG	3/4	13/16	0.805	0.842	2	1.993	2.030	9 (5/32)	0.1220	0.1770	455
78FWUSSZ	78FWHDG	7/8	15/16	0.931	0.968	2-1/4	2.243	2.280	8 (11/64)	0.1360	0.1920	325
1FWUSSZJ	1FWHDG	1	1-1/16	1.055	1.092	2-1/2	2.493	2.530	8 (11/64)	0.1360	0.1920	265
118FWUSSZ	118FWHDG	1-1/8	1-1/4	1.243	1.280	2-3/4	2.743	2.780	8 (11/64)	0.1360	0.1920	225
114FWUSSZ	114FWHDG	1-1/4	1-3/8	1.368	1.405	3	2.993	3.030	8 (11/64)	0.1360	0.1920	190
Non Stock	Non Stock	1-3/8	1-1/2	1.490	1.545	3-1/4	3.240	3.295	7 (3/16)	0.1530	0.2130	150
112FWUSSZ	112FWHDG	1-1/2	1-5/8	1.615	1.670	3-1/2	3.490	3.545	7 (3/16)	0.1530	0.2130	130
Non Stock	Non Stock	1-5/8	1-3/4	1.740	1.795	3-3/4	3.740	3.795	7 (3/16)	0.1530	0.2130	115
134FWUSSZ	134FWHDG	1-3/4	1-7/8	1.865	1.920	4	3.990	4.045	7 (3/16)	0.1530	0.2130	100
Non Stock	Non Stock	1-7/8	2	1.990	2.045	4-1/4	4.240	4.295	7 (3/16)	0.1530	0.2130	90
Non Stock	Non Stock	2	2-1/8	2.115	2.170	4-1/2	4.490	4.545	7 (3/16)	0.1530	0.2130	79
Non Stock	Non Stock	2-1/4	2-3/8	2.365	2.420	4-3/4	4.740	4.795	5 (7/32)	0.1930	0.2480	60
Non Stock	Non Stock	2-1/2	2-5/8	2.615	2.670	5	4.990	5.045	4 (15/64)	0.2100	0.2800	52
Non Stock	Non Stock	2-3/4	2-7/8	2.865	2.940	5-1/4	5.240	5.315	3 (1/4)	0.2280	0.3100	45
Non Stock	Non Stock	3	3-1/8	3.115	3.190	5-1/2	5.490	5.565	2 (5/32)	0.2490	0.3270	43
ASME B18.21.1-2009			Material		Steel							

Zinc Plated Washers Are Plated According to ASTM F1941/F1941M Specifications

Hot Dipped Galvanized Washers Are Plated According to ASTM A153 Specifications

Peco Fasteners specification sheets are a reference guide to help in the selection of fasteners. Peco has made every effort to ensure the accuracy of the information. However, Peco Fasteners is not responsible for any errors that may be contained within these sheets. Peco Fasteners makes no claim of warranty in the accuracy of this information. Users of this information are solely responsible for protecting themselves against liability. It is solely the responsibility of the purchasers and users of these fasteners to consult with Engineers that are experts in an applicable field. Peco Fasteners is not responsible for any loss, claim, or damage due to these specification sheets.




Atlanta, Georgia

Phone 800-521-7326

Fax 770-745-1333

Flat Washer USS Low Carbon Zinc & Hot Dip Galvanized ASTM F844

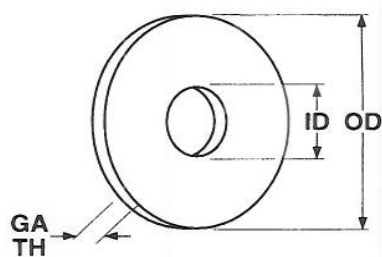

Zinc	HDG	Inside Diameter				Outside Diameter			Thickness			Approximate
Catalog#	Catalog#	Bolt Size	Nominal	Min	Max	Nominal	Min	Max	American Std. (Gauge)	Min	Max	Quantity in 50 Lbs.
316FWUSSZJ	N/A	3/16	1/4	0.245	0.265	9/16	.557	0.577	18 (3/64)	0.0360	0.0650	18050
14FWUSSZJ	14FWHDG	1/4	5/16	0.307	0.327	3/4	.727	0.749	16 (1/16)	0.0510	0.0800	7450
516FWUSSZJ	516FWHDG	5/16	3/8	0.370	0.390	7/8	.868	0.905	14 (5/64)	0.0640	0.1040	4350
38FWUSSZJ	38FWHDG	3/8	7/16	0.433	0.453	1	0.993	1.030	14 (5/64)	0.0640	0.1040	3350
716FWUSSZJ	716FWHDG	7/16	1/2	0.495	0.515	1-1/4	1.243	1.280	14 (5/64)	0.0640	0.1040	2050
12FWUSSZJ	12FWHDG	1/2	9/16	0.557	0.577	1-3/8	1.368	1.405	12 (7/64)	0.0860	0.1320	1300
916FWUSSZJ	916FWHDG	9/16	5/8	0.620	0.640	1-1/2	1.462	1.499	12 (7/64)	0.0860	0.1320	1100
58FWUSSZJ	58FWHDG	5/8	11/16	0.681	0.718	1-3/4	1.743	1.780	10 (9/64)	0.1080	0.1600	650
34FWUSSZJ	34FWHDG	3/4	13/16	0.805	0.842	2	1.993	2.030	9 (5/32)	0.1220	0.1770	455
78FWUSSZ	78FWHDG	7/8	15/16	0.931	0.968	2-1/4	2.243	2.280	8 (11/64)	0.1360	0.1920	325
1FWUSSZJ	1FWHDG	1	1-1/16	1.055	1.092	2-1/2	2.493	2.530	8 (11/64)	0.1360	0.1920	265
118FWUSSZ	118FWHDG	1-1/8	1-1/4	1.243	1.280	2-3/4	2.743	2.780	8 (11/64)	0.1360	0.1920	225
114FWUSSZ	114FWHDG	1-1/4	1-3/8	1.368	1.405	3	2.993	3.030	8 (11/64)	0.1360	0.1920	190
Non Stock	Non Stock	1-3/8	1-1/2	1.490	1.545	3-1/4	3.240	3.295	7 (3/16)	0.1530	0.2130	150
112FWUSSZ	112FWHDG	1-1/2	1-5/8	1.615	1.670	3-1/2	3.490	3.545	7 (3/16)	0.1530	0.2130	130
Non Stock	Non Stock	1-5/8	1-3/4	1.740	1.795	3-3/4	3.740	3.795	7 (3/16)	0.1530	0.2130	115
134FWUSSZ	134FWHDG	1-3/4	1-7/8	1.865	1.920	4	3.990	4.045	7 (3/16)	0.1530	0.2130	100
Non Stock	Non Stock	1-7/8	2	1.990	2.045	4-1/4	4.240	4.295	7 (3/16)	0.1530	0.2130	90
Non Stock	Non Stock	2	2-1/8	2.115	2.170	4-1/2	4.490	4.545	7 (3/16)	0.1530	0.2130	79
Non Stock	Non Stock	2-1/4	2-3/8	2.365	2.420	4-3/4	4.740	4.795	5 (7/32)	0.1930	0.2480	60
Non Stock	Non Stock	2-1/2	2-5/8	2.615	2.670	5	4.990	5.045	4 (15/64)	0.2100	0.2800	52
Non Stock	Non Stock	2-3/4	2-7/8	2.865	2.940	5-1/4	5.240	5.315	3 (1/4)	0.2280	0.3100	45
Non Stock	Non Stock	3	3-1/8	3.115	3.190	5-1/2	5.490	5.565	2 (5/32)	0.2490	0.3270	43
ASME B18.21.1-2009			Material		Steel							

Zinc Plated Washers Are Plated According to ASTM F1941/F1941M Specifications

Hot Dipped Galvanized Washers Are Plated According to ASTM A153 Specifications

Peco Fasteners specification sheets are a reference guide to help in the selection of fasteners. Peco has made every effort to ensure the accuracy of the information. However, Peco Fasteners is not responsible for any errors that may be contained within these sheets. Peco Fasteners makes no claim of warranty in the accuracy of this information. Users of this information are solely responsible for protecting themselves against liability. It is solely the responsibility of the purchasers and users of these fasteners to consult with Engineers that are experts in an applicable field. Peco Fasteners is not responsible for any loss, claim, or damage due to these specification sheets.