


# PRE-TERMINATED CABLES AND SEGMENT NETWORK WIRE

## LMRJ & LM-MSTP

Pre-terminated LMRJ cables for DLM local networks in lengths up to 100 feet

Cables and wire available in a choice of colors for use in exposed locations

Wattstopper LM-MSTP wire required for wired segment networks. This wire is not needed for wireless DLM networks using the wireless bridge (LMBC-600).

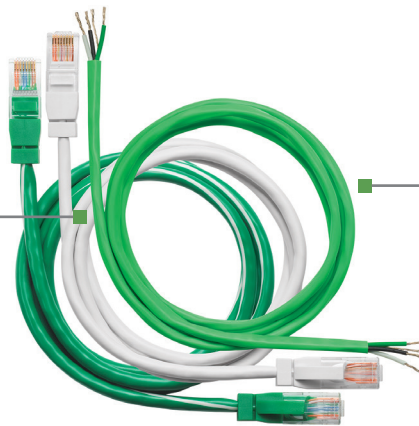

Standard green color and markings for DLM provide easy identification of LMRJ cables in plenum

UL and cUL listed and labeled

LMRJ cables available in plenum and non-plenum rating

5 year warranty



### DESCRIPTION

LMRJ Series cables connect Digital Lighting Management (DLM) components without the need for tools or point-to-point discrete wiring. Cables are pre-terminated with industry standard RJ45 connectors compatible with any RJ45 port on DLM components. LMRJ cables utilize B to B wiring.

Plenum-rated LM-MSTP Segment Network wire carries the MS/TP (RS-485) signal. Wire is 1.5 pair (twisted pair + 1 conductor) + shield, white/black/green. Use of LM-MSTP is mandatory for wired DLM network projects. Another option is to avoid the need for LM-MSTP wire through the use of wireless bridges (model LMBC-650).

### OPERATION AND APPLICATIONS

LMRJ cables can be plugged into any available RJ45 port on a DLM device and connected to any other DLM device. These cables facilitate the creation of a local network of DLM components that automatically configure and function together. While LMRJ series cables are rated Cat 5e, they are not recommended for general data use in other than DLM network applications.

LM-MSTP wire is used to create a linear topology (daisy-chain) segment network for control by a segment manager or building automation system.

### SPECIFICATIONS

- LMRJ: UL/cUL, CM 75°C, 4PR, 24AWG, FT4
- LMRJ-P: UL/cUL, CMP 75°C, 4PR, 24AWG, FT6
- LM-MSTP: UL/cUL, CMP/CL3P 75°C, 22AWG, FT6
- LM-MSTP-DB: UL/cUL, CM/CL3, 75°C, 22AWG

\*PEP designation applies to LMRJ cables only

PROJECT		LOCATION/ TYPE	
---------	--	-------------------	--

## ORDERING INFORMATION

### Non-Plenum Rated Local Network Cables

Catalog #	Green cable with white stripe	
<input type="checkbox"/> LMRJ-01	Six-inch Jumper	
<input type="checkbox"/> LMRJ-03	3' Cable	
<input type="checkbox"/> LMRJ-10	10' Cable	
<input type="checkbox"/> LMRJ-15	15' Cable	
<input type="checkbox"/> LMRJ-25	25' Cable	
<input type="checkbox"/> LMRJ-35	35' Cable	
<input type="checkbox"/> LMRJ-50	50' Cable	
<input type="checkbox"/> LMRJ-75	75' Cable	
<input type="checkbox"/> LMRJ-100	100' Cable	

### Plenum Rated Local Network Cables

Catalog #	Green cable with black stripe	Catalog #	White cable
<input type="checkbox"/> LMRJ-P03	3' Cable	<input type="checkbox"/> LMRJ-P03-W	3' Cable
<input type="checkbox"/> LMRJ-P10	10' Cable	<input type="checkbox"/> LMRJ-P10-W	10' Cable
<input type="checkbox"/> LMRJ-P15	15' Cable	<input type="checkbox"/> LMRJ-P15-W	15' Cable
<input type="checkbox"/> LMRJ-P25	25' Cable	<input type="checkbox"/> LMRJ-P25-W	25' Cable
<input type="checkbox"/> LMRJ-P35	35' Cable	<input type="checkbox"/> LMRJ-P35-W	35' Cable
<input type="checkbox"/> LMRJ-P50	50' Cable	<input type="checkbox"/> LMRJ-P50-W	50' Cable
<input type="checkbox"/> LMRJ-P75	75' Cable	<input type="checkbox"/> LMRJ-P75-W	75' Cable
<input type="checkbox"/> LMRJ-P100	100' Cable	<input type="checkbox"/> LMRJ-P100-W	100' Cable

### Unterminated Segment Network Wire

Catalog #	Description
<input type="checkbox"/> LM-MSTP	Green-jacketed segment network wire, 1.5 pair, max diameter 0.185", available by the foot, plenum rated
<input type="checkbox"/> LM-MSTP-W	White-jacketed segment network wire, 1.5 pair, max diameter 0.185", available by the foot, plenum rated
<input type="checkbox"/> LM-MSTP-B	Black-jacketed segment network wire, 1.5 pair, max diameter 0.185", available by the foot, plenum rated
<input type="checkbox"/> LM-MSTP-DB	Segment network wire, 1.5 pair, max diameter 0.185", rated for direct burial
<input type="checkbox"/> LM-MSTP-S1000	Green-jacketed LM-MSTP wire; 1000' reel, plenum rated
<input type="checkbox"/> LM-MSTP-S2000	Green-jacketed LM-MSTP wire; 2000' reel, plenum rated
<input type="checkbox"/> LM-MSTP-S4000	Green-jacketed LM-MSTP wire; 4000' reel, plenum rated

### Notice

LMRJ and LM-MSTP cables are UL-rated and listed as a CM or CMP cable, depending on the model and fall under NEC Article 800.

In NFPA 70, 2020 NEC, under Article 800 (General Requirements for Communications System), it states the following: "Informational Note No 3: Paint, plaster, cleaners, abrasives, corrosive residues, or other contaminants may result in an undetermined alteration of the wire and cable properties." (see Section 800.24).

All CM-rated cables have passed a very specific test which ensures they do not spread flames beyond what is permitted under the UL limit. You can install CM cables in the wall or ceiling. CMP-rated cables are made from material that completely retards the spread of flames. These cables are specifically designed for plenum applications.

Per the NEC, the properties of these cables may change by coming in contact with, being covered by, or otherwise exposed to other products or substances.

27402r3 Rev 09/24


# PRE-TERMINATED CABLES AND SEGMENT NETWORK WIRE

## LMRJ & LM-MSTP

Pre-terminated LMRJ cables for DLM local networks in lengths up to 100 feet

Cables and wire available in a choice of colors for use in exposed locations

Wattstopper LM-MSTP wire required for wired segment networks. This wire is not needed for wireless DLM networks using the wireless bridge (LMBC-600).

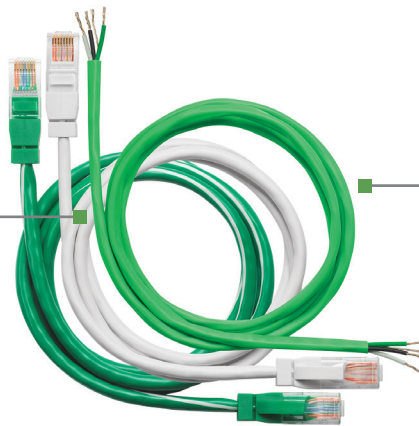

Standard green color and markings for DLM provide easy identification of LMRJ cables in plenum

UL and cUL listed and labeled

LMRJ cables available in plenum and non-plenum rating

5 year warranty



### DESCRIPTION

LMRJ Series cables connect Digital Lighting Management (DLM) components without the need for tools or point-to-point discrete wiring. Cables are pre-terminated with industry standard RJ45 connectors compatible with any RJ45 port on DLM components. LMRJ cables utilize B to B wiring.

Plenum-rated LM-MSTP Segment Network wire carries the MS/TP (RS-485) signal. Wire is 1.5 pair (twisted pair + 1 conductor) + shield, white/black/green. Use of LM-MSTP is mandatory for wired DLM network projects. Another option is to avoid the need for LM-MSTP wire through the use of wireless bridges (model LMBC-650).

### OPERATION AND APPLICATIONS

LMRJ cables can be plugged into any available RJ45 port on a DLM device and connected to any other DLM device. These cables facilitate the creation of a local network of DLM components that automatically configure and function together. While LMRJ series cables are rated Cat 5e, they are not recommended for general data use in other than DLM network applications.

LM-MSTP wire is used to create a linear topology (daisy-chain) segment network for control by a segment manager or building automation system.

### SPECIFICATIONS

- LMRJ: UL/cUL, CM 75°C, 4PR, 24AWG, FT4
- LMRJ-P: UL/cUL, CMP 75°C, 4PR, 24AWG, FT6
- LM-MSTP: UL/cUL, CMP/CL3P 75°C, 22AWG, FT6
- LM-MSTP-DB: UL/cUL, CM/CL3, 75°C, 22AWG

\*PEP designation applies to LMRJ cables only

PROJECT		LOCATION/ TYPE	
---------	--	-------------------	--

## ORDERING INFORMATION

### Non-Plenum Rated Local Network Cables

Catalog #	Green cable with white stripe	
<input type="checkbox"/> LMRJ-01	Six-inch Jumper	
<input type="checkbox"/> LMRJ-03	3' Cable	
<input type="checkbox"/> LMRJ-10	10' Cable	
<input type="checkbox"/> LMRJ-15	15' Cable	
<input type="checkbox"/> LMRJ-25	25' Cable	
<input type="checkbox"/> LMRJ-35	35' Cable	
<input type="checkbox"/> LMRJ-50	50' Cable	
<input type="checkbox"/> LMRJ-75	75' Cable	
<input type="checkbox"/> LMRJ-100	100' Cable	

### Plenum Rated Local Network Cables

Catalog #	Green cable with black stripe	Catalog #	White cable
<input type="checkbox"/> LMRJ-P03	3' Cable	<input type="checkbox"/> LMRJ-P03-W	3' Cable
<input type="checkbox"/> LMRJ-P10	10' Cable	<input type="checkbox"/> LMRJ-P10-W	10' Cable
<input type="checkbox"/> LMRJ-P15	15' Cable	<input type="checkbox"/> LMRJ-P15-W	15' Cable
<input type="checkbox"/> LMRJ-P25	25' Cable	<input type="checkbox"/> LMRJ-P25-W	25' Cable
<input type="checkbox"/> LMRJ-P35	35' Cable	<input type="checkbox"/> LMRJ-P35-W	35' Cable
<input type="checkbox"/> LMRJ-P50	50' Cable	<input type="checkbox"/> LMRJ-P50-W	50' Cable
<input type="checkbox"/> LMRJ-P75	75' Cable	<input type="checkbox"/> LMRJ-P75-W	75' Cable
<input type="checkbox"/> LMRJ-P100	100' Cable	<input type="checkbox"/> LMRJ-P100-W	100' Cable

### Unterminated Segment Network Wire

Catalog #	Description
<input type="checkbox"/> LM-MSTP	Green-jacketed segment network wire, 1.5 pair, max diameter 0.185", available by the foot, plenum rated
<input type="checkbox"/> LM-MSTP-W	White-jacketed segment network wire, 1.5 pair, max diameter 0.185", available by the foot, plenum rated
<input type="checkbox"/> LM-MSTP-B	Black-jacketed segment network wire, 1.5 pair, max diameter 0.185", available by the foot, plenum rated
<input type="checkbox"/> LM-MSTP-DB	Segment network wire, 1.5 pair, max diameter 0.185", rated for direct burial
<input type="checkbox"/> LM-MSTP-S1000	Green-jacketed LM-MSTP wire; 1000' reel, plenum rated
<input type="checkbox"/> LM-MSTP-S2000	Green-jacketed LM-MSTP wire; 2000' reel, plenum rated
<input type="checkbox"/> LM-MSTP-S4000	Green-jacketed LM-MSTP wire; 4000' reel, plenum rated

### Notice

LMRJ and LM-MSTP cables are UL-rated and listed as a CM or CMP cable, depending on the model and fall under NEC Article 800.

In NFPA 70, 2020 NEC, under Article 800 (General Requirements for Communications System), it states the following: "Informational Note No 3: Paint, plaster, cleaners, abrasives, corrosive residues, or other contaminants may result in an undetermined alteration of the wire and cable properties." (see Section 800.24).

All CM-rated cables have passed a very specific test which ensures they do not spread flames beyond what is permitted under the UL limit. You can install CM cables in the wall or ceiling. CMP-rated cables are made from material that completely retards the spread of flames. These cables are specifically designed for plenum applications.

Per the NEC, the properties of these cables may change by coming in contact with, being covered by, or otherwise exposed to other products or substances.

27402r3 Rev 09/24