






## U1980-O-KK-BLG-AEP

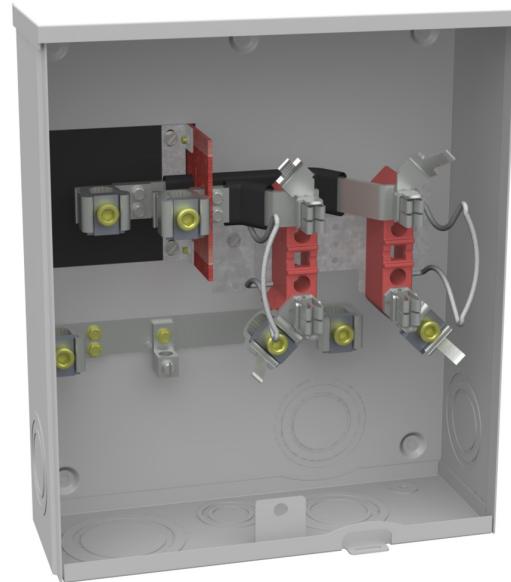

Catalog Number	U1980-O-KK-BLG-AEP	Insulation	Glass Polyester
Marketing Product Description	4 Terminal Ringless Plain Top Horn Bypass 7-8 In Barrel Lock Ground With Bracket Provision American Electric Power	Mounting	Surface Mount
UPC	784572706491	Enclosure	G90 Galvanized Steel with Powder Coat Finish
Length (IN)	4.5	Jaw Quantity	4 Terminal
Width (IN)	13	Bypass Type	Horn Bypass
Height (IN)	15.25	Number of Meter Positions	1 Position
Brand Name	Milbank	Equipment Ground	Ground Lug
Type	Ringless Meter Socket	Hub Opening	Plain Top
Special Features	American Electric Power	Line Side Wire Range	6 AWG - 350 kcmil
Application	Meter Socket	Load Side Wire Range	6 AWG - 350 kcmil
Standard	UL Listed; Type 3R	Barrel Lock Provision	9/16 Inch Knockout and Angle Bracket for Barrel Lock Guard Provision
Voltage Rating	600 Volts Alternating Current	Number Of Receptacles	0
Amperage Rating	200 Continuous Ampere		
Phase	1 Phase		
Frequency Rating	60 Hertz		
Size	4.5L x 13W x 15.25H		
Number Of Cutouts	0		
Cutout Size	No Main Breaker		
Cable Entry	Underground with Side Wireway		
Terminal	Lay in		

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

FEATURE TABLE		
ITEM	QTY	DESCRIPTION
A	5	U/L MNTG.EMBOSS
B	1	1/4, 1/2 CONC. K.O.
C	1	3/4, 1, 1 1/4, 1 1/2 CONC. K.O.
D	4	1 1/4, 1 1/2, 2, 2 1/2 CONC. K.O.
E	1	2 1/2, 3, 3 1/2 CONC. K.O.

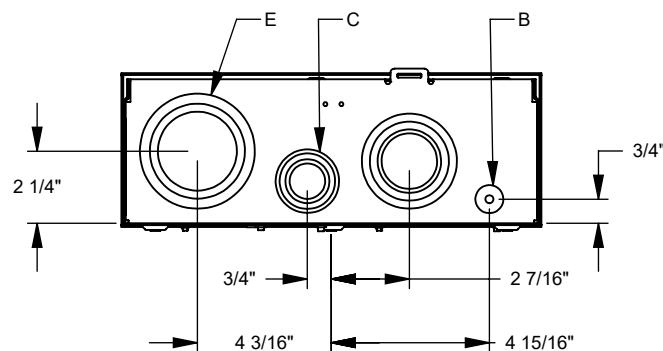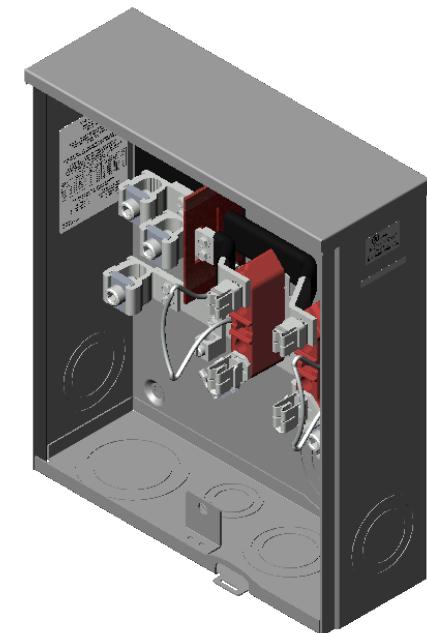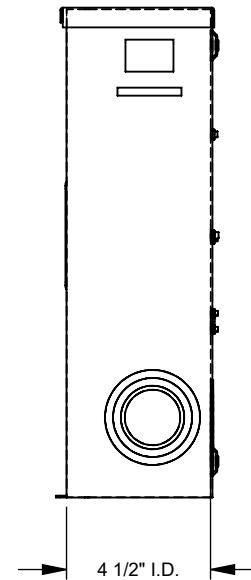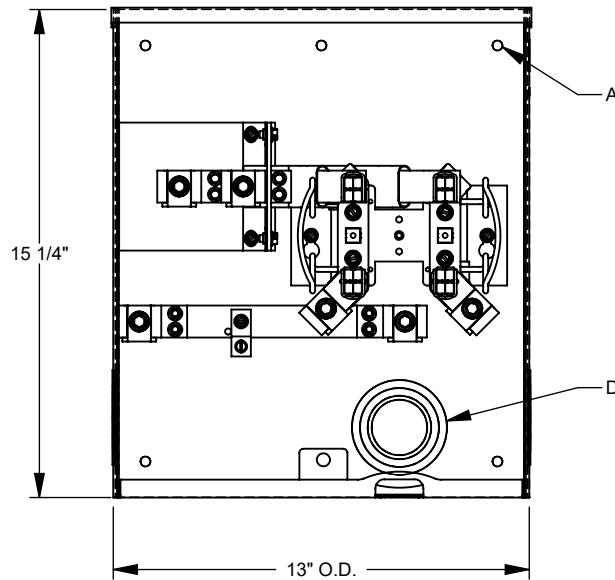


All dimensions are +/- 1/16".  
Drawing views are not to scale.

Version:

1

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.





## U1980-O-KK-BLG-AEP

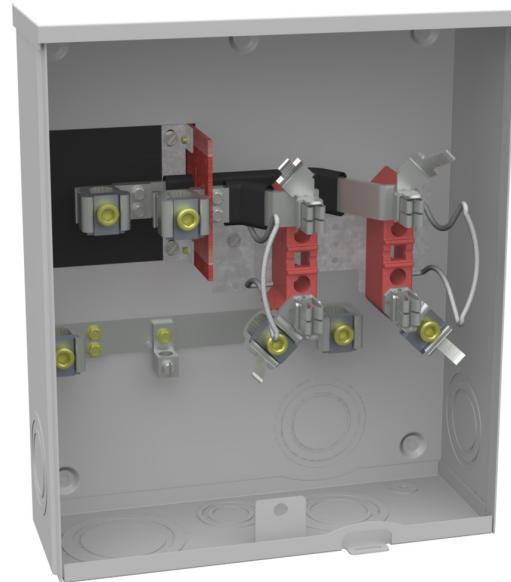

Catalog Number	U1980-O-KK-BLG-AEP	Insulation	Glass Polyester
Marketing Product Description	4 Terminal Ringless Plain Top Horn Bypass 7-8 In Barrel Lock Ground With Bracket Provision American Electric Power	Mounting	Surface Mount
UPC	784572706491	Enclosure	G90 Galvanized Steel with Powder Coat Finish
Length (IN)	4.5	Jaw Quantity	4 Terminal
Width (IN)	13	Bypass Type	Horn Bypass
Height (IN)	15.25	Number of Meter Positions	1 Position
Brand Name	Milbank	Equipment Ground	Ground Lug
Type	Ringless Meter Socket	Hub Opening	Plain Top
Special Features	American Electric Power	Line Side Wire Range	6 AWG - 350 kcmil
Application	Meter Socket	Load Side Wire Range	6 AWG - 350 kcmil
Standard	UL Listed; Type 3R	Barrel Lock Provision	9/16 Inch Knockout and Angle Bracket for Barrel Lock Guard Provision
Voltage Rating	600 Volts Alternating Current	Number Of Receptacles	0
Amperage Rating	200 Continuous Ampere		
Phase	1 Phase		
Frequency Rating	60 Hertz		
Size	4.5L x 13W x 15.25H		
Number Of Cutouts	0		
Cutout Size	No Main Breaker		
Cable Entry	Underground with Side Wireway		
Terminal	Lay in		

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

FEATURE TABLE		
ITEM	QTY	DESCRIPTION
A	5	U/L MNTG.EMBOSS
B	1	1/4, 1/2 CONC. K.O.
C	1	3/4, 1, 1 1/4, 1 1/2 CONC. K.O.
D	4	1 1/4, 1 1/2, 2, 2 1/2 CONC. K.O.
E	1	2 1/2, 3, 3 1/2 CONC. K.O.

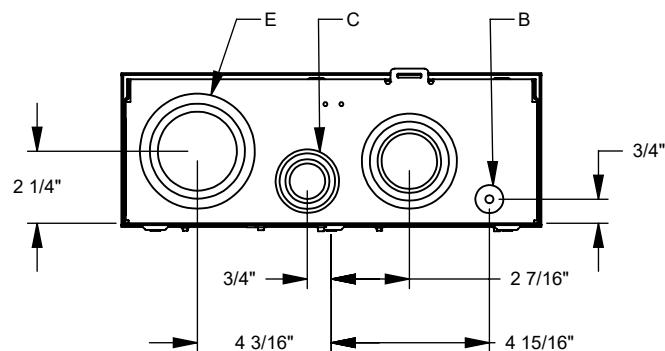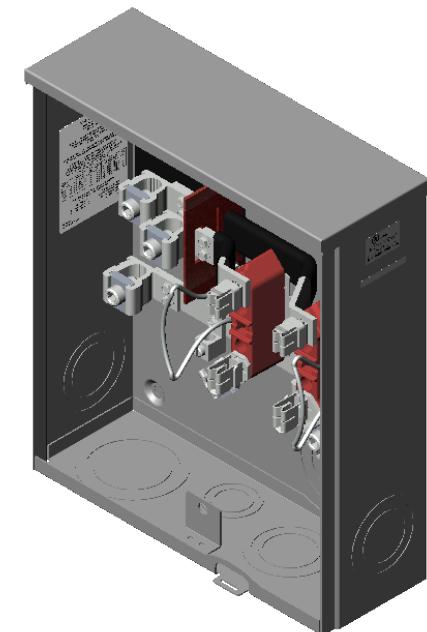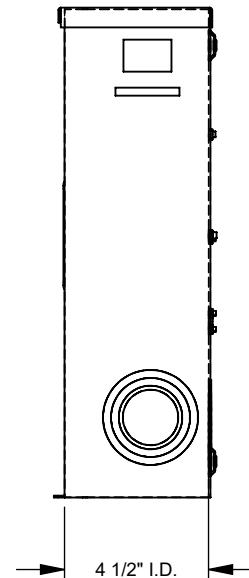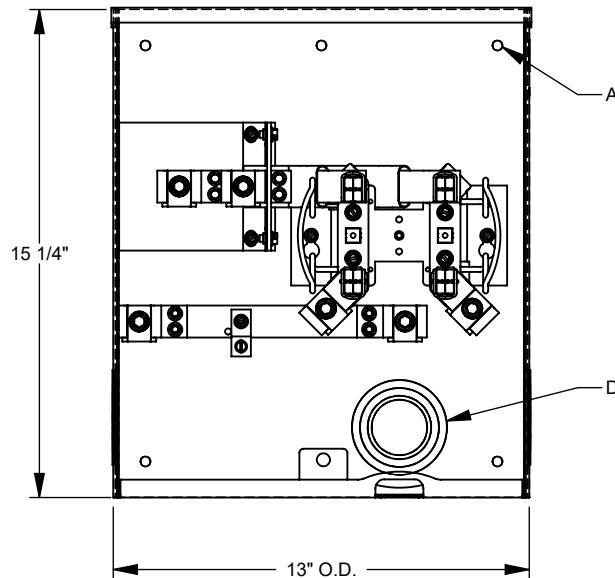

All dimensions are +/- 1/16".  
Drawing views are not to scale.

Version:

1

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.