






MILBANK
ENERGY AT WORK

U5240-O-100S




Catalog Number	U5240-O-100S	Insulation	Glass Polyester
Marketing Product Description	4 Terminal Ring Type Plain Top 1-100 Ampere Main Breaker Single Pedestal Direct Bury Series Wired	Mounting	Pedestal
UPC	784572287709	Enclosure	G90 Galvanized Steel with Powder Coat Finish
Length (IN)	10.25	Jaw Quantity	4 Terminal
Width (IN)	9.688	Bypass Type	No Bypass
Height (IN)	80	Number of Meter Positions	Single Power Head
Brand Name	Milbank	Equipment Ground	Ground Bar
Type	Ring Type Meter Socket	Hub Opening	Plain Top
Special Features	Florida Meter Group	Line Side Wire Range	6 AWG - 350 kcmil
Application	Mobile Home Power	Load Side Wire Range	1 - 3 AWG
Standard	UL Listed;Type 3R	Number Branch Circuits	4
Voltage Rating	Up to 240 Volts Alternating Current	Number Of Receptacles	0
Amperage Rating	200 Continuous Ampere		
Phase	1 Phase		
Frequency Rating	60 Hertz		
Size	10.25L x 9.688W x 80H		
Number Of Cutouts	1		
Cutout Size	One 100 Ampere Main Breaker		
Cable Entry	Underground		
Terminal	Double Mechanical		

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

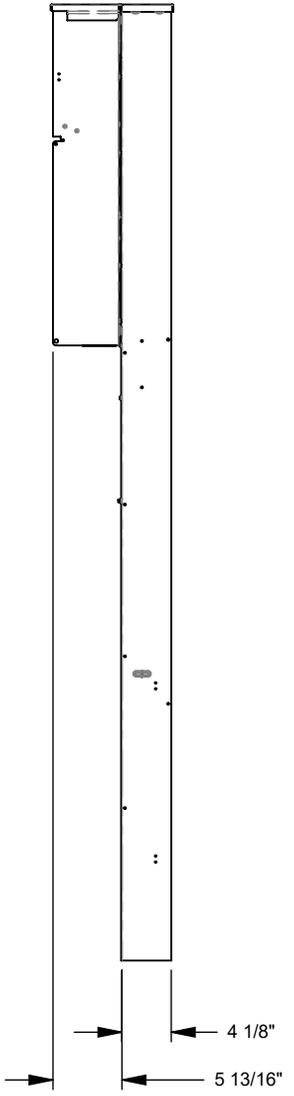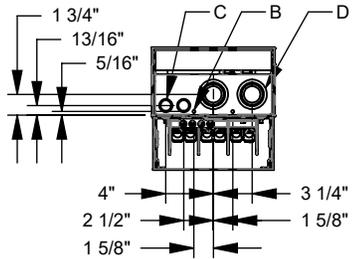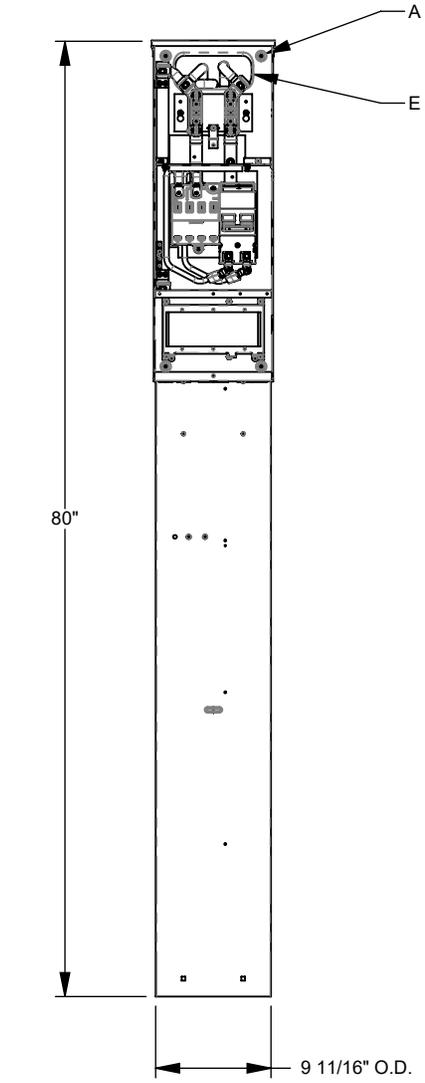

FEATURE TABLE		
ITEM	QTY	DESCRIPTION
A	4	STD. MNTG. EMBOSS
B	2	1/4 SOLID K.O.
C	2	1/2, 3/4 CONC. K.O.
D	3	1, 1 1/4, 1 1/2, 2 CONC. K.O.
E	1	WESTERN LIGHT OPENING

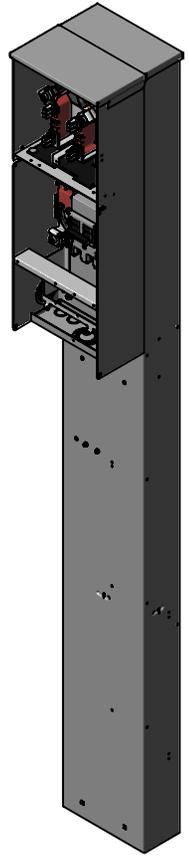

Version:

1

**All dimensions are +/- 1/16".
Drawing views are not to scale.**

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.






MILBANK
ENERGY AT WORK

U5240-O-100S




Catalog Number	U5240-O-100S	Insulation	Glass Polyester
Marketing Product Description	4 Terminal Ring Type Plain Top 1-100 Ampere Main Breaker Single Pedestal Direct Bury Series Wired	Mounting	Pedestal
UPC	784572287709	Enclosure	G90 Galvanized Steel with Powder Coat Finish
Length (IN)	10.25	Jaw Quantity	4 Terminal
Width (IN)	9.688	Bypass Type	No Bypass
Height (IN)	80	Number of Meter Positions	Single Power Head
Brand Name	Milbank	Equipment Ground	Ground Bar
Type	Ring Type Meter Socket	Hub Opening	Plain Top
Special Features	Florida Meter Group	Line Side Wire Range	6 AWG - 350 kcmil
Application	Mobile Home Power	Load Side Wire Range	1 - 3 AWG
Standard	UL Listed;Type 3R	Number Branch Circuits	4
Voltage Rating	Up to 240 Volts Alternating Current	Number Of Receptacles	0
Amperage Rating	200 Continuous Ampere		
Phase	1 Phase		
Frequency Rating	60 Hertz		
Size	10.25L x 9.688W x 80H		
Number Of Cutouts	1		
Cutout Size	One 100 Ampere Main Breaker		
Cable Entry	Underground		
Terminal	Double Mechanical		

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

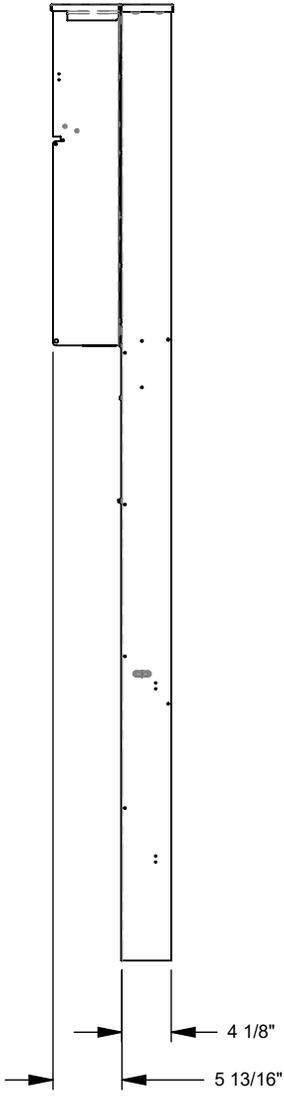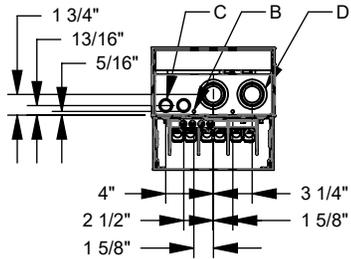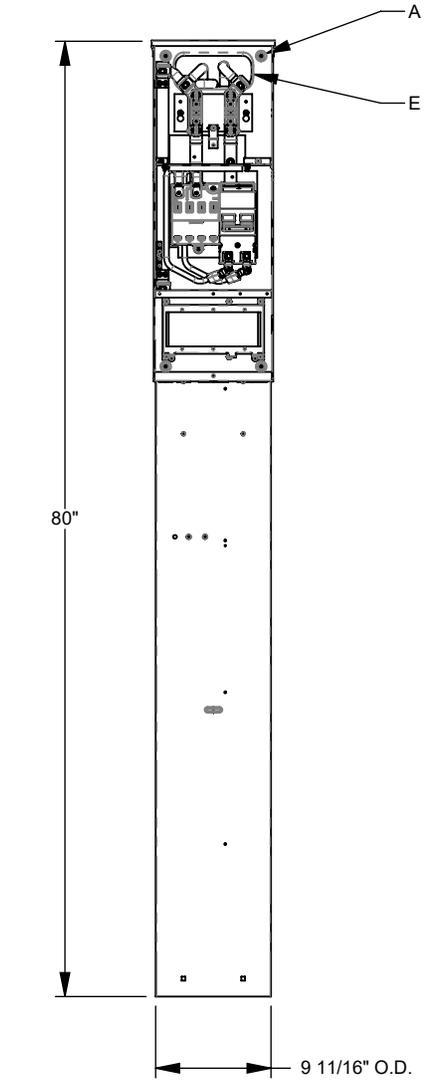

FEATURE TABLE		
ITEM	QTY	DESCRIPTION
A	4	STD. MNTG. EMBOSS
B	2	1/4 SOLID K.O.
C	2	1/2, 3/4 CONC. K.O.
D	3	1, 1 1/4, 1 1/2, 2 CONC. K.O.
E	1	WESTERN LIGHT OPENING

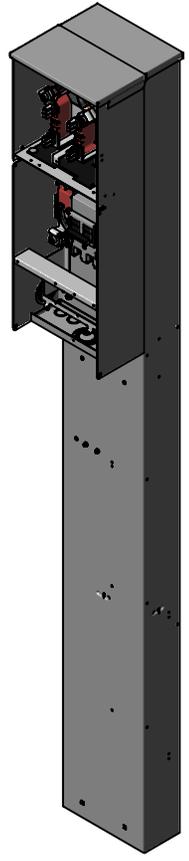

Version:

1

**All dimensions are +/- 1/16".
Drawing views are not to scale.**

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.